



SL18200

Malco®

Work. Perform. *Outlast.*



Work. Perform. Outlast.

In 1950, Mark Keymer, a young steel supply salesman, manufactured and marketed a pipe crimper he had invented for installing metal ductwork in heating systems. He insisted on quality construction, setting the benchmark for the new company. The rest is Malco history. Customer brand loyalty, carefully cultivated over the past 70 years, reflects Malco's commitment to innovative, dependable, high-performance hand tools and accessories for specialized markets in the heating, ventilation, air-conditioning, and refrigeration (HVACR) industry; exterior remodeling field, including roofing, siding, and gutter installation; fence, deck, and rail installation; and auto body repair. We manufacture work saving products that make the tough jobs easier. The pros do more. You sell more.




Proud to Support Students

Malco is proud to support students learning a trade and the hard-working professionals who use Malco tools day in and day out. Each school term, Malco recognizes outstanding graduating students in the HVAC / sheet metal, building construction and autobody repair fields through the Head of the Class Student Recognition Program. Since 2005, the Head of the Class program has reached more than 77,000 students, including 3,000 "Head of the Class" honorees, representing more than 700 high school career education programs, technical schools, union Joint Apprenticeship Training Committees and industry association programs across the U.S. and Canada. Each year, Malco also recognizes five of the top "Trade Pro of the Year" HVAC professionals in the U.S. who are dedicated to the industry and on-the-job safety, as well as their communities.

1950's



Mark Keymer, a steel supply salesman, founds Malco in a garage in 1950 and establishes a legacy of innovation, efficiency, and quality.



Mark Keymer develops unique compound leverage hand tools for job-site metal fabrication.

1970's



Malco introduces self-piercing sheet metal Zip-in screws, which become a resounding success in the HVAC industry.

Operations move from Minneapolis, MN to Annandale, MN.

1990's



Demand for Max2000 Snips, Malco's answer to trade pros' widespread dissatisfaction with other brands' aviation snips, creates waiting lists at dealers.

Malco's first website is launched.

What's your favorite Malco Tool?

"My Malco Snips are my favorite tool. I've honestly tested every brand available on the east coast, and Malco wins overall. Sharpest and most durable blade I've used. They've been tested, and they last."



M2001 "Max2000®" Aviation Snips

"My favorite Malco tool would have to be the Max2000 left cutting Aviation Snips. This tool ensures I make clean, fast cuts. They have lasted me over a year, and they still work like new. I can make cuts with accuracy and they never fail me nor let me down. It is one of the tools I always ensure to have within arms reach whenever I am working with sheet metal."

TurboShear Drill Attachments

"I love the TurboShear drill attachments! While cutting duct can be challenging, TurboShears have saved me time, patience, and my hands. Nothing like getting the job done right while managing my time."

TS1 TurboShear

"I used these in my work to cut sheet metal and aluminum layouts all day 10 hour shifts 5 to 7 days a week. They held up amazingly well. I like being able to use a cordless drill to operate these shears. I saved time, money, and stress and strain. I would recommend these to anyone, tradesperson, professional or the do-it-yourselfer."

C-RHEX Cleanable, Reversible, Magnetic Hex Drivers

"My absolute favourite tool is the C-RHEX® 1/4" - 5/16", and the 5/16" - 3/8" cleanable hex drivers for my drill. These have saved me from losing single bits, plus it's so handy having all the right sizes I need all times! I show everyone all the time! These have saved me tons of time and money."

"I tell my students that all you really own is your tools and your reputation. Selecting good tools like Malco makes your job easier and the quality of work better."

2000's

Malco launches the TurboShear, a growing line of drill attachments and air tools that today number 24 models.

Redline Handles are added to Malco's compound leverage tools.



Minnesota
Inventors Hall of Fame

Malco founder Mark Keymer is inducted into the Minnesota Inventors Hall of Fame in 2007.

2010's



Malco's employee stock ownership program (ESOP) purchases majority ownership in the company, making Malco employee-owned.

2020



Celebrating
70 years of
American
Manufacturing!

In 2017 Malco transitions from Malco Products, Inc., to Malco Products, SBC, a legal designation that indicates that a specific social benefit - employee ownership, keeping jobs local and strengthening communities - is the primary driver of Malco's business decisions.



TABLE OF CONTENTS

HISTORY	2-3
C-RHEX® CLEANABLE, REVERSIBLE, HEX DRIVERS	6-9
ZIP-IN® SELF-PIERCING SHEET METAL SCREWS	10-11
BIT-TIP® DRILL AND TAP SCREWS	12-13
HVAC TOOL KITS / CUSTOM KITS	14-17
BACKPACK AND TOOL BAG	16-17
TURBOSHEAR® DRILL ATTACHMENTS	18-23
SNIPS / SEAMERS / CRIMPERS / NOTCHERS / PUNCHES	
POWER ASSISTED HOLE CUTTERS AND BITS	24-25
TURBOCRIMPER® IMPACT	26-27
ANDY® SNIPS	28-31
MAX2000® AVIATION SNIPS	32-33
AV'S® AVIATION SNIPS	34-35
AV'S® MINI AVIATION SNIPS	36
ULTRA LIGHTWEIGHT SNIPS - METAL	37
FORGED STEEL SNIPS	37
REDLINE®: SEAMERS	38-39
REDLINE®: CRIMPERS	40-41
REDLINE®: NOTCHERS	40-41
REDLINE®: SNAP LOCK PUNCH	40-41
HEX DRIVERS / HANDLES / KITS / ACCESSORIES	
CONNEXT® HEX DRIVERS, HANDLES, AND KITS	42-45
BLUE IMPACT GRADE HEX DRIVERS	46-47
ROBERTSON® / PHILLIPS HEX DRIVERS	48
QUICK-CHANGE™ EXTENSION BITS	48
MAGNETIC BIT HOLDER / ADAPTERS	48
4IN1 NUT DRIVER / 6IN1 REVERSIBLE DRIVER	49
HVAC METAL FABRICATION TOOLS	
MINI-BRAKE®	50
MINI-BRAKE® PAN-STYLE	51
FOLDING TOOLS	52
DUCT STRETCHERS	53
REDLINE® METAL HOLE PUNCH / DUCT HOLDERS	54
SHEET METAL HAMMERS	55
SCRIBES / AWLS / TRAMMEL POINTS	56
DAMPERS / SINGLE CRIMPER	57
RADIANT HEATING TOOLS	

PEX FOAM BOARD STAPLER / STAPLES	58
PEX TO WOOD STAPLER / STAPLES	59
SMART TOOL™ / SMART CLIP™ FASTENERS	60
PEX UNCOILER	61
REDLINE®: PEX TO WIRE TOOL	62
TUBE CUTTERS	63
ROOFING TOOLS	
DRIP EDGE FOLDING TOOLS	64
SEAMER AND TONGS	64
3-STATION EDGE ROLLER	65
METAL CUTTING CIRCULAR SAW BLADE	65
STONE COATED METAL ROOFING CUTTER	66
REDLINE®: NATURAL ROOFING SLATE HAND TOOLS	67
GUTTER TOOLS / ACCESSORIES	
GUTTER OUTLET PUNCH AND DIES	68
GUTTER OUTLET HOLE SAWS	69
GUTTER SCREW GUIDE	70
GUTTER NAIL DRIVER	70
TRIM NAIL PUNCHES	70
REDLINE®: GUTTER SNAP LOCK PUNCH	71
REDLINE®: DOWNSPOUT 5 BLADE CRIMPER	71
SINGLE CRIMPER	71
BLIND RIVETS	72
RIVET GUNS	73
HAND HELD MAGNETIC SWEEP	73
FLEXIBLE DUCT TOOLS	
FLEX DUCT TIE TOOLS	74
FLEX DUCT SUPPORT	75
NYLON TIES	75
FLEX DUCT CUTTER	76
FLEX DUCT SHEAR	76
FLEX DUCT MULTI-PURPOSE SHEAR	77
DUCT KNIFE	77
VINYL SIDING TOOLS	
REDLINE®: VINYL NAIL HOLE SLOT PUNCH	78
REDLINE®: VINYL SNAP LOCK PUNCH	78
VINYL SNAP LOCK PUNCH	78



All Malco tools and accessories carry a limited lifetime warranty against manufacturing defects in materials or workmanship. Go to www.malcotools.com and visit our distributor tab for detailed warranty information.

REDLINE® VINYL J-CHANNEL CUTTERS.....	79
VINYL ULTRA LIGHTWEIGHT SNIPS	80
ANDY® SNIPS: ULTRA SHARP MULTI-PURPOSE SNIPS.....	80
SIDESWIPER® II VINYL SIDING REMOVAL TOOL.....	81
VINYL CUTTING CIRCULAR SAW BLADES	81
FIBER CEMENT SIDING TOOLS	
FIBER CEMENT OVERLAP GAUGES.....	82
FIBER CEMENT FACING GAUGE.....	82
FIBER CEMENT SPEED SET.....	82
FIBER CEMENT HIDDEN NAIL CUTTER	83
REDLINE® FIBER CEMENT SNIP.....	83
FIBER CEMENT ANGLE CUTTER	84
FIBER CEMENT GUILLOTINE SHEAR.....	85
FIBER CEMENT CIRCULAR SAW BLADES	85
QUICK ACTION™ HOLE SAWS.....	86
HOLE IN ONE® HOLE SAW.....	87
VENT SAW®	87
CHAIN LINK FENCING TOOLS	
CHAIN LINK FENCE HOG RING PLIERS	88
CHAIN LINK FENCE STAPLERS.....	89
CHAIN LINK FENCE PLIERS	90
CHAIN LINK FENCE MULTI-PURPOSE PLIERS.....	91
CHAIN LINK FENCE TENSIONERS	91
OFFSET RATCHET WRENCH	91
VINYL FENCING TOOLS	
VINYL FENCE NOTCHERS	92
VINYL CUTTING CIRCULAR SAW BLADES	93
MULTI-TRACK PLIERS	93
GENERAL PURPOSE TOOLS	
RECIPROCATING SAW BLADES.....	94-95
CHANNEL SHEARS FOR METAL STUDS AND RUNNERS	96
REDLINE®: PUNCH LOCK STUD CRIMPER	97
REDLINE®: CEILING GRID PUNCH.....	97
COPPER PIPE ABRASIVES	98
FIN STRAIGHTENING TOOLS.....	98

HEAVY-DUTY TOTE TRAY	98
PIPE TOOLS.....	99
REFRIGERATION RATCHET WRENCHES	100
HEX KEY WRENCH INSERTS.....	100
STEP DRILLS.....	100
HEX KEYS	101
ELECTRICAL PLIERS.....	102
ROTARY PERCUSSION BITS.....	102
SPADE TYPE WOOD BITS.....	102
SCREW EXTRACTOR KIT.....	103
JOBBER DRILL SET / WIRE GAUGE SET.....	103
ORIFICE DRILL SET	103
LAMINATE FLOORING GUILLOTINE SHEAR	104
CAULKING GUNS	104
UTILITY KNIVES.....	105
TAPE MEASURES	106
MEASURING WHEEL.....	107
RULES / SQUARES	108
LEVELS	109

INDEX	110-111
--------------------	----------------



How to Videos:

Check out our online video collection featuring our most popular tools! These professionally made videos feature demonstrations, tips and advice for our HVAC, Roofing, Siding, Gutter and Fencing Tools markets.

Customer Service:

United States: 1-320-274-7387 / 1-800-328-3530 / Fax: 1-800-206-6760 / custsvcs@malcotools.com
 Canada: 1-320-274-2376 / 1-800-219-1085 / Fax: 1-800-222-5329
 International: 01-320-274-2376 / Fax: 01-320-274-2652 / international@malcotools.com

Distributor Locator:

To locate a Malco Distributor nearest you, go to www.malcotools.com, click on "Where to Buy."
 Search our comprehensive network to find a Malco dealer near you or browse through our online vendors.



Cleanable, Reversible, Magnetic Hex Drivers!



Malco's exclusive, dual-sided magnetic hex drivers are simple to change hex sizes with 2-EZ Technology.

Plus, you can easily remove troublesome metal shavings from the magnet by removing the socket and wiping it off!



**U.S. Patent No.
10,328,554**





What is the Perfect System?



Eliminate Magnet Damage.

The Perfect System is designed to eliminate magnet damage. C-RHEX® 1/4 in. and 5/16 in. hex drivers perfectly fit Zip-in® and Bit-Tip® screws without touching & damaging the magnet.

Save Time and Money!

The Perfect System extends the life-span of C-RHEX® hex drivers, while using the most trusted sheet metal screws on the market!

Zip-in®



(See Pages 10-11)

Bit-Tip®



(See Pages 12-13)



Specifications

C-RHEX® Cleanable, Reversible, Magnetic Hex Drivers (SAE)

Catalog Number	Description	Color Coded	Reaction	Hex Opening in.	Insert Dia. in. (mm)	Nose Dia. in. (mm)	O/A Length in. (cm)
MSHC	Cleanable, Reversible Hex Driver	Red / Yellow	Magnetic	Red 1/4 / Yellow 5/16	1/4 (6)	1/4 - 5/16 (10.92 - 12.7)	2 (5.1)
MSHLC	Cleanable, Reversible Hex Driver	Red / Yellow	Magnetic	Red 1/4 / Yellow 5/16	1/4 (6)	1/4 - 5/16 (10.92 - 12.7)	2-5/8 (6.7)
MSHMLC	Cleanable, Reversible Hex Driver	Red / Yellow	Magnetic	Red 1/4 / Yellow 5/16	1/4 (6)	1/4 - 5/16 (10.92 - 12.7)	4 (10.1)
MSHXLC	Cleanable, Reversible Hex Driver	Red / Yellow	Magnetic	Red 1/4 / Yellow 5/16	1/4 (6)	1/4 - 5/16 (10.92 - 12.7)	6 (15.2)
MSHC1	Cleanable, Reversible Hex Driver	Blue / Yellow	Magnetic	Blue 3/8 / Yellow 5/16	1/4 (6)	3/8 - 5/16 (12.7 - 14.86)	2 (5.1)
MSHLC1	Cleanable, Reversible Hex Driver	Blue / Yellow	Magnetic	Blue 3/8 / Yellow 5/16	1/4 (6)	3/8 - 5/16 (12.7 - 14.86)	2-5/8 (6.7)
MSHMLC1	Cleanable, Reversible Hex Driver	Blue / Yellow	Magnetic	Blue 3/8 / Yellow 5/16	1/4 (6)	3/8 - 5/16 (12.7 - 14.86)	4 (10.1)
MSHXLC1	Cleanable, Reversible Hex Driver	Blue / Yellow	Magnetic	Blue 3/8 / Yellow 5/16	1/4 (6)	3/8 - 5/16 (12.7 - 14.86)	6 (15.2)

Magnetic!



Specifications

C-RHEX® Cleanable, Reversible, Magnetic Hex Drivers (Metric)

Catalog Number	Description	Color Coded	Reaction	Hex Opening (mm)	Insert Dia. in. (mm)	Nose Dia. in. (mm)	O/A Length in. (cm)
MSHCM1	Cleanable, Reversible Hex Driver	Red / Yellow	Magnetic	Red 6 / Yellow 8	1/4 (6)	7/16 - 1/2 (11.1 - 12.7)	2 (5.1)
MSHMLCM1	Cleanable, Reversible Hex Driver	Red / Yellow	Magnetic	Red 6 / Yellow 8	1/4 (6)	7/16 - 1/2 (11.1 - 12.7)	4 (10.1)
MSHXLCM1	Cleanable, Reversible Hex Driver	Red / Yellow	Magnetic	Red 6 / Yellow 8	1/4 (6)	7/16 - 1/2 (11.1 - 12.7)	6 (15.2)
MSHCM3	Cleanable, Reversible Hex Driver	Red / Yellow	Magnetic	Red 7 / Yellow 8	1/4 (6)	1/2 - 9/16 (12.7 - 14.29)	2 (5.1)
MSHMLCM3	Cleanable, Reversible Hex Driver	Red / Yellow	Magnetic	Red 7 / Yellow 8	1/4 (6)	1/2 - 9/16 (12.7 - 14.29)	4 (10.1)
MSHXLCM3	Cleanable, Reversible Hex Driver	Red / Yellow	Magnetic	Red 7 / Yellow 8	1/4 (6)	1/2 - 9/16 (12.7 - 14.29)	6 (15.2)
MSHCM2	Cleanable, Reversible Hex Driver	Yellow / Blue	Magnetic	Yellow 8 / Blue 10	1/4 (6)	1/2 - 9/16 (12.7 - 14.29)	2 (5.1)
MSHMLCM2	Cleanable, Reversible Hex Driver	Yellow / Blue	Magnetic	Yellow 8 / Blue 10	1/4 (6)	1/2 - 9/16 (12.7 - 14.29)	4 (10.1)
MSHXLCM2	Cleanable, Reversible Hex Driver	Yellow / Blue	Magnetic	Yellow 8 / Blue 10	1/4 (6)	1/2 - 9/16 (12.7 - 14.29)	6 (15.2)

Magnetic!

Zip-in®



Self-Piercing Sheet Metal Screws

Rated #1, Zip-in® screws are the best selling sheet metal screws worldwide.

A unique thread design and quality controlled manufacture spell the Zip-in® difference.

Zip-in's® sophisticated heat treat process allows the screw to taper to a fine, sharp point without sacrificing critical point strength. They are also faster driving, with a greater capacity for fastening heavier gauges of sheet metal than any other self-drilling type.



A single starting thread (A) is machined down to the very tip of the point and is the source of Zip-in's® penetrating power. The second thread (B) above the point engages after initial penetration and moves the screw through very fast.



The Perfect System

*with C-RHEX®
HEX DRIVERS!
(See Pages 8-9)*

1.) Burr Free Hex Washer Slotted Head

- One 1/4 in. hex driver accommodates tall sizes of Zip-in screws.
- Full 1/4 in. (No. 8) head will not strip out of hex driver opening at any ring operation.

2.) Undercut-Indented Hex Washer Slotted Head

- Undercut - Always seats flush.

3.) Combination Lead Double Thread

- Starting thread machined down to very tip of screw point.
- Instantly penetrates and engages in heavy gauge sheet metal and layered light gauge.

4.) Sharp Tapered Point

- Quality controlled heat treat.
- Sharp tapered point will not mushroom, break or walk.
- Complete operator control with precise hole alignment.

U.S. Patent No.
D524,638



Look for the Dots! ® Trademarked & Patented Head Markings indicate one and only genuine Zip-ins®.

Zip-in®

Self-Piercing Sheet Metal Screws



CRHEX + Zip-in®
Cleanable-Reversible
The Perfect System!
(Learn more on Page 8)

Specifications

Catalog Number	Description	Head Color	Head Size	Type
Zip-in® Screws				
HW6x3/8Z	Zip-in® Screw	○ Zinc Plated	1/4 in.	Slotted Hex
HW7x1/2Z*	Zip-in® Screw	○ Zinc Plated	1/4 in.	Slotted Hex
HW8x1/2Z*	Zip-in® Screw	○ Zinc Plated	1/4 in.	Slotted Hex
HW8x3/4Z*	Zip-in® Screw	○ Zinc Plated	1/4 in.	Slotted Hex
HW8x1Z*	Zip-in® Screw	○ Zinc Plated	1/4 in.	Slotted Hex
HW8x1-1/2Z*	Zip-in® Screw	○ Zinc Plated	1/4 in.	Slotted Hex
HW8x2Z*	Zip-in® Screw	○ Zinc Plated	1/4 in.	Slotted Hex
HW10x1/2Z	Zip-in® Screw	○ Zinc Plated	1/4 in.	Slotted Hex
HW10x3/4Z	Zip-in® Screw	○ Zinc Plated	1/4 in.	Slotted Hex
HW10x1Z	Zip-in® Screw	○ Zinc Plated	1/4 in.	Slotted Hex

* Denotes popular screw sizes available in pails.

Zip-in® Square Pan Head Robertson® Style Screws

PS8x1/2Z	Pan Square Head	○ Zinc Plated	#2	Pan Square
PS10x1/2Z	Pan Square Head	○ Zinc Plated	#2	Pan Square
PS10x3/4Z	Pan Square Head	○ Zinc Plated	#2	Pan Square

Zip-in® White Painted Register Screws

HW8x1-1/2ZW	Zip-in® Screw	○ White (W)	1/4 in.	Slotted Hex
HW8x2ZW	Zip-in® Screw	○ White (W)	1/4 in.	Slotted Hex
HW8x3ZW	Zip-in® Screw	○ White (W)	1/4 in.	Slotted Hex
P08x2ZW	Zip-in® Screw	○ White (W)	#2	Phillips

Zip-in® Painted Sheet Metal Screws

HW6x3/8ZCL	Sheet Metal Screw	○ Clay (C)	1/4 in.	Slotted Hex
HW6x3/8ZMB	Sheet Metal Screw	● Musket Bronze (MB)	1/4 in.	Slotted Hex
HW6x3/8ZRB	Sheet Metal Screw	● Royal Brown (RB)	1/4 in.	Slotted Hex
HW6x3/8ZW	Sheet Metal Screw	○ White (W)	1/4 in.	Slotted Hex
HW7x1/2ZA	Sheet Metal Screw	● Almond (A)	1/4 in.	Slotted Hex
HW7x1/2ZCC	Sheet Metal Screw	○ Classic Cream (CC)	1/4 in.	Slotted Hex
HW7x1/2ZCL	Sheet Metal Screw	○ Clay (C)	1/4 in.	Slotted Hex
HW7x1/2ZRB	Sheet Metal Screw	● Royal Brown (RB)	1/4 in.	Slotted Hex
HW7x1/2ZW	Sheet Metal Screw	○ White (W)	1/4 in.	Slotted Hex
HW8x3/4ZRB	Sheet Metal Screw	● Royal Brown (RB)	1/4 in.	Slotted Hex
HW8x3/4ZW	Sheet Metal Screw	○ White (W)	1/4 in.	Slotted Hex
HW8x1ZRB	Sheet Metal Screw	● Royal Brown (RB)	1/4 in.	Slotted Hex
HW8x1ZW	Sheet Metal Screw	○ White (W)	1/4 in.	Slotted Hex

Drill-in Screws, Type A, Single Thread

HW10x1-1/2	Drill-In Screw	○ Zinc Plated	5/16 in.	Slotted Hex
HW10x2	Drill-In Screw	○ Zinc Plated	5/16 in.	Slotted Hex
HW12x2	Drill-In Screw	○ Zinc Plated	5/16 in.	Slotted Hex

Specifications

Catalog Number	Anchor Size	Screw Size(s)	For Screw Size	Uses Bit Diameter	Anchor Kit Quantity
Red Lip Plastic Anchors					
PA810	3/16 x 7/8 in.	—	8-9-10	3/16 in.	—
PA1012	1/4 x 1 in.	—	10-12	1/4 in.	—
PA1416	5/16 x 1-3/8 in.	—	14-16	5/16 in.	—
Red Lip Plastic Anchor Kits with Slotted Panhead Screws					
PA1012K	1/4 x 1 in.	SP10x1-1/4	—	1/4 in.	100
Red Lip Plastic Anchor Kits with Hex Washer Head Screws					
PA1012KW	1/4 x 1 in.	HW10x1Z	—	1/4 in.	100

Robertson® Style Square



Robertson®
Style Square
Pan Head
Zip-in® Screws



2 in. Length Phillips Oval Head



3 in. Length 1/4 in. Hex Head

Painted Sheet Metal / Drill-In Screws



Drill-In
Screws
Type A,
Single
Thread



Painted
Sheet
Metal
Screws

Packaged in
Bags and Tubs.

Plastic Anchors / Kits



PA1012K

All Red-Lip Anchor Kits contain equal quantities of anchors and screws with one matching carbide tipped drill bit.



Use Red-Lip Anchors with wood, sheet metal or lag screws. Flexible anchor is ideal for masonry or stone. Lip on collar prevents anchor from pushing through hole in hollow walls.

Consult Malco Price Book for specific package quantities available for each screw size. Count on Malco for full, accurate piece counts in every Zip-in® package you buy.

Note: Package sizes available in Bults, Pails, Tubs, & Bags.

Packaging Key:

Bulk = Z

Pail = P

Tub = T

Bag = G



Bit-Tip®


Drill & Tap Screws

*The One-Operation
Fastener with a True
Drilling Action Point*

*Bit-Tip drill and tap screws produce the
optimum hole size for a quick tight fit.*

Now even faster!

*Drill & Tap Screws drill their own holes, taps a matching
thread in steel .220 thick in less time than it takes to
drill a pilot hole for other standard fasteners.*

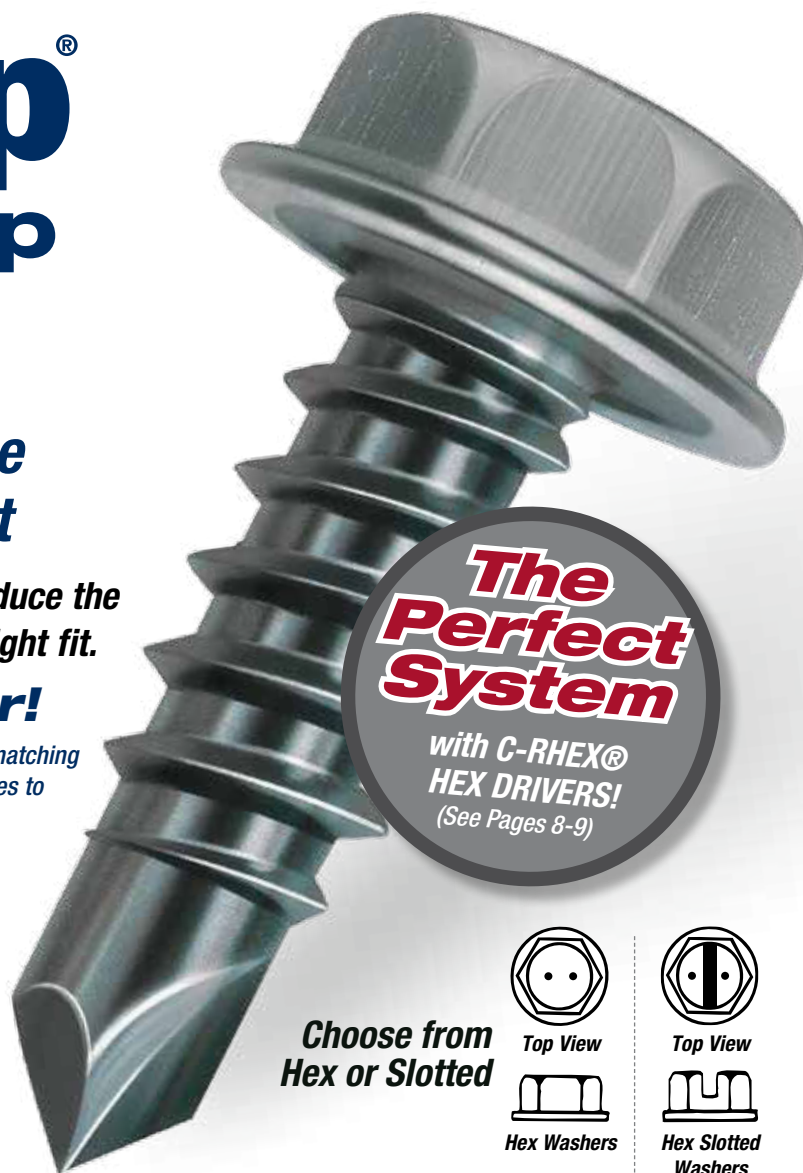

**The
Perfect
System**

with C-RHEX®
HEX DRIVERS!
(See Pages 8-9)



**Choose from
Hex or Slotted**



Top View



Hex Washers



Top View



Hex Slotted
Washers

The Bit-Tip Difference!

By drilling its own hole, Bit-Tip® produces the optimum hole size, resulting in better thread engagement and a tighter fit. One-operation fastening also means no alignment problems.

Bit-Tip® has a wide range of industry applications. Select the Bit-Tip® that's right for the job. Point length will determine metal thickness that can be drilled, tapped, and fastened.

Also, plywood, soft wood, composition board, drywall, insulation, and laminates may be fastened to metal framing or components.

Made from strong, high quality, specially heat treated steel. Bit-Tip® Self Drilling and Tapping Screws are precision cold forged insuring uniformity of dimension and drill point contours.

The versatile Bit-Tip® Screw is an excellent replacement for fastening operations now using rivets, nuts and bolts, spot welds, or adhesives. Bit-Tip® also eliminates the need for costly auxiliary fastening equipment such as drill bits, taps and welding equipment.

Requires only a standard screw gun power tool rated at 2500 RPM equipped with drilling depth locator.

U.S. Patent No.
D524,638



Look for the Dots!® Trademarked & Patented Head Markings indicate one and only genuine Zip-ins®.

Bit-Tip®

Drill & Tap

Screws



Industrial Applications:

- **Structural / Layered Metal**
- **Duct Work**

Consult Malco Price Book for specific package quantities available for each screw size. Count on Malco for full, accurate piece counts in every Bit-Tip package you buy.

Note: Package sizes available in Bults, Pails, Tubs, and Bags.

* BT143 available in pails.



Specifications

Catalog Number	Head Type	Screw Size	Driver Size	Bit-Tip® Material Thickness Recommendation						
Bit-Tip® Screws (#2 Point)				.035	.50	.100	.125	.150	.175	.200
BT131	Hex Washer	8-18x1/2	1/4	.035	.100	.110	.175	.210		
BT132	Hex Washer	8-18x5/8	1/4							
BT133	Hex Washer	8-18x3/4	1/4							
BT134	Hex Washer	8-18x1	1/4							
BT231	Slotted Hex	8-18x1/2	1/4							
BT233	Slotted Hex	8-18x3/4	1/4							
BT141	Hex Washer	10-16x1/2	5/16	.035	.100	.110	.175	.210		
BT142	Hex Washer	10-16x5/8	5/16	.110	.175	.210				
BT143*	Hex Washer	10-16x3/4	5/16							
Bit-Tip® Screws (#3 Point)				.110	.175	.210				
BT144	Hex Washer	10-16x1	5/16							
BT153	Hex Washer	10-24x3/4	5/16							
BT156	Hex Washer	10-24x1-1/2	5/16	.110	.210					
Bit-Tip® Screws (#3 Point)										
BT163	Hex Washer	12-14x3/4	5/16							
BT164	Hex Washer	12-14x1	5/16							

Bit-Tip® Screw Strength

Test results furnished are given purely as a guide and do not constitute a warranty of any type. Results may vary by modification to the fastener or in certain applications.

			Pull-out values (lbs.), in common steel gauges										Tensil Strength	Torsional Strength	
			26	24	22	20	18	16	14	13	1/8	10	3/16	lbs.	in.- lbs.
8	18	#2	150	187	289	334	507	643	977					1575	42
	16	#2	145	235	295	364	572	708	1,015	1,972				2100	61
10	24	#3								1,528	2,120	2,199		2350	65
	14	#3								1,541	1,990	2,650	3,515	2800	92

HVAC STARTER KIT



STKMR / STKMRRBP

16 Piece Starter Kit			
Catalog No.	Description		
C5R	Redline Pipe Crimper 5 Blade	M14N	14 in. (362 mm) Alum. Pattern Snip
SL1R	Redline Snap Lock Punch	A1	7/32 in. (5.54 mm) Scratch Awl
N1R	Redline Hand Notcher	SH3	Setting Hammer
S2R	Redline Hand Seamer	DS2	Offset Duct Stretcher
12F	Folding Tool	BT143G	Bit-Tips 100 pack FREE
18	Divider	HW8x1/2ZG	Zip-ins 100 pack FREE
M2001	Aviation Snip Left Cut	TS1	TurboShear
M2002	Aviation Snip Right Cut	HC1	Hole Cutter

HVAC DELUXE KIT



DSKR / DSKRBP

29 Piece Deluxe Kit

Catalog No.	Description		
C5R	Redline Pipe Crimper 5 Blade	W29	Hex Key Set
SL1R	Redline Snap Lock Punch	DB1	Dead Blow Hammer
N1R	Redline Hand Notcher	DS2	Offset Duct Stretcher
S2R	Redline Hand Seamer	MSH14	Hex Chuck
T2F	Folding Tool	MSH516	Hex Chuck
T8	Divider	L9M	Torpedo Level
M2001	Aviation Snip Left Cut	HW8x1/2ZG	Zip-ins 100 pack FREE
M2002	Aviation Snip Right Cut	BT143G	Bit-Tips 100 pack FREE
M2005	Bulldog Aviation Snip	TS1	TurboShear
M14N	14 in. (362 mm) Alum. Pattern Snip	HHD1S	1/4 in. (6.35 mm) Hex Driver Mag.
A0	1/8 in. (6.35 mm) Scratch Awl	HHD2S	5/16 in. (7.9 mm) Hex Driver Mag.
A1	7/32 in. (5.54 mm) Scratch Awl	TY4G	Tie Tool - Standard Grip
SH3	Setting Hammer	HC1	Hole Cutter
T416M	1 in. x 16 ft. Magnetic Tape Measure	4MC24	Recip Blade 6L 24T
		RD6	6-in-1 Reversible Driver

Tool Backpack

Easily organize, protect and transport your tools in a 33-pocket ballistic nylon Malco Backpack.



WIDE-OPENING
POCKETS
FOR EASY ACCESS
& VISIBILITY

TBP33

33 Pocket Backpack

Seamless, impact-resistant molded polymer base and padded side walls protect tools from drop damage and water damage. • Durable high-thread count 1690D ballistic nylon shell and heavy-duty zippers offer long service life. • 33 duo-colored pockets and pouches plus one wide-opening side and a stand-up backside make it easy to organize and find tools. • Padded and zippered exterior storage for cell phone and laptop/tablet plus two expanding bi-fold side pockets. • Comfortable, wide-padded shoulder straps and back pads help shoulder the load and save neck and back.

Catalog Number	Description	Nominal Dimensions (L x W x H) in. (cm)	Net Weight lbs. (kg)
TBP33	33 Pocket Backpack	15 x 7.5 x 20 (38 x 19 x 51)	6.05 (2.74)



Suggested Kits



Metal Roofing

TB1	Tool Bag or TBP33 Backpack	M2007	Max 2000 Right Offset Cut
DB1	Dead Blow Hammer	N2R	Hand Notcher, 1 in. Depth
HC1	Hole Cutter, Sheet Metal	S6R	6 in. Hand Seamer
HP18KR	Hole Punch Kit	SG11	Seamer & Tongs Offset Gripped
M14A	14 in. Alum. Straight Snip	18F	18" Folding Tool 3/8 - 1 in.
M12NG	12 in. Alum. Straight Snip Gripped		
M2006	Max 2000 Left Offset Cut		



Fiber Cement Siding

TB1	Tool Bag or TBP33 Backpack
FCFG	Fiber Cement Facing Gauge
FCG2	Fiber Cement Gauge Set of 2
HF7	3 in. (76 mm) Carbide Tipped HS
HF10	4-1/8 in. (105 mm) Carbide Tipped HS
TSF1	TurboShear Fiber Cement Siding
FCSR	Fiber Cement Snip
HHA4	Hole Saw Arbor and HSS Pilot Drill



Vinyl Siding

TB1	Tool Bag or TBP33 Backpack
JCCR	J-Channel Cutter 5/8 in.
M2003	Max 2000 Combo Cut
MV12	Vinyl Snip
SL5	Snap Lock Punch
SRT2	Siding Tool Straight Handle
TNP2S	Trim Nail Punch - Metal
9PK	Quick Open Utility Knife

50% Off

Backpack or Tool Bag
when ordering custom kits

How to Create a Custom Kit?

- Specify a minimum of 6 different tools per Custom Kit. Select tools that fit the dimensions of the tool bag. *(estimated max of 30 tools under 17 in. / 43 cm long.)*
- Co-Branded Tool Packaging is also available subject to quantities and selection published in Malco's "Custom Crafted Packaging" brochure #SL13847. Add three days to lead-time if including custom packaging with kit.
- 10% Discount on School Orders!**
- Ask your local Malco Distributor for details and a quote.

TB1



Tool Bag

Rugged, heavyweight nylon tool bag organizes large and small tools with ample capacity and multiple interior and exterior pockets. Open pockets as well as velcro and zippered entries also accommodate other on-the-job necessities including cell phones and MP3 players! An easy grip, lock-tight web handle and generous padded shoulder strap make this stylishly engineered bag easy to tote and a welcome alternative to heavier steel tool boxes, less durable plastic trays and boxes, or catch-all bucket pouches.

TB1

Rugged Nylon Tool Bag

Catalog Number	Description	Nominal Dimensions (L x W x H) in. (cm)	Net Weight lbs. (kg)
TB1	Rugged Nylon Tool Bag	17 x 8 x 8 (43 x 20 x 20)	4.5 (2.04)



TurboShear®

DRILL ATTACHMENTS





Trade Pro's know anything less than the best just won't cut it.

“ This tool works better than advertised. After years of hard use these things are still going strong. I wish I could meet the guy who invented this amazingly simple piece of ingenuity. ”

Long lasting blades make fast, smooth trim cuts and tight circular or rectangular cuts in metal ductwork, metal roofing and metal building panels.

Make fast straight, curved, or square cuts in most common sheet metals. A sleek, lightweight aluminum cast shear head and molded drill clamp allow maximum portability and ease to go wherever the work is.



More compact Telescoping Drill Clamp fits drills and impact drivers including lithium-ion models.

**Designed for
18 ga. Sheet Metal**

Pat. No. 9,649,702

TSHD



Catalog Number	Description	Net Wt. oz. (g)	Net Wt. lbs. (kg)
TSHD	TurboShear Heavy-Duty	—	2.2 (1.00)
Replacement Parts			
TSDC	TurboShear Drill Clamp	8 (227)	—
TSCG	TurboShear Chuck Guard	.96 (27)	—
TSHDRB	TurboShear Heavy Duty Replacement Blades	7.04 (200)	—
Metal Capacities			
Material	Spiral Duct 20 Gauge	Galvanized Steel 18 Gauge	Mild Steel 18 Gauge
inches (mm)	0.040 (1.02)	0.052 (1.32)	0.048 (1.22)





Drill Requirements:
1/4 in. (6.35 mm) Chuck,
Min. 14.4V - DC,
Max 7A-AC

Drill Requirements:
1/4 in. (6.35 mm) Chuck,
Min. 14.4V - DC,
Max 7A-AC

THE Original

The time-saving TurboShear TS1 inserts directly into the chuck of a standard 1200 rpm A/C or cordless drill. It's that easy to convert your power drill to a power shear! Cuts straight and to the left and is capable of navigating tight curved patterns and squares in heavy 20-gauge (1.02 mm) galvanized steel.

**Designed for
20 ga. Sheet Metal**

360° Rotating Collar will
not fit on this model.



TS1

Catalog Number	Description	Net Wt. oz. (g)
TS1	TurboShear, "Original"	26 (737)
Replacement Parts / Drill Clamp (one-hand use)		
TSDC	TurboShear Drill Clamp (for one-hand use)	8 (227)
TS1RB	TurboShear, "Original" Replacement Blades	5.92 (168)
Metal Capacities		
Material	Galvanized Steel 20 Gauge	Cold Rolled 20 Gauge
inches (mm)	0.040 (1.02)	0.036 (0.91)



Drill Requirements:
1/4 in. (6.35 mm) Chuck,
Min. 14.4V - DC,
Max 7A-AC

Attach to any drill for easy, clean shearing on both edges of cut. Cut either direction, as scrap spirals out of tool path when cutting.



The Double-Cut TurboShear removes a narrow spiral scrap from the tool path to produce a clean, straight edge on both sides of the cut. Approach a cut from either end to produce a quality work-piece edge. Also navigate up to 90° outside profiles of metal roofing panels, or metal ductwork, and cut through seams!

**Designed for
18 ga. Sheet Metal**

Pat. No. 9,649,702

TSMD



Catalog Number	Description	Net Wt. oz. (g)	Net Wt. lbs. (kg)
TSMD	Double-Cut TurboShear	—	2.6 (1.18)
Replacement Parts			
TSDC	TurboShear Drill Clamp	8 (227)	—
TSCG	TurboShear Chuck Guard	.96 (27)	—
TSMDRB	Double-Cut TurboShear Replacement Blades	5.6 (159)	—
Metal Capacities			
Material	Spiral Duct 20 Gauge	Galvanized Steel 18 Gauge	Mild Steel 18 Gauge
inches (mm)	0.040 (1.02)	0.052 (1.32)	0.048 (1.22)





Drill Requirements:
1/4 in. (6.35 mm) Chuck,
Min. 14.4V - DC,
Max 7A-AC



Cut corrugated mild steel with ease.
Attach to any drill to navigate
cross cuts in metal roofing panels.

This versatile and portable TurboShear fits a drill you already own to make easy cross cuts, fast lengthwise cuts, even circular and square outlet cuts in large or small pattern corrugated metal roofing and most trapezoidal (box) pattern metal roofing panels.

Designed for 30 to 24 ga.
Corrugated Sheet Metal



Pat. No. 9,649,702

TSCM



Catalog Number	Description	Net Wt. oz. (g)	Net Wt. lbs. (kg)
TSCM	Corrugated Metal TurboShear	—	2.2 (1.00)
Replacement Parts			
TSDC	TurboShear Drill Clamp	8 (227)	—
TSCG	TurboShear Chuck Guard	.96 (27)	—
TSCMRB	Corrugated Metal TurboShear Replacement Blades	6.4 (181)	—
Metal Capacities			
Material	Mild Steel - 30 - 24 Gauge		
Inches (mm)	.012 - .024 (0.31 - 0.61)		



Drill Requirements:
1/4 in. (6.35 mm) Chuck,
Min. 14.4V - DC,
Max 7A-AC



Attach to any drill to make fast
rough-hewn straight, angled or
scalloped cuts in natural roofing slate.

Make fast straight, angled, or curved cuts in 4 to 8 mm natural roofing slate. Cutting slate with finished side up produces a hand-cut appearance. A padded skid plate prevents scratches to the exposed slate finish. Cut thousands of linear feet of natural roofing slate quickly and easily all season long!

Designed for 4 to 8 mm
Natural Roofing Slate



Pat. No. 9,649,702

TSNS1



Catalog Number	Description	Net Wt. oz. (g)	Net Wt. lbs. (kg)
TSNS1	TurboShear, Natural Roofing Slate	—	2.5 (1.13)
Replacement Parts			
TSDC	TurboShear Drill Clamp	8 (227)	—
TSCG	TurboShear Chuck Guard	.96 (27)	—
TSNS1RB EV	TurboShear Replacement Blades & Skid Plate for TSNS1	9.28 (263)	—
Natural Roofing Slate Capacity			
4-8 mm Natural Roofing Slate			





Drill Requirements:
1/4 in. (6.35 mm) Chuck,
Min. 14.4V - DC,
Max 7A-AC

Use your drill to navigate all popular vinyl siding styles and power your way through thick lock seams and profiles.

Vinyl Cutting TurboShears provide easy scissor action for making straight cuts, circles, and squares in vinyl siding. A knife-like beveled blade edge quickly penetrates siding to start cut. Non-slip blades and 3/8 in. (9.53 mm) jaw opening tackles lock-seams with ease. Wide jaws combined with a 3/4 in. (19.05 mm) length of cut makes easy work of cutting through siding profiles.

Designed for cutting carpet, flashing, trim, rubber, and other vinyl type material.

Pat. No. 9,649,702

TSV1



Catalog Number	Description	Net Wt. oz. (g)	Net Wt. lbs. (kg)
TSV1	TurboShear, Vinyl Cutting	—	2.16 (0.98)
Replacement Parts			
TSDC	TurboShear Drill Clamp	8 (227)	—
TSCG	TurboShear Chuck Guard	.96 (27)	—
TSV1RB	TurboShear, Vinyl Cutting Replacement Blades	11.23 (318)	—
Designed for these Materials:			
Carpet, Flashing, Trim, Rubber, and other vinyl type material.			



Drill Requirements:
1/4 in. (6.35 mm) Chuck,
Min. 14.4V - DC,
Max 7A-AC

Make fast, clean, trim cuts in asphalt shingles along a roof valley, or tight left square cuts and circles to fit around utility outlets.

Make fast, smooth, trim cuts in multiple layers of asphalt shingles, up to 1/2 in. (12.7 mm) thick. Easily shear along a roof valley, or make tight left square cuts and circles to fit around utility outlets. An extra-wide jaw opening with beveled lead-in tip on the upper blade handles multiple shingle layers. And a wide, flat lower blade offers exceptional operator control. Heat-treated carbon steel blades with solid carbide inserts hold their edge longer in any life-rated shingle or shingle thickness.

Designed for Asphalt Shingles up to 1/2 in.

Pat. No. 9,649,702

TSS1



Catalog Number	Description	Net Wt. oz. (g)	Net Wt. lbs. (kg)
TSS1	TurboShear, Asphalt Shingles	—	2.3 (1.04)
Replacement Parts			
TSDC	TurboShear Drill Clamp	8 (227)	—
TSCG	TurboShear Chuck Guard	.96 (27)	—
TSS1RB EV	TurboShear Asphalt Shingle Replacement Blades	7.04 (200)	—





Drill Requirements:
1/4 in. (6.35 mm) Chuck,
Min. 14.4V - DC,
Max 7A-AC



WARNING: Fiber cement contains crystalline silica.
Respirable silica contained in cutting dust is known to cause cancer.



Cuts 5/16 in. (8 mm) fiber cement siding plank with minimal dust!

A wide skid-plate on the head design stabilizes cutting action for extra-smooth results in 5/16 in. (8 mm) fiber cement siding plank. This versatile shear also navigates curved-pattern cuts for window and door arches. One blade and skid plate set will last an average of 30 residential siding projects. You can even rotate the tool's skid plate to maximize cutting life.

Designed for 5/16 in. Fiber Cement Siding

Pat. No. 9,649,702

TSF1



Catalog Number	Description	Net Wt. oz. (g)	Net Wt. lbs. (kg)
TSF1	TurboShear, Fiber Cement	—	2.5 (1.13)
Replacement Parts			
TSDC	TurboShear Drill Clamp	8 (227)	—
TSCG	TurboShear Chuck Guard	.96 (27)	—
TSF1RBN	TurboShear Replacement Blades for TSF1 (shown)	9.28 (263)	—
Fiber Cement Siding Capacity			
5/16 in. (8 mm) Fiber Cement Siding			



Drill Requirements:
1/4 in. (6.35 mm) Chuck,
Min. 14.4V - DC,
Max 7A-AC



WARNING: Fiber cement contains crystalline silica.
Respirable silica contained in cutting dust is known to cause cancer.



Make fast, straight cuts and quick corners in 1/2 in. (13 mm) fiber cement backer board with minimal dust!

Designed to replace messy, imprecise, scoring and snapping methods of trimming backer board. A wide skid-plate on the head design stabilizes cutting action for extra smooth results. This versatile shear navigates curved-pattern cuts for window and door arches and will also cut 5/16-in. (8 mm) fiber cement siding plank. You can even rotate the tool's skid plate to maximize cutting life.

Designed for 1/2 in. Fiber Cement Backerboard

Pat. No. 9,649,702

TSF2



Catalog Number	Description	Net Wt. oz. (g)	Net Wt. lbs. (kg)
TSF2	TurboShear, Fiber Cement Backerboard	—	2.5 (1.13)
Replacement Parts			
TSDC	TurboShear Drill Clamp	8 (227)	—
TSCG	TurboShear Chuck Guard	.96 (27)	—
TSF2RB	TurboShear Replacement Blades for TSF2	9.28 (263)	—
Fiber Cement Siding Capacity			
1/2 in. (13 mm) Fiber Cement Backer board Siding			

HOLE CUTTERS

Malco Hole Cutters are the longest lasting, fastest cutting solution for cutting holes in sheet metal.

Cut-Away highlights Superior Components!

HC1

2-12 in. (51-305 mm)
Diameter Circles

HC2

2-20 in. (51-508 mm)
Diameter Circles

HC1 is adjustable for making 2 to 12 in. (51 to 305 mm) diameter holes. The larger HC2 model cuts 2 to 20 in. (51 to 508 mm) holes. A combination English / Metric diameter gauge is standard, and both quickly install into the chuck of any corded or cordless drill as small as 1/4 in. (6.35 mm).

The Real Difference Gold Standard Cutter Bits

Malco cutter bits feature a long lasting, mill type cutting edge and large flat for adjusting the cutting edge location up or down to extend bit life. One cutter bit fits either model and is easily replaceable. Available in single (CB), 6-pack (CBB), and 100-pack bulk tub (CB100).



Specifications



Catalog Number	Description	Steel Type	Hole Diameter in. (mm)	Net Wt. oz. (g)
HC1	Hole Cutter	—	2-12 (51-305)	16 (454)
HC2	Hole Cutter	—	2-20 (51-508)	22 (624)
CB*	Mill Type Cutter Bit (Single)	HSS (High Speed)	—	—
CBB*	Mill Type Cutter Bit (6 pack)	HSS (High Speed)	—	—
CB100*	Mill Type Cutter Bit (100 tub)	HSS (High Speed)	—	—

Metal Capacities

Material	Aluminum	Galvanized Steel 20 Gauge	Mild Steel 20 Gauge
inches (mm)	.054 (1.37)	.040 (1.02)	.036 (0.91)

Recommended
Cutter Bit Speed

**1350
RPM**
1350
TR/Min



CB
(Single)



CBB
(6-pack)



CB100
(100-pack tub)


Perfect Circles

EVERY TIME!

Lightweight aluminum frames make Malco hole cutters extremely portable for a variety of holes in sheet metal including 20-gauge (1.02 mm) galvanized steel.



For Reference

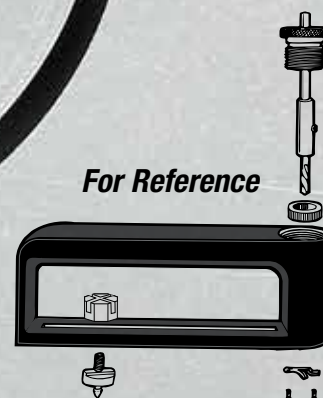

Replacement Parts

Replacement Parts

1. CB - Cutter Bit
2. HC1H - Screw Only
3. HC1E - Adjustment Sleeve (with screw included)
4. HC1D - Thrust Bearing
5. HC1K - Bearing
6. HC1G - Shoe
7. HC1I - Shoe Screws
8. HC1B - Pivot Pin Set



**78%
Faster**

THAN A MANUAL
SHEET METAL
CRIMPING TOOL!

5X Faster



Based on Actual Field Trials!

The Malco TurboCrimper IMPACT is designed to work with a minimum 12 volt DC cordless or maximum 7 amp AC corded impact driver equipped with a quick release 1/4 inch hex chuck.

Chuck it up and Go!

No set-up or adjustment is needed to immediately begin crimping multiple sizes, types, and thickness of round metal duct, including spiral duct and metal stove pipe.

Time and Labor Saving.

Simple, effective design increases speed and ease of crimping 30 – 24 gauge (0.41 – 0.71 mm) galvanized steel round duct and (0.31 - 0.61 mm) cold rolled steel stove pipe.

Storage? No Problem.

The compact TurboCrimper IMPACT is easy to balance while in use and stores easily in a pouch or bag when not in use.

Operating Tips



Begin crimping at angle



Exit crimping at slight angle



C5A2

CE



Use Impact Driver Only!

Min. 12V DC Impact Driver with quick release 1/4 in. Hex Chuck.



C5A2

Catalog Number	Description	Chuck Requirements	Impact Driver Requirements	Net Weight
C5A2	TurboCrimper IMPACT	1/4 in. Quick Release	Min. 12V DC, Max 7A AC	30 oz. (848 g)
Replacement Drive Shaft				
C5A2RD EV	Replacement Drive Shaft			
Metal Capacities				
Material	Galvanized Steel 30-24 Gauge	Cold Rolled 30-24 Gauge		
inches (mm)	0.016 - 0.034 (0.41-0.71)	0.016 - 0.034 (0.31-0.61)		



Andy[®]
SNIP

M12N



MC14N

12 in.
**HIGH CARBON
 INSET BLADES**
 with sleek aluminum
 frames for greater
 maneuverability.

Andy Snips®

Sleek styling, easy blade replacement, and larger handles make Malco's 12 in. Andy Snips more versatile. Ideal as a vinyl siding snip or for cutting aluminum, copper, or sheet metal. A sleek head design improves maneuverability. A full 3 in. (76.2 mm) cutting length makes straight shearing with the Malco Andy™ Snip fast and easy.

M12N



Andy 12 in. (31 cm)
 Pattern straight
 shearing, mild curve
 cuts, and multiple
 layers of material.

MC12N



Andy 12 in. (31 cm)
 Combination L or R
 circles to 6 in. (15 cm)
 diameter and straight cuts.

**M12NG
 Gripped**



**MC12NG
 Gripped**



14 in.
**HIGH CARBON
 INSET BLADES**
 with big aluminum
 frames for
 longer cuts.

Malco's 14 in. Andy Snip are very versatile. A sleek head design improves maneuverability. Ideal for making cuts in tight material, shapes such as J-Channel. A full 3-1/4 in. (82.6 mm) cutting length makes straight shearing with the Malco Andy™ Snip fast and easy. Blade replacement is easily accomplished in the field.

M14N



Large 14 in. (36 cm) frame
 with roomy handle loops
 and big 3-1/4 in. (82.6 mm)
 cutting length.

MC14N



Andy 14 in. (36 cm) Pattern
 straight shearing, mild curve cuts,
 and multiple layers of material.

Andy 14 in. (36 cm) Combination
 L or R circles to 6 in. (15 cm)
 diameter and straight cuts.




Specifications

Catalog Number	Description	Length of Cut in. (mm)	Tool Length in. (cm)	Net Wt. oz. (g)	Replacement Blades	
M12N	Andy 12 in. (31 cm) Pattern Snip	3 (76.2)	12 (31)	16 (454)	M12NRB	
M12NG	Andy 12 in. (31 cm) Pattern Snip "Gripped"	3 (76.2)	12 (31)	20 (567)	M12NRB	
MC12N	Andy 12 in. (31 cm) Combination Snip	3 (76.2)	12 (31)	16 (454)	MC12NRB	
MC12NG	Andy 12 in. (31 cm) Combination Snip "Gripped"	3 (76.2)	12 (31)	20 (567)	MC12NRB	
M14N	Andy 14 in. (36 cm) Pattern Snip	3-1/4 (82.6)	14 (36)	20 (567)	M14NRB	
MC14N	Andy 14 in. (36 cm) Combination Snip	3-1/4 (82.6)	14 (36)	20 (567)	MC14NRB	
Metal and Vinyl Capacities						
Material	Vinyl	Aluminum	Copper	Annealed Stainless Steel 26 Gauge	Galvanized Steel 24 Gauge	Mild Steel 24 Gauge
inches (mm)	.055 (1.40)	.035 (0.89)	.023 (0.58)	.018 (0.46)	.028 (0.71)	.024 (0.61)



Andy[®]
CLASSIC

M14A

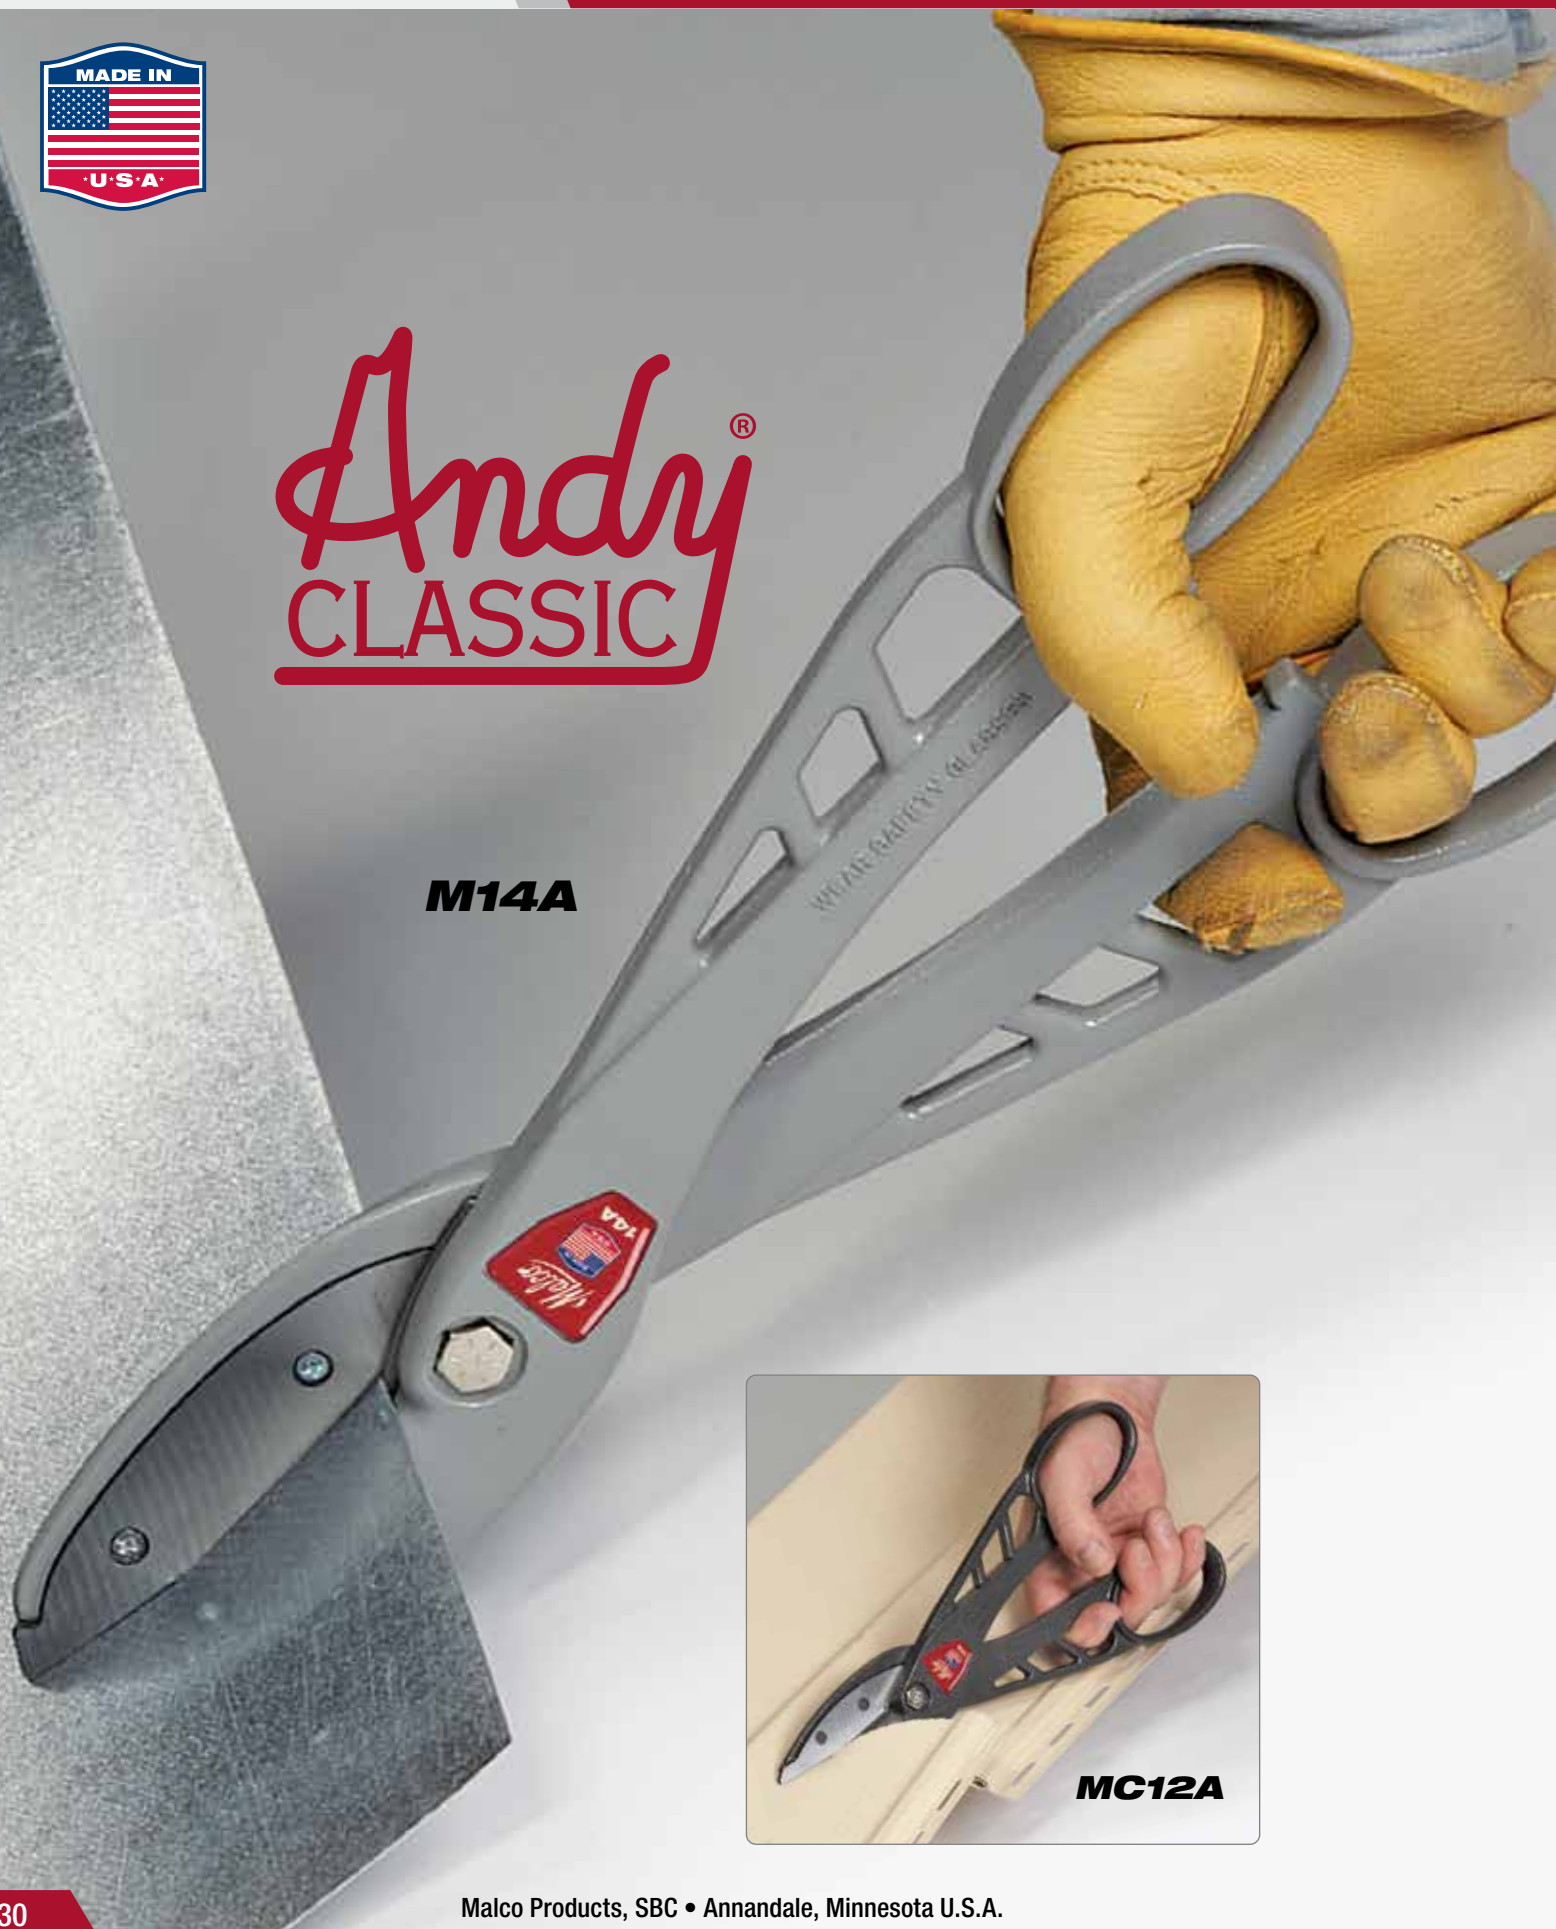

MC12A

12in.

CLASSICS

with classic aluminum frames for greater maneuverability.

Andy Snips® Classic

Original style handles make Malco's 14 in. Andy Classic snips the perfect addition to any tool bag. Ideal for cutting vinyl siding, aluminum, copper, and sheet metal. A full 3 in. (76.2 mm) cutting length makes straight shearing with the Malco Andy® Snip fast and easy. Pressure-fit inset blades make replacement easy while out in the field.

M12A



Andy Classic 12 in. (31 cm) Pattern straight shearing, mild curve cuts, and multiple layers of material.



MC12A



Andy Classic 12 in. (31 cm) Combination L or R circles to 6 in. (15 cm) diameter and straight cuts.

14in.

CLASSICS

with big aluminum classic frames for longer cuts.

Malco's original style handles make Malco's 14 in. Andy Classic snips the perfect addition to any tool bag. These snips are ideal for cutting vinyl siding, aluminum, copper, or sheet metal. A full 3 in. (76.2 mm) cutting length makes straight shearing with the Malco Andy® Snip fast and easy. Blade replacement is easily accomplished in the field.

M14A



Andy Classic 14 in. (36 cm) Pattern straight shearing, mild curve cuts, and multiple layers of material.

Blades are easily replaceable with the use of a common wrench and #2 Phillips Screw Driver.



MC14A



Andy Classic 14 in. (36 cm) Combination L or R circles to 6 in. (15 cm) diameter and straight cuts.




Specifications

Catalog Number	Description	Length of Cut in. (mm)	Tool Length in. (cm)	Net Wt. oz. (g)	Original Model Replacement Blades	Replacement Blades
M12A	Andy Classic 12 in. (31 cm) Pattern Snip	3 (76.2)	12 (31)	17 (482)	M12ARB	M12 use M12RB
MC12A	Andy Classic 12 in. (31 cm) Combination Snip	3 (76.2)	12 (31)	17 (482)	MC12ARB	MC12 use MC12RB
M14A	Andy Classic 14 in. (36 cm) Pattern Snip	3-1/4 (82.6)	14 (36)	22 (624)	M14ARB	M14 use M14RB
MC14A	Andy Classic 14 in. (36 cm) Combination Snip	3-1/4 (82.6)	14 (36)	22 (624)	MC14ARB	MC14 use MC14RB
Metal and Vinyl Capacities						
Material	Vinyl	Aluminum	Copper	Stainless Steel 26 Gauge	Galvanized Steel 24 Gauge	Mild Steel 24 Gauge
inches (mm)	.055 (1.40)	.035 (0.89)	.023 (0.58)	.018 (0.46)	.028 (0.71)	.024 (0.61)

MAX
2000

***Nothing outcuts,
outmaneuvers, or outlasts Max!***

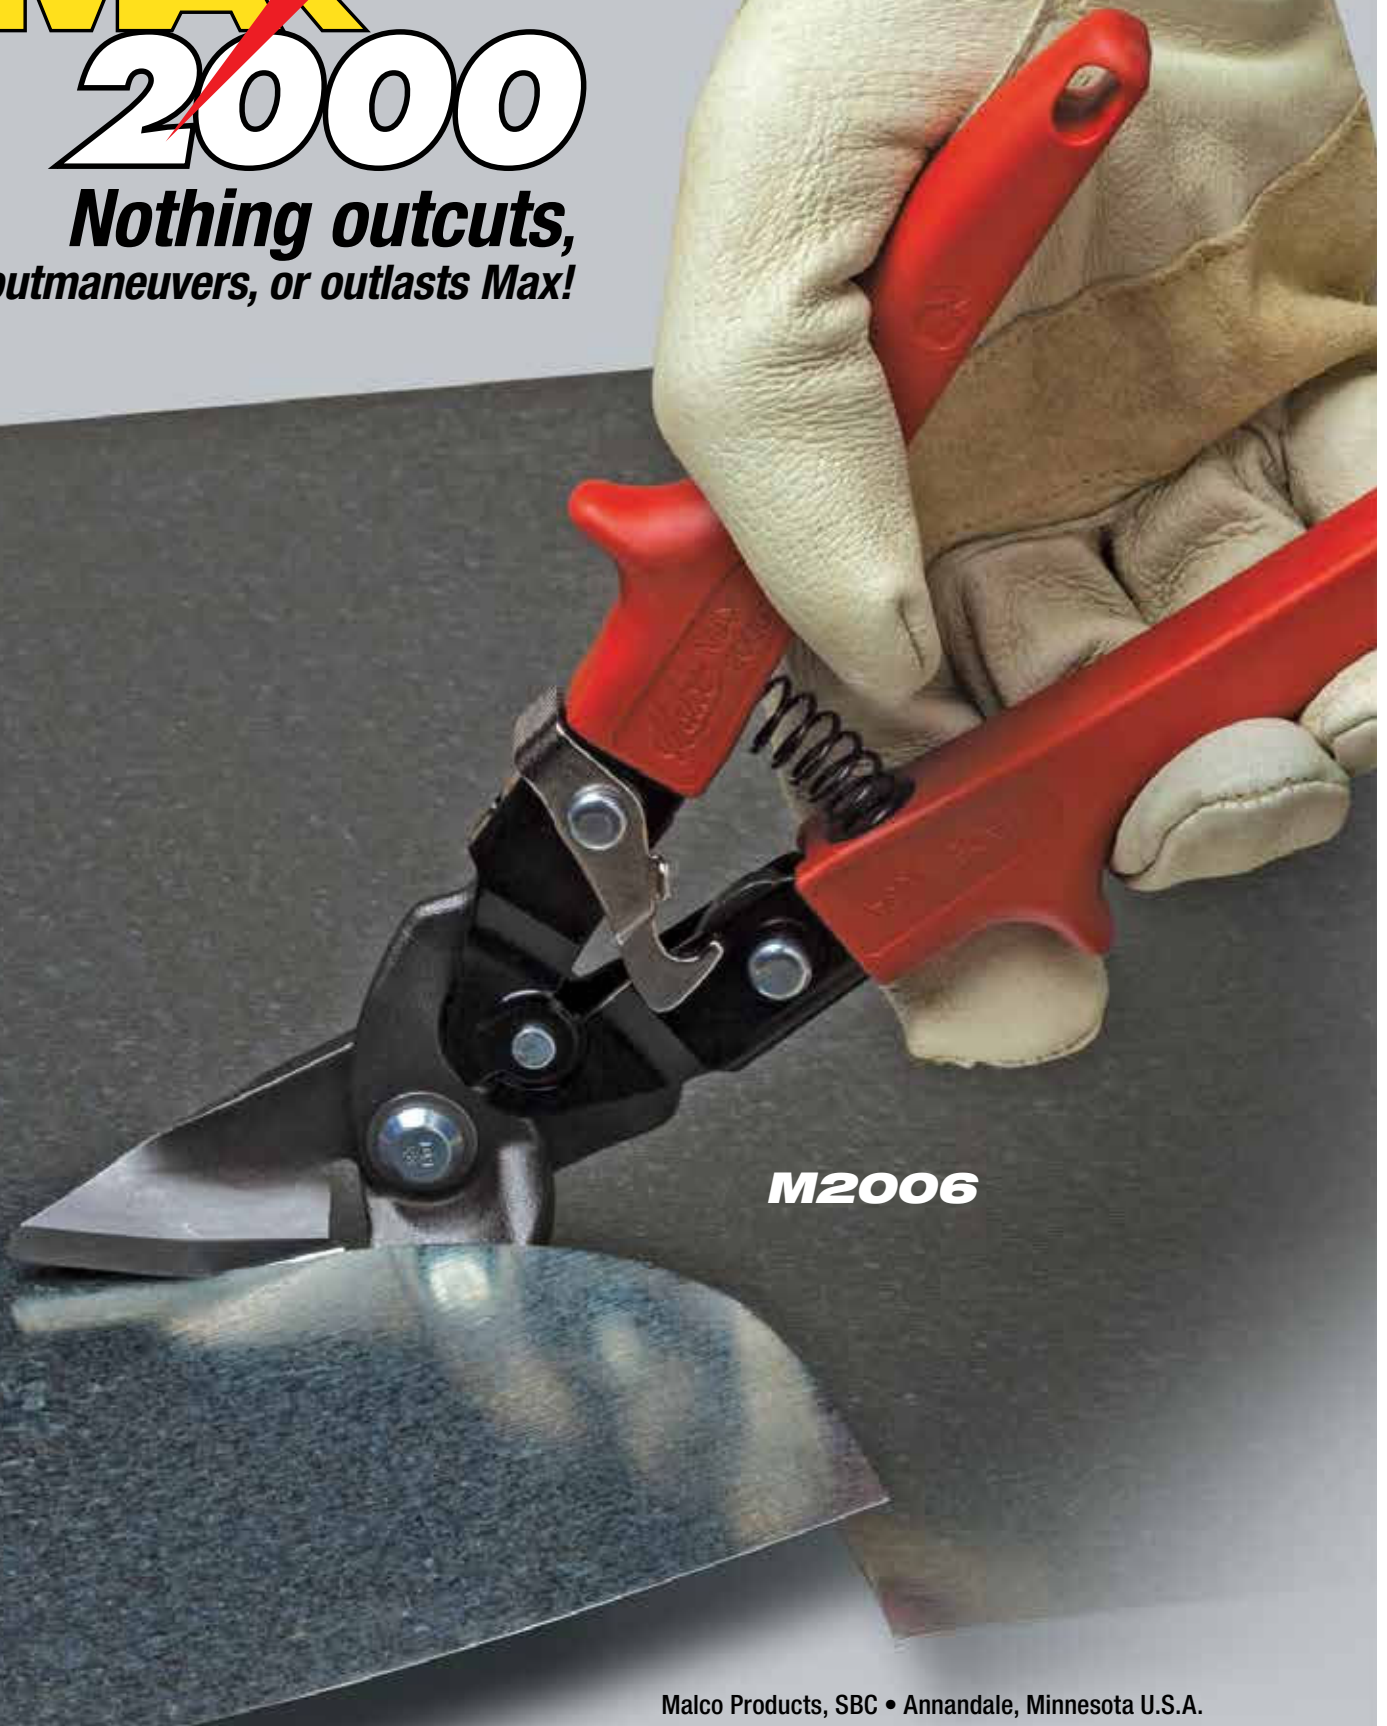

M2006

Max2000® Snips

M2001



M2003



Max2000 Left, Right, and Combination Aviation Snips

feature alloy steel blades with serrated lower jaws for solid gripping power in sheet metals, vinyl plastics, layered metals, and seams (including "S" cleats).

M2002



M2006



M2007



Versatile Max2000 Offset Right and Left Aviation Snips

feature a serrated upper jaw of hardened alloy steel and a forged steel lower jaw to produce a strong, sharply defined cutting edge for superior offset maneuverability and cutting performance.



M2004

Sharp Tipped Center Jaw

The Max2000 Double-Cut Snip employs a best of all worlds close tolerance design for consistent performance. A curved cutting edge on the center jaw reduces cutting force required and large relief grinds on all jaws minimize drag. The double cut blades feed smoothly, cut cleanly without surface distortion, and easily navigate metal seams encountered in round metal duct and stove pipe. A self-starting point on center jaw makes short work of blind cuts.

M2005



The Max2000 Bulldog Snip

features shorter blades with a serrated lower jaw for controlled notching and trimming out to the blade tip in layered sheet metals and metal seams.



Specifications

Catalog Number	Description	Cutting Application	Grip Color	Length of Cut in. (mm)	Tool Length in. (mm)	Net Wt. oz. (g)
M2001	Standard	Cuts Left	Red	1-3/8 (34.9)	10 (254)	14 (397)
M2002	Standard	Cuts Right	Green	1-3/8 (34.9)	10 (254)	14 (397)
M2003	Standard	Cuts Straight, Left and Right	Yellow	1-11/16 (42.9)	10 (254)	14 (397)
M2004	Straight Double Cut	Straight, Double Cut	Yellow	1-3/8 (34.9)	10 (254)	16 (454)
M2005	Bulldog	Notching and Trimming	Red	1-1/16 (27)	10 (254)	13 (367)
M2006	Offset	Cuts sharp left, straight, and 5 in. (125 mm) dia. circles.	Red	1-1/4 (31.8)	10 (254)	16 (454)
M2007	Offset	Cuts sharp right, straight, and 5 in. (125 mm) dia. circles.	Green	1-1/4 (31.8)	10 (254)	16 (454)

Metal Capacities

	Material	Aluminum	Copper	Stainless Steel 22 Gauge	Galvanized Steel 22 Gauge	Mild Steel 22 Gauge
M2004	inches (mm)	0.040 (1.02)	0.034 (0.86)	—	0.034 (0.86)	0.030 (0.76)
	Material	Aluminum	Copper	Stainless Steel 20 Gauge	Galvanized Steel 18 Gauge	Mild Steel 18 Gauge
All other Max Snips	inches (mm)	0.062 (1.57)	0.054 (1.37)	0.038 (0.97)	0.054 (1.37)	0.048 (1.22)

Max2000 Replacement Spring Order: M2000S - Fits all Max2000 Snips.



AV1

POWER-FIT™
PERFORMANCE HAND GRIPS

AVs® Snips

Forged Steel Aviation Snips

Malco's AVs Aviation Snips feature POWER-FIT™ Performance Hand Grips with non-slip grooves and improved safety hand guards, that evenly distribute pressure, resulting in less fatigue and increased productivity, while providing maximum grip even in the dirtiest conditions.



POWER-FIT™
PERFORMANCE HAND GRIPS

AV's Left, Right & Combination Aviation Snips

Traditional design with forged steel jaws, torsion handle spring, and side latch.



AV's Offset Right & Left Forged Snips

Forged steel upper and lower jaws with torsion handle spring and latch.



Vertical Forged Steel Aviation Snips



AV's Left & Right Vertical Aviation Snips

Left and right cutting forged serrated edge steel jaws are set at a 90 degree angle to allow easy access when cutting sheet metal in tight spaces, or overhead.



Specifications

Catalog Number	Description	Cutting Application	Grip Color	Length of Cut in. (mm)	Tool Length in. (mm)	Net Wt. oz. (g)
AV1	Standard	Left Cutting Aviation Snip	Red	1-3/8 (34.9)	9-5/8 (245)	14 (397)
AV2	Standard	Right Cutting Aviation Snip	Green	1-3/8 (34.9)	9-5/8 (245)	14 (397)
AV3	Standard	Cuts Straight, Left and Right	Yellow	1-1/2 (38.1)	9-7/8 (251)	14 (397)
AV6	Offset	Cuts sharp left, straight, and tight dia. circles	Red	1-1/4 (31.8)	9-5/8 (245)	15 (425)
AV7	Offset	Cuts sharp right, straight, and tight dia. circles	Green	1-1/4 (31.8)	9-5/8 (245)	15 (425)
AV8	Vertical	Left Cutting Vertical Aviation Snip	Red	1-3/8 (34.9)	8-3/4 (222)	16 (454)
AV9	Vertical	Right Cutting Vertical Aviation Snip	Green	1-3/8 (34.9)	8-3/4 (222)	16 (454)

Metal Capacities								
	Material	Aluminum	Copper	Stainless Steel 20 Ga.	Galvanized Steel 18 Ga.	Mild Steel 18 Ga.	Cold Rolled Steel 24 ga.	Stainless Steel 28 ga.
AV Snips	in. (mm)	0.062 (1.57)	0.054 (1.37)	0.036 (0.91)	0.052 (1.32)	0.048 (1.22)	—	—
AV Vertical AV8, AV9	in. (mm)	—	—	—	—	—	0.024 (0.61)	.028 (0.38)



BIG

**performance
miniaturized.**



Only 7-1/8 in.

At only 7-1/8 inches (181 mm), the AVsMini® easily goes to work in tight or awkward spaces where full-size aviation snips are challenged. A 3/4 inch (19 mm) length of cut provides the optimum speed for confined cutting applications where this small, maneuverable snip excels.

Each snip is made with forged steel jaws that contain precision-ground serrations on the lower blade, which produces a sharply defined edge for cutting accuracy and control.



Specifications

Catalog Number	Description	Cutting Application	Grip Color	Length of Cut in. (mm)	Tool Length in. (mm)	Net Wt. oz. (g)
AVM6 EV	Mini AVs	Left Cutting "MINI" Aviation Snip	Red	3/4 (19)	7-1/8 (181)	8 (227)
AVM7 EV	Mini AVs	Right Cutting "MINI" Aviation Snip	Green	3/4 (19)	7-1/8 (181)	8 (227)
Metal Capacities						
Material	Cold Rolled Steel 24 ga.	Stainless Steel 28 ga.				
in. (mm)	0.024 (0.61)	.028 (0.38)				



Ultra

Lightweight Snips

The ULC10 Ultra Lightweight Metal Cutting Snip offers a light, yet powerful option for cutting aluminum, and 26 gauge steel. The ULC10 has a strong, lightweight 10 inch polymer frame and is easy to grasp while making big 3 inch long controlled cuts. It also utilizes a fully threaded brass insert, thermally anchored in the blade area of the polymer frame. The insert offers greater holding power with no loss of thread integrity, resulting in superior performance.

- Strong, lightweight 10 in. (254 mm) polymer frame
- Easy-to-grasp, protective handle loops
- Big 3 in. (76 mm) long controlled cut
- Designed for all weather conditions
- Includes a Full-Size Handle



Worry Free Blade Changes

A fully threaded brass insert thermally anchored in the blade area of the polymer frame for holding power and no loss of thread integrity.



ULC10

Ultra Lightweight Snip

Catalog Number	Description	Length of Cut in. (mm)	Tool Length in. (cm)	Net Wt. oz. (g)
ULC10	Metal Cutting, Combination Snip	3 (76)	10 (254)	9.5 (254)

Metal Capacities

	Material	Aluminum	Galvanized Steel 26 Ga.	Mild Steel 26 Ga.
ULC10	in. (mm)	.030 (0.76)	0.020 (0.51)	0.018 (0.46)

Replacement Blades

ULC10	MC12ARB
-------	---------

only
10
Ounces!

ULC10



Regular Pattern Snips
For straight cutting and wide curves.

M9



M15



Bulldog Snips
Big, powerful snip for straight cuts and notches.

MD10



MD12



Circular Duckbill Snips
Maneuver and cut easily to the very tip of blade. Cut a variety of material without tearing or catching.

Specifications

Pattern, Bulldog, and Duckbill Snips

Catalog Number	Description	Length of Cut in. (mm)	Tool Length in. (cm)	Net Wt. oz. (g)
M9	Regular Pattern Snip	3 (76.2)	12-1/2 (32)	27 (766)
M15	Bulldog Pattern Snip	2-1/2 (63.5)	16-1/2 (42)	59.2 (1678)
MD10	Circular "Duckbill" Snip	2-1/2 (63.5)	10 (25)	13 (369)
MD12	Circular "Duckbill" Snip	3 (76.2)	12-1/2 (32)	27 (766)



Pattern, Bulldog and Duckbill Forged Steel Snips

- Forged steel snips offer a powerful cut
- Snips work great for straight, curved, or notched cuts
- Maneuverable cuts that go straight to the tip of the blade

REDLINE®

HANDLES by Malco

Longer Lasting Performance:

Wear resistant, hardened steel construction throughout. Hardened steel also produces greater handle strength to resist abuse and collapsing. Nickel plating resists elements.

S2R



S2R The 3-1/4 in. (83 mm) seamer is designed for the metal trades including, HVACR installation, metal roofing, and siding applications.



S6R The BIG 6 in. (152 mm) seamer is a power house for folding large bends in galvanized sheet metal.



S5R Designed with Die-Cast Zinc jaws. These seamers easily make clean bends without ruining paint finishes.



3-1/4 in. Hand Seamers

3-1/4 in. (83 mm) Jaws with
1-1/4 inch (31.8 mm) Bending Depth



6 in. Hand Seamers

Big 6 in. (152 mm) Jaws with
1-1/4 inch (31.8 mm) Bending Depth



3-1/4 in. Hand Seamers (Offset)

3-1/4 in. (83 mm) Jaws with Offset Handles.
1-1/4 inch (31.8 mm) Bending Depth



Malco Hand Seamers with forged steel jaws, are the premier choice for bending, folding, flattening and straightening sheet metal edges or safely gripping and moving sheet metal around the job site.

Designed for the metal trades, including HVACR installation, roofing and siding applications, and commercial building and remodeling, these seamers are available in 3 inch (76.2 mm) and 6 inch (152.4 mm) jaw widths as well as an offset 3 inch (76.2 mm) size for overhead work. Depth markings graduated in 1/4 inch (6.4 mm) increments are complimented by

a powerful compound leverage design. Easily bend flanges or completely flatten seams from 1/4 to 1-1/4 inch (6.4-31.8 mm) deep in 24 gauge (0.71 mm) galvanized or (0.61 mm) mild steel. Hardened steel handles resist abuse. Powerful compound leverage design. Tool also features rust resistant nickel plating.

5 in. Hand Seamers

Compact 5 in. (127 mm) Jaws
with 2 in. (51 mm) Bending Depth



9 in. Hand Seamers

Big 9 in. (229 mm) Jaws
with 2 in. (51 mm) Bending Depth



Easy Folding Bends without ruining paint finish! Die cast zinc jaws are gentle on painted or coated metal surfaces and ideal for making clean and accurate bends and seams in aluminum roof flashing, coil stock or fascia.

The jaws feature depth graduations in 1/4 inch (6.35 mm) increments to a maximum 2 inch (50.8 mm) bending depth. The jaws of these large die cast seamers are bowed so that they will hold firmly and evenly across the entire jaw width even when engaged on very light material.

These Seamers are not warranted for use as a striking tool or for prying or bending heavy ferrous sheet metal. Durable construction offers long, dependable service life under normal use. These tools also feature rust resistant nickel plating.

Specifications

Catalog Number	Description	Jaw Depth in. (mm)	Jaw Width in. (mm)	Variable Leverage Ratio (High / Low) throughout stroke	Jaws	Length in. (mm)	Net Wt. oz. (g)
S2R	3 in. Hand Seamer	1-1/4 (31.8)	3-1/4 (83)	4.7 to 1.0 - 7.1 to 1.0	High Carbon Steel Forgings	8 (203)	24 (680)
S6R	6 in. Hand Seamer	1-1/4 (31.8)	6 (152)	4.7 to 1.0 - 7.1 to 1.0	High Carbon Steel Forgings	8 (203)	30 (851)
S3R	3 in. Offset Hand Seamer	1-1/4 (31.8)	3-1/4 (83)	4.7 to 1.0 - 7.1 to 1.0	High Carbon Steel Forgings	8 (203)	24 (680)
S5R	5 in. Hand Seamer	2 (50.8)	5 (127)	4.7 to 1.0 - 7.1 to 1.0	Die Cast Zinc	9 (229)	22 (624)
S9R	9 in. Hand Seamer	2 (50.8)	9 (229)	4.7 to 1.0 - 7.1 to 1.0	Die Cast Zinc	9 (229)	28 (794)
Metal Capacities							
	Material	Aluminum	Copper	Stainless Steel 26 Gauge	Galvanized Steel 24 Gauge	Mild Steel 24 Gauge	
S2R / S6R / S3R	inches (mm)	0.035 (0.89)	0.023 (0.58)	0.018 (0.46)	0.028 (0.71)	0.024 (0.61)	
S5R / S9R	inches (mm)	0.029 (0.74)	—	—	—	—	
Replacement Spring							
5018	FITS ALL MODELS ON THIS PAGE						

REDLINE®

HANDLES by Malco

Easy Hand Motion and Greater Control:

A superior compound leverage mechanism offers maximum ease of operation. Comfortable opening and spring-actuated handles give additional comfort and control. Ergonomic Redline Handles with unique one-hand operation latch offer maximum compound leverage performance and natural fit and feel.



C5R with Longer, shallower crimps produced with the C5R result in a tighter fitting, more self supporting, leak-proof connection in sheet metal pipe & duct.



Both the **N1R** and **N2R** Notchers make Fast, Clean, 30° "V" shaped cuts for HVAC duct fabrication.



SL1R joins sheet metal, duct and pipe sections economically.

C5R



3-Blade Crimper



Ideal for crimping heavy 24 to 22 gauge (0.71 to 0.86 mm) galvanized sheet steel.

Long wearing steel components are nickel plated to resist elements. Ergonomic Redline Handles with unique one-hand operation latch offer maximum compound leverage performance and natural fit and feel.

5-Blade Crimper



Ideal for crimping heavy 24 to 22 gauge (0.71 to 0.86 mm) galvanized sheet steel.

Long wearing steel components are nickel plated to resist elements. Ergonomic Redline Handles with unique one-hand operation latch offer maximum compound leverage performance and natural fit and feel.

5-Blade Crimper (Offset)



Ideal offset crimper for tight-working quarters or working over-head.

A unique blade design keeps handles offset and keeps hands off work obstacles such as floor joists and underlayments. The handle design also promotes correct gripping of tool resulting in less wrist fatigue. Long wearing steel components are nickel plated to resist elements.

Hand Notcher (13/16 in.)



Fast and easy cutting. Notcher makes a clean 30° "V" shaped cut in sheet metal.

13/16 in. (20.6 mm) maximum throat depth. Upper cutting jaw is drop forged high impact alloy steel. Hook design of cutting jaw facilitates notching corners or take-off tabs to desired depth without slipping. Long-wearing, hardened stamped steel components.

Hand Notcher (1 in.)



The N2R Notcher punches a BIG 1 in. (25.4 mm) deep "V" notch in common 24 to 30 (0.71-0.41 mm) ga. galvanized sheet metal quickly and easily.

Folding and fabricating metal ductwork is easier than ever with the full 1 inch clearance the N2R single operation notcher provides. Precision-ground steel upper jaw and hardened stamped steel components.

Snap Lock Punch (1 in.)



Join sheet metal, duct and pipe sections economically with the Snap Lock Punch.

Punches raise a louvered shaped projection on metal edge for locking into rolled edge of sheet or piece to be joined. Metal pieces snap together and are fastened securely. Compound Handle Leverage for maximum ease of operation. Punch impression spaced 3/8 in. from edge of metal. Heavy forged cutting jaw.

Specifications

Catalog Number	Description	Throat Depth in. (mm)	Variable Leverage Ratio (High / Low) throughout stroke	Jaws	Cutting Angle	Length in. (mm)	Net Wt. oz. (g)
SC3R	3-Blade Crimper	1-1/4 (31.8)	6.6 to 1.0 - 8.7 to 1.0	Carbon Steel	—	9 (229)	14 (397)
C5R	5-Blade Crimper	1-5/8 (41.3)	6.6 to 1.0 - 8.7 to 1.0	Carbon Steel	—	9-5/8 (244)	17 (482)
C6R	Offset Pipe Crimper	1-5/8 (41.3)	—	Carbon Steel	—	—	16 (454)
N1R	Hand Notcher	13/16 (20.6)	7.4 to 1.0 - 8.0 to 1.0	Alloy Steel Forging / Carbon Steel Shell	30°	8 (203)	16 (454)
N2R	One-Inch Hand Notcher	1 (25.4)	6.6 to 1.0 - 7.0 to 1.0	Investment Casting / Carbon Steel Shell	—	—	17 (482)
SL1R	Snap Lock Punch	3/8 (9.5)	10.8 to 1.0 - 11.7 to 1.0	Alloy Steel Forging / Carbon Steel Shell	—	8 (203)	16 (454)

Metal Capacities

	Material	Aluminum	Copper	Stainless Steel 26 Gauge	Galvanized Steel 24 Gauge	Mild Steel 24 Gauge
Crimpers & Notchers	inches (mm)	0.035 (0.89)	0.023 (0.58)	0.018 (0.46)	0.028 (0.71)	0.024 (0.61)
	Material	Aluminum	Copper	Stainless Steel 24 Gauge	Galvanized Steel 22 Gauge	Mild Steel 22 Gauge
SC3R	inches (mm)	—	—	0.024 (0.61)	0.034 (0.86)	0.030 (0.76)

Replacement Spring

5018 FITS ALL MODELS ON THIS PAGE

**SINGLE CRIMPER
SEE PAGE 57**





CONNEXT®

- *Ratcheting Handle*
- *Professional Kits*
- *Handles & Hex Drivers*
- *Individual Components*

CONNEX[®] 3 Ratcheting Handle



Versatile Ratcheting Handle

A forward or reverse ratchet driving mechanism, as well as the locked driving position of the CONNEXT ratcheting handle, meets torque capacity standards (including ANSI) comparable to a 1/2-inch solid shaft driver! The clear, molded acetate, full grip is shock-proof, shatter-proof and fluted to fit any hand. The quick-connect holder mechanism accepts most 1/4 inch hex shank power drive or insert bits as a shaft, including all Malco hollow or magnetic hex chuck drivers.

CONNEX[®] 4 9 Piece Hex Hand Driver Kit:

CONNEX[®] 1 Standard Handle CONNEXT[®] 2 Stubby Handle CONNEXT[®] 3 Ratcheting Handle
MSH14 • MSH516 • MSHL14 • MSHL516 •
MSHXL14 • MSHXL516



Magnetic!

CONNEX[®] 5 12 Piece Hex Hand Driver Kit:

CONNEX[®] 1 Standard Handle CONNEXT[®] 2 Stubby Handle CONNEXT[®] 3 Ratcheting Handle
MSH1/4 • MSH5/16 • MSH3/8 • MSHL1/4 • MSHL5/16 •
MSHL3/8 • MSHXL1/4 • MSHXL5/16 • MSHXL3/8



Magnetic!

CONNEXT® Handles with Hex Drivers

Hex Hand Drivers shown here are sold pre-assembled and packaged as one product, but handles and hex drivers are also available separately.
(See page 53)



Individual Hex Drivers

Hex Drivers shown here are sold separately and also packaged in tubs and boxes of 50 and 100. (See page 53)



CONNEXT® Replacement Handles

Clear, molded acetate grips are shock-proof, shatter-proof and fluted to fit any hand. Including ratcheting handle!



Specifications

CONNEXT® Magnetic Stubby Length Hex Hand Drivers

Catalog Number	Description	Color Coded	Reaction	Hex Opening in. (mm)	Insert Dia. in. (mm)	Nose Dia. in. (mm)	Holder Dia. in. (mm)	Shaft Total Lgth. in. (mm)	Overall Length in. (cm)	Shaft Replacement #
HHD1T	CONNEXT Stubby Hex Hand Driver	●	Magnetic	1/4	1/4 (6)	7/16 (11)	11/16 (18)	2-1/4 (57)	4-1/8 (10)	MSH14
HHD2T	CONNEXT Stubby Hex Hand Driver	●	Magnetic	5/16	1/4 (6)	1/2 (13)	11/16 (18)	2-1/4 (57)	4-1/8 (10)	MSH516
HHD3T	CONNEXT Stubby Hex Hand Driver	●	Magnetic	3/8	1/4 (6)	9/16 (14)	11/16 (18)	2-1/4 (57)	4-1/8 (10)	MSH38

CONNEXT® Standard Magnetic Hex Hand Drivers

Catalog Number	Description	Color Coded	Reaction	Hex Opening in. (mm)	Insert Dia. in. (mm)	Nose Dia. in. (mm)	Holder Dia. in. (mm)	Shaft Total Lgth. in. (mm)	Overall Length in. (cm)	Shaft Replacement #
HHD1S	CONNEXT Standard Lgth. Hex Hand Driver	●	Magnetic	1/4	1/4 (6)	7/16 (11)	11/16 (18)	3 (76)	7-1/8 (18)	MSHL14
HHD2S	CONNEXT Standard Lgth. Hex Hand Driver	●	Magnetic	5/16	1/4 (6)	1/2 (13)	11/16 (18)	3 (76)	7-1/8 (18)	MSHL516
HHD3S	CONNEXT Standard Lgth. Hex Hand Driver	●	Magnetic	3/8	1/4 (6)	9/16 (14)	11/16 (18)	3 (76)	7-1/8 (18)	MSHL38

CONNEXT® Long Magnetic Hex Hand Drivers

Catalog Number	Description	Color Coded	Reaction	Hex Opening in.	Insert Dia. in. (mm)	Nose Dia. in. (mm)	Holder Dia. in. (mm)	Shaft Total Lgth. in. (mm)	Overall Length in. (cm)	Shaft Replacement #
HHD1	CONNEXT Long Hex Hand Driver	●	Magnetic	1/4	1/4 (6)	7/16 (11)	11/16 (18)	6-7/8 (175)	10-1/2 (27)	MSHXL14
HHD2	CONNEXT Long Hex Hand Driver	●	Magnetic	5/16	1/4 (6)	1/2 (13)	11/16 (18)	6-7/8 (175)	10-1/2 (27)	MSHXL516
HHD3	CONNEXT Long Hex Hand Driver	●	Magnetic	3/8	1/4 (6)	9/16 (14)	11/16 (18)	6-7/8 (175)	10-1/2 (27)	MSHXL38

CONNEXT® Short Magnetic Hex Drivers

Catalog Number	Description	Color Coded	Reaction	Hex Opening in.	Insert Dia. in. (mm)	Nose Dia. in. (mm)	Overall Length in. (mm)
MSH14	Short Magnetic Hex Driver	●	Magnetic	1/4	1/4 (6)	7/16 (11)	1-3/4 (44)
MSH14T	Short Magnetic Hex Driver (TUB of 100)	●	Magnetic	1/4	1/4 (6)	7/16 (11)	1-3/4 (44)
MSH516	Short Magnetic Hex Driver	●	Magnetic	5/16	1/4 (6)	1/2 (13)	1-3/4 (44)
MSH516T	Short Magnetic Hex Driver (TUB of 100)	●	Magnetic	5/16	1/4 (6)	1/2 (13)	1-3/4 (44)
MSH38	Short Magnetic Hex Driver	●	Magnetic	3/8	1/4 (6)	9/16 (14)	1-3/4 (44)

Long Magnetic Hex Drivers

Catalog Number	Description	Color Coded	Reaction	Hex Opening in.	Insert Dia. in. (mm)	Nose Dia. in. (mm)	Overall Length in. (mm)
MSHL14	Long Magnetic Hex Driver	●	Magnetic	1/4	1/4 (6)	7/16 (11)	2-9/16 (65)
MSHL14T	Long Magnetic Hex Driver (TUB of 50)	●	Magnetic	1/4	1/4 (6)	7/16 (11)	2-9/16 (65)
MSHL516	Long Magnetic Hex Driver	●	Magnetic	5/16	1/4 (6)	1/2 (13)	2-9/16 (65)
MSHL516T	Long Magnetic Hex Driver (TUB of 50)	●	Magnetic	5/16	1/4 (6)	1/2 (13)	2-9/16 (65)
MSHL38	Long Magnetic Hex Driver	●	Magnetic	3/8	1/4 (6)	9/16 (14)	2-9/16 (65)
MSHL716	Long Magnetic Hex Driver	●	Magnetic	7/16	1/4 (6)	11/16 (18)	2-9/16 (65)

Extra Long Magnetic Hex Drivers

Catalog Number	Description	Color Coded	Reaction	Hex Opening in.	Insert Dia. in. (mm)	Nose Dia. in. (mm)	Overall Length in. (mm)
MSHML14	Extra Long Magnetic Hex Driver	●	Magnetic	1/4	1/4 (6)	7/16 (11)	4 (102)
MSHXL14	Extra Long Magnetic Hex Driver	●	Magnetic	1/4	1/4 (6)	7/16 (11)	6 (152)
MSHXL14T	Extra Long Magnetic Hex Driver (TUB of 50)	●	Magnetic	1/4	1/4 (6)	7/16 (11)	6 (152)
MSHML516	Extra Long Magnetic Hex Driver	●	Magnetic	5/16	1/4 (6)	1/2 (13)	4 (102)
MSHXL516	Extra Long Magnetic Hex Driver	●	Magnetic	5/16	1/4 (6)	1/2 (13)	6 (152)
MSHXL516T	Extra Long Magnetic Hex Driver (TUB of 50)	●	Magnetic	5/16	1/4 (6)	1/2 (13)	6 (152)
MSHXL38	Extra Long Magnetic Hex Driver	●	Magnetic	3/8	1/4 (6)	9/16 (14)	6 (152)

CONNEXT® Quick-Change Handles

Catalog Number	Description	Grip Dia. in. (mm)	Grip Lgth. in. (mm)	Holder Opening in.	Holder Dia. in. (mm)	Holder Lgth. in. (mm)	Overall Length in. (cm)
CONNEXT1	Quick-Change Standard Handle	1-1/8 (29)	4-1/8 (105)	1/4	11/16 (18)	1-1/8 (29)	5-1/4 (133)
CONNEXT2	Quick-Change Stubby Handle	1-1/8 (29)	1-7/8 (48)	1/4	11/16 (18)	1-1/8 (29)	3-1/8 (79)

CONNEXT® Quick-Change Ratcheting Handle

Catalog Number	Description	Driving Positions	Torque Capacity	Grip Dia. in. (mm)	Grip Length in. (mm)	Holder I.D. in.	Holder O.D. in. (mm)	Holder Length in. (mm)	Overall Length in. (mm)
CONNEXT3	Ratcheting Style Handle Long	Forward, Reverse, Locked	Comp. 1/2 solid shaft	1-1/8 (29)	4-1/8 (105)	1/4 Hex	5/8 (16)	1-5/8 (41)	6-3/8 (162)


GO BLUE!

IMPACT-GRADE HEX CHUCK DRIVERS


Impact Stress Resistant • Precise Machining for Fail-Proof Fastener Engagement

Magnetic!


1/4 in.

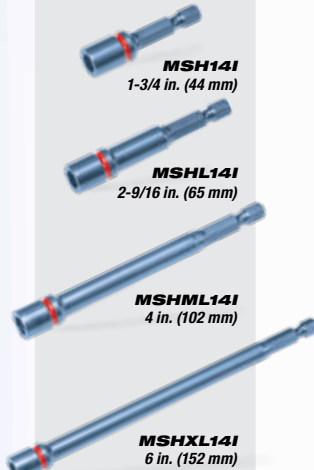

5/16 in.

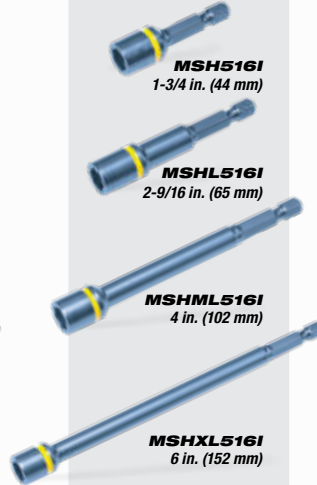

3/8 in.

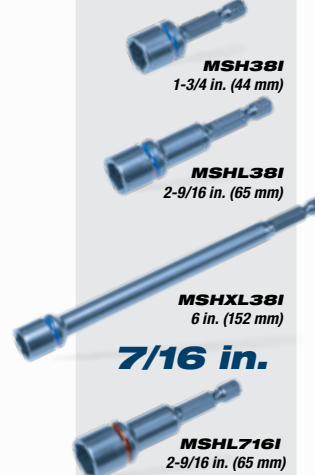


7/16 in.

**GO
BLUE**

**Impact Grade Hex Drivers,
Square, Phillips, and Star
Bits and Hex Drivers.**

Star, Phillips and Square bit
selections feature unique
high-torque steel construction
and a design that absorbs
and dissipates impact driver
induced stress at peak loads.


Square
Insert & Power Bits

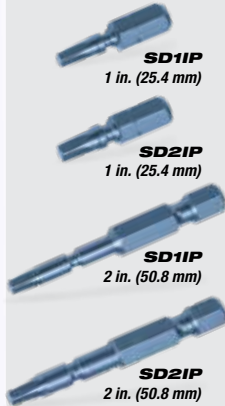

Phillips
Insert & Power Bits



Star
Insert & Power Bits

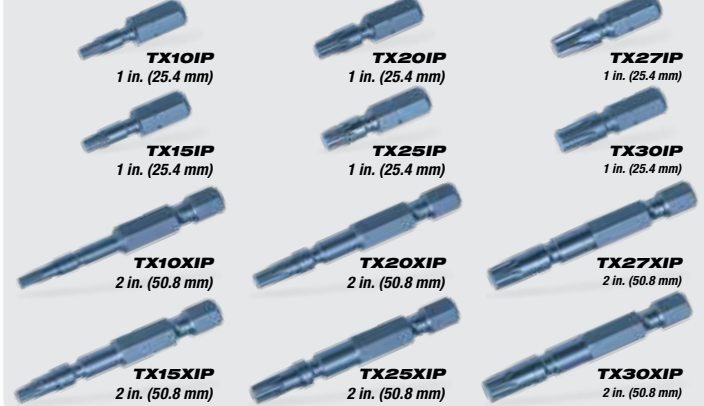

Specifications

Catalog Number	Description	Point Size	HEX Insert in. (mm)	OA Length in. (mm)
Square Insert Bits				
SD1IP	Square Insert Bit	#1	1/4 (6)	1 (25)
SD2IP	Square Insert Bit	#2	1/4 (6)	1 (25)
Square Power Bits				
SD1XIP	Square Power Bit	#1	1/4 (6)	2 (51)
SD2XIP	Square Power Bit	#2	1/4 (6)	2 (51)

Catalog Number	Description	Point Size	HEX Insert in. (mm)	OA Length in. (mm)
Phillips Insert Bits				
PH2IP	Phillips Insert Bit	#2	1/4 (6)	1 (25)
PH3IP	Phillips Insert Bit	#3	1/4 (6)	1 (25)
Phillips Power Bits				
PH2XIP	Phillips Power Bit	#2	1/4 (6)	2 (51)
PH3XIP	Phillips Power Bit	#3	1/4 (6)	2 (51)

Catalog Number	Description	Point Size	HEX Insert in. (mm)	Overall Length in. (mm)
Star Insert Bits				
TX10IP	Star Insert Bit	T10	1/4 (6)	1 (25)
TX15IP	Star Insert Bit	T15	1/4 (6)	1 (25)
TX20IP	Star Insert Bit	T20	1/4 (6)	1 (25)
TX25IP	Star Insert Bit	T25	1/4 (6)	1 (25)
TX27IP	Star Insert Bit	T27	1/4 (6)	1 (25)
TX30IP	Star Insert Bit	T30	1/4 (6)	1 (25)


Catalog Number	Description	Color Coded	Hex Opening in.	HEX Insert in. (mm)	Reaction	Nose Diameter in. (mm)	Overall Length in. (mm)
Short Magnetic Hex Drivers							
MSH14I	Short Magnetic Hex Driver	Red	1/4	1/4 (6)	Magnetic	7/16 (11)	2 (51)
MSH516I	Short Magnetic Hex Driver	Yellow	5/16	1/4 (6)	Magnetic	1/2 (13)	2 (51)
MSH38I	Short Magnetic Hex Driver	Blue	3/8	1/4 (6)	Magnetic	9/16 (14)	2 (51)
Long Magnetic Hex Drivers							
MSHL14I	Long Magnetic Hex Driver	Red	1/4	1/4 (6)	Magnetic	7/16 (11)	2-9/16 (65)
MSHL516I	Long Magnetic Hex Driver	Yellow	5/16	1/4 (6)	Magnetic	1/2 (13)	2-9/16 (65)
MSHL38I	Long Magnetic Hex Driver	Blue	3/8	1/4 (6)	Magnetic	9/16 (14)	2-9/16 (65)
MSHL716I	Long Magnetic Hex Driver	Brown	7/16	1/4 (6)	Magnetic	11/16 (18)	2-9/16 (65)
Extra Long Magnetic Hex Drivers							
MSHML14I	Extra Long Magnetic Hex Driver	Red	1/4	1/4 (6)	Magnetic	7/16 (11)	4 (102)
MSHML516I	Extra Long Magnetic Hex Driver	Yellow	5/16	1/4 (6)	Magnetic	1/2 (13)	4 (102)
MSHXL14I	Extra Long Magnetic Hex Driver	Red	1/4	1/4 (6)	Magnetic	7/16 (11)	6 (152)
MSHXL516I	Extra Long Magnetic Hex Driver	Yellow	5/16	1/4 (6)	Magnetic	1/2 (13)	6 (152)
MSHXL38I	Extra Long Magnetic Hex Driver	Blue	3/8	1/4 (6)	Magnetic	9/16 (14)	6 (152)

Catalog Number	Description	Point Size	HEX Insert in. (mm)	Overall Length in. (mm)
Star Power Bits				
TX10XIP	Star Power Bit	T10	1/4 (6)	2 (51)
TX15XIP	Star Power Bit	T15	1/4 (6)	2 (51)
TX20XIP	Star Power Bit	T20	1/4 (6)	2 (51)
TX25XIP	Star Power Bit	T25	1/4 (6)	2 (51)
TX27XIP	Star Power Bit	T27	1/4 (6)	2 (51)
TX30XIP	Star Power Bit	T30	1/4 (6)	2 (51)

Robertson® Square Head Power Bits



Hex Shank Phillips Inserts and Bits

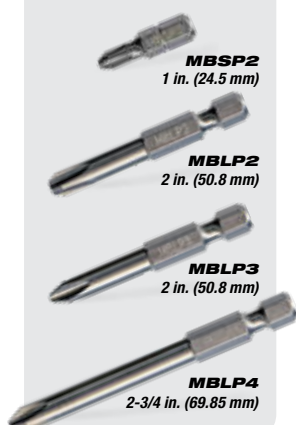

Specifications

Robertson® Style Square Head Hex Bits

- Fully hardened • Square tip will not cam out
- #1 and #2 drivers available in 1-3/4 in. and 2-1/2 in. lengths

Catalog Number	Description	Point Size	Color	Insert Dia. in. (mm)	Overall Length in. (mm)
SD1	Square Head Hex Bit	#1	Green	1/4	1-3/4 (45)
SD2	Square Head Hex Driver	#2	Red	1/4	1-3/4 (45)
SDX1	Square Head Hex Driver	#1	Green	1/4	2-1/2 (63)
SDX2	Square Head Hex Driver	#2	Red	1/4	2-1/2 (63)

1/4 in. Hex Shank Phillips Bits

MBSP2	Hex Shank Phillips Insert Bit	#2	—	1/4	1 (24.5)
MBLP2	Hex Shank Phillips Driver	#3	—	1/4	1-15/16
MBLP3	Hex Shank Phillips Driver	#2	—	1/4	1-15/16 (49.2)
MBLP4	Hex Shank Phillips Driver	#2	—	1/4	2-3/4 (69.9)

IMPACT GRADE QUICK-CHANGE EXTENSION BITS



One-Handed Quick Release!

A Fast and Easy Push-in Style Receiver, with 3 Ball Bearing Detents holds any 1/4 -inch hex shank power groove or insert bit securely. Retract the collar only when removing bit.

Impact Grade Steel Construction

make these durable extensions versatile for use with any Impact Driver or Malco CONNEXT® Handle!

CONNEXT® 3 Ratcheting Handle (See Page 44)



Specifications

Quick-Action Extension Bits

Catalog Number	Description	Hex Opening in.	Shank Dia. in.	Nose Dia. in. (mm)	Overall Length in. (mm)
BHE3	Extension Bit (3 in.)	1/4	1/4	5/8 (15.9)	3 (76.2)
BHE6	Extension Bit (6 in.)	1/4	1/4	5/8 (15.9)	6 (152.4)
BHE10	Extension Bit (10 in.)	1/4	1/4	5/8 (15.9)	10 (254)
BHE12	Extension Bit (12 in.)	1/4	1/4	5/8 (15.9)	12 (304.8)



Do not combine extension bits. Doing so can result in damage to the tool or injury to user.

Magnetic! Bit Holder

1/4-inch hex shank designed for any hex shank insert bit. Extends the length of reach a full 3 inches.



MBH14
3 in. (76.2 mm)

Hex Adapter

Accepts 1/4 in. hex power bits. Installs into chuck of a standard 3/8 in. power drill. Tempered steel. Black finish.



HAD1
1-3/4 in. (44.5 mm)

Specifications

Magnetic Bit Holder

Catalog Number	Description	Hex Opening in.	Shank Dia. in.	Nose Dia. in. (mm)	Overall Length in. (mm)
MBH14	Magnetic Bit Holder	1/4	1/4	7/16 (11.1)	3 (76.2)

Hex Adapter

Catalog Number	Description	Hex Opening in.	Shank Dia. in.	Bore Depth in.	Sleeve Dia. in. (mm)	Overall Length in. (mm)
HAD1	Hex Adapter	1/4	1/4	7/8	7/8	1-3/4 (44.5)

4 in 1 Nut Driver

Quickly change hex sizes.

Malco's exclusive, dual-sided magnetic hex drivers fit over a magnet-tipped, ball locking hex shaft, and can be quickly reversed to change sizes.



Positive Lock

A quick-release, secure positive lock secures telescoping shaft in position and prevents collapsing when forceful in-line pressure is applied during use.




3 Position Combinations

The 4-in-1 Nut Driver is perfect for pocket or pouch, and offers superior performance, ease of use and long service life. The driver shaft can be extended or retracted to produce three different end to end combinations: 1/4 and 5/16 in.; 3/8 and 5/16 in.; and 1/4 and 7/16 in.



Sure Fastener Engagement

Hardened chrome vanadium steel sockets offer sure fastener engagement and control. The comfortable 3-lobe handle is made of high-torque ABS plastic, and a non-slip TPR over-molded grip offers additional comfort and control on the job.



Two Package Types

Available in Single Packs and 12 Pack Box Display!

4IN1

Nut Driver

Catalog Number	Description	Tool Length Hex Sizes	Net Weight in. (mm)	oz. (g)
4IN1	4IN1 Nut Driver	1/4, 5/16, 3/8, 7/16 in.	5-1/4 (133)	7 (199)
4IN1i	4IN1 Nut Driver (Single)	1/4, 5/16, 3/8, 7/16 in.	5-1/4 (133)	7 (199)

4
HEX Sizes

1/4, 5/16, 3/8
& 7/16 in.

4IN1



6 in 1 Reversible Driver

Six different Head Styles with one Tool!

Combination bits change to drive 6 different head styles or sizes. 1/4 & 5/16 in. Hex opening nut driver with 3/16 & 9/32 in. slotted head bit and #1 & #2 Phillips head bit. Shank firmly locks into handle barrel. Driver bits are individual protected with black oxide. Shank is chrome plated to protect against rust.

RD6

Reversible Driver

Catalog Number	Description	Bit Styles	Tool Length in. (mm)
RD6	6IN1 Reversible Driver	1/4 - 5/16, 3/16 - 9/32 in., #1 - #2 Phillips	7 (177.8)



RD6

Components



MINI-BRAKE®

Compact & Portable



MB48A



Make big or small fabrications on the job with this lightweight and portable tool! The versatile Mini Brake produces bends up to 135 degrees in sheet metals, including aluminum, copper and 22-gauge galvanized steel. The brake's compact size can accommodate sheet metal stock up to 4-feet wide, in any length, because there is no fixed throat depth to contend with.



*Suitable for use
anywhere on
the job site!*

Use the Mini Brake anywhere on the job site, even on a truck tailgate, for a variety of fabricating tasks from large HVAC transitions to narrow roof flashing to structures as small as a 4-inch square. Strengthening ribs on the brake's anvil and apron assure consistent bends. A safety conscious, cam-over style clamping mechanism, similar to much larger shop-floor brakes, keeps the anvil secure in any position. Extra wide feet offer stability even when operating on a truck tailgate. *Optional legs are available separately.*



A 5/16 in. (7.9 mm) plate steel apron & adjustable strengthening ribs on anvil assure uniform bends across width of material.

Accommodates sheet metal up to 48 in. (1.2 m) wide in any length. There is no fixed throat depth to contend with.

Versatile bending range accommodates compact fabrications as small as a 4-in. (101.6 mm) square.

The Mini Brake also bends metal roofing components and roof flashing including copper and aluminum.

Dual-direction, cam-over style clamps prevents anvil from free falling or creating a pinching hazard.

MB48A

Portable Mini-Brake

Catalog Number	Description	Minimum Hem Bending Depth in. (mm)	Width ft. (M)	Net Wt. lbs. (kg)
MB48A	Mini-Brake Portable	1/2 (12.7)	4 (1.22)	72 (32.66)
MBL	Mini-Brake Leg Kit	—	—	18 (8.17)

Metal Capacities

Material	Aluminum 18 Ga.	Soft Copper 18 Ga.	Zinc 18 Ga.	55% Al-Zn Mild Steel 22 Ga.	Stainless Steel 24 Ga.	Galvanized Steel 22 Ga.	Mild Steel 22 Ga.
inches (mm)	0.040 (1.02)	0.040 (1.02)	0.040 (1.02)	0.030 (0.76)	0.024 (0.61)	0.034 (0.86)	0.030 (0.76)



MBL

*Optional Leg Kit
(Sold separately).*

Pan Style MINI-BRAKE®

*Perfect for Drip Pans, Register Boxes,
and complex corners for Facia!*



The MB48B "Pan Style" Mini-Brake is designed to fabricate drip pans and register boxes, as well as complex corners for flashing and fascia, on the job. At just under 100 pounds (45 kg), it is carried comfortably by two people, or quickly separated into anvil and table components for one-person transport. The MB48B operates on a workbench, tailgate, or optional legs to produce 135° bends in 22-gauge (0.86 mm) galvanized steel at a maximum 48 inch (1.2 m) width. A 5/16-inch (7.9 mm) plate-steel table apron and anvil frame, with adjustable set-back and strengthening ribs, ensures a uniform bend. Cam-over-center clamps keep the anvil secure in any position for safe operation.




MB48B



Finger Plate Widths:

(5) 2 in., 50.8 mm • (6) 3 in., 76.2 mm • (5) 4 in., 101.6 mm

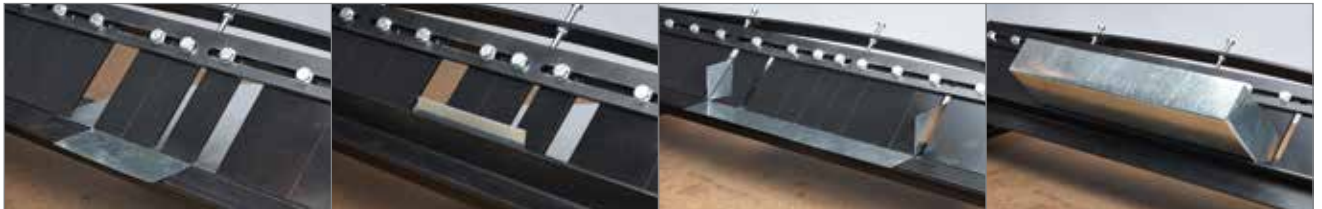

Choose a combination of fingers that will span the bending width as closely as possible.

Adding space between fingers when arranging combinations to accommodate fractional or uneven numbered pan or box side-width dimensions will still produce an accurate bend. The anvil's clearance allows for a range of pan or box side-height dimensions from 1/2 inch (12.7 mm) to a maximum of 3 inches (76.2 mm).

MB48B

Pan Style Mini-Brake

Catalog Number	Description	Bend Angle	Max Bend Width	Min. Bend Width	Max Pan Height	Min. Pan Height	Min. Flange Net Wt.
MB48B	Pan Style Mini-Brake	0 - 135°	48 in. (1.2 m)	2 in. (50.8 mm)	3 in. (76.2 mm)	.5 in. (12.7 mm)	99 lbs. (44.9 kg)
MBL	Mini-Brake Leg Kit	—	—	—	—	—	—

Metal Capacities

Material	Aluminum 18 Ga.	Soft Copper 18 Ga.	Zinc 18 Ga.	55% Al-Zn Mild Steel 22 Ga.	Galvanized Steel 22 Ga.
inches (mm)	0.040 (1.02)	0.040 (1.02)	0.040 (1.02)	0.030 (0.76)	0.034 (0.86)


Replacement Parts

MB48B2	Replacement Finger Plate for MB48B 2-in. (50.8 mm)	—	—	—	—
MB48B3	Replacement Finger Plate for MB48B 3-in. (76.2 mm)	—	—	—	—
MB48B4	Replacement Finger Plate for MB48B 4-in. (101.6 mm)	—	—	—	—



MBL

Optional Leg Kit
(Sold separately).

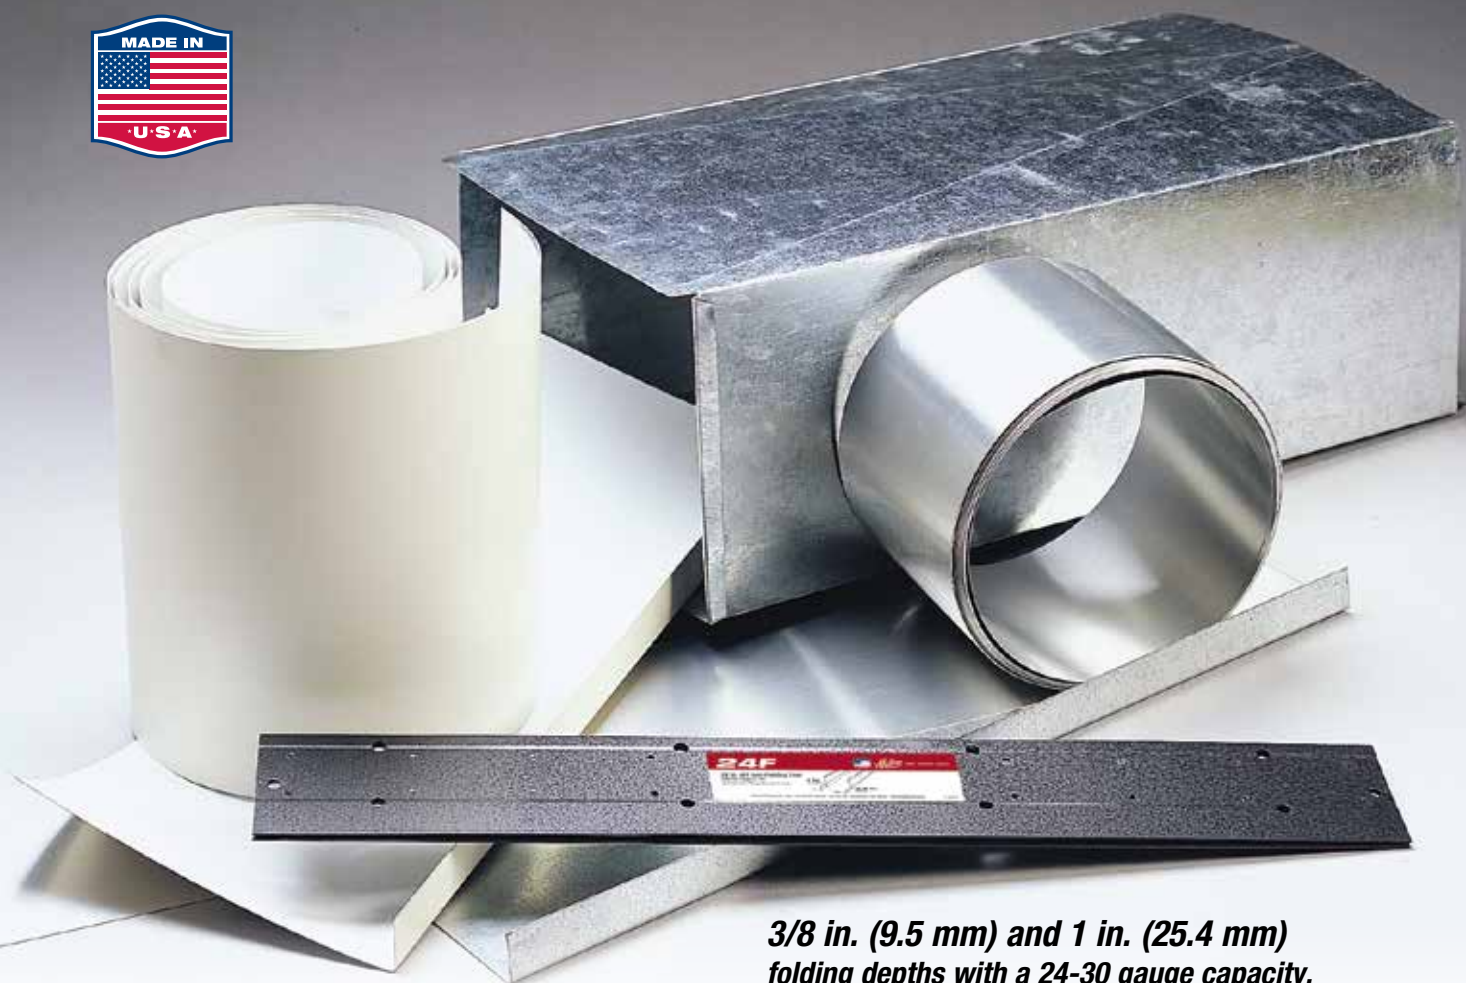

**3/8 in. (9.5 mm) and 1 in. (25.4 mm)
folding depths with a 24-30 gauge capacity.**

**Premium
Sheet Metal
Folding Tools**

Malco's 12F, 18F, and 24F Sheet Metal Folding Tools offer a premium choice for bending and forming metal. Each model is made with superior design and includes handy sight holes to ensure proper depth alignment. Whether you are an HVAC or roofing pro, Malco offers you the right tool to get the job done. Each sheet metal folding tool model can be used for various applications.



12F 12 in. (30.5 mm) Length

The 12F is ideal for HVAC applications such as 3/8 in. (9.5 mm) folds for drive cleats and big 1 in. (25.4 mm) deep folds for joist panning, plenums, register boots, trunk line end caps and more.



18F 18 in. (45.7 mm) Length

Longer 18F - 18 in. (45.7 cm) tool assures a uniform fold.



24F 24 in. (60.1 mm) Length

Extra long 24F - 24 in. (60.1 cm) tool may also be used as a mini brake by siding applicators.

Specifications

Folding Tools

Catalog Number	Description	Folding Depths in. (mm)	Length in. (cm)	Net Wt. oz. (g)
12F	12 in. Folding Tool	3/8 (9.5), 1 (25.4)	12 (30.5)	20 (425)
18F	18 in. Folding Tool	3/8 (9.5), 1 (25.4)	18 (45.7)	31 (879)
24F	24 in. Folding Tool	3/8 (9.5), 1 (25.4)	24 (60.1)	42 (1191)

Metal Capacities

Material	Mild Steel 24 Gauge
inches (mm)	0.024 (0.61)

Did you know?

Malco folding tools are formed from two steel halves, permanently joined together, and handy sight holes assure proper depth alignment.



**Duct Stretchers
for One-Hand drive
cleat installation**

Malco's Duct Stretcher to hold duct in place with one hand while slipping drive cleat in place with the other hand. The low profile, straight body is designed to go anywhere, even in the tightest quarters. Additional spacing holes allow wheels to be adjusted to span greater distances. Rugged anodized aluminum body features large vinyl cushion grip and a handy hang-up hole.

**"Straight"
DS1**


**"Offset"
DS2**



**"Locking"
DS3**

Model DS3 locking duct stretcher pulls duct sections together and holds them in place while freeing both hands to align and install drive cleats.

Greater wheel clearance makes capturing the ends of duct sections, even misshapen flanges, easier than ever. The versatile shape of the DS3 frame also lets you hook and pull duct from above as the drive cleat is coaxied along the remainder of flanged track. The durable all steel frame extends beyond wheel edges, making it safe to push, hammer and bend drive cleats as necessary to complete installation. An offset handle design eliminates knuckle contact with work.



Specifications

Duct Stretchers			
Catalog Number	Description	Length in. (mm)	Net Wt. oz. (g)
DS1	Duct Stretcher	16 (406)	12 (340)
DS2	Offset Duct Stretcher	16 (406)	12 (340)
DS3	Locking Duct Stretcher	12 (305)	30 (851)
Replacement Parts			
DS1C	Replacement wheels, nuts and screws (2 each)		

REDLINE

1/8 - 3/16 in. Hole Punch

The HP18KR Hole Punch does the work of more expensive, bulkier punches faster and easier!

The Malco HP18KR is designed to make holes along the edge of sheet metal and vinyl plastic, including rivet or screw fastener holes in metal ductwork and vinyl window extrusions. The tool is supplied with a 1/8 in. (3.2 mm) punch and die, pre-installed on the tool, as well as a 3/16 in. (4.8 mm) punch and die assembly. A stop gauge permits tool throat depth adjustments from 1/4 to 1-1/8 inches (6.4 to 28.6 mm) for easy hole placement. The tool body consists of a lightweight, die cast aluminum "C" frame head and hardened steel handles and parts stampings with a rust-resistant, nickel plating to ensure long service life.

- **Lightweight and maneuverable.**
- **Easily make holes in sheet metal & vinyl plastic.**
- **Replaceable punch & die installs on the job.**
- **Adjustable throat depth for easy hole placement.**



HP18KR



The tool is supplied with a 1/8 inch (3.2 mm) punch and die, pre-installed on the tool, as well as a 3/16 in. (4.8 mm) punch and die assembly. Punch and die assemblies are also available separately, including Millimeters in 3.6, 4.1 and 6.3 mm.

HP18KR

Hole Punch

Catalog Number	Punch Description	Punch in. (mm)	Variable Leverage Ratio (High / Low) throughout stroke	Punch / Frame	Length in. (mm)	Net Wt. oz. (g)
HP18KR	Hole Punch	1/8 (3.2) & 3/16 (4.8)	6.7 to 1.0 - 8.4 to 1.0	Tool Steel / Alloy Steel	9 (229)	16 (454)

Replacement Punches and Dies		Metal Capacities		
HPD18	1/8 in. Replacement Punch & Die Kit for HP18KR	Material	Galvanized Steel 24 Gauge	Mild Steel 22 Gauge
HPD316	3/16 in. Replacement Punch & Die Kit for HP18KR	inches (mm)	.028 (0.71) up to 2 layers	.024 (0.61) up to 2 layers
Optional Metric Punches and Dies for HP18KR				
HPD36M	3.6 mm Replacement Punch & Die Kit			
HPD41M	4.1 mm Replacement Punch & Die Kit			
HPD63M	6.3 mm Replacement Punch & Die Kit			



HPD316

Easily interchange 1/8 in. (3.2 mm) and 3/16 in. (4.8 mm) punches and dies supplied with tool, right on the job-site!

Duct Holders for Duct and Pipe

Like an extra pair of hands, this job-site duct holder supports sheet metal ductwork in place with clamps and a chain during installation until permanently secured. Temporarily suspending duct or venting from any joist is fast and easy. Double-ended keyhole also allows easy chain adjustment and locking in a horizontal clamping position, required for engineered joists, without the need to tie the chain around the clamp. Formed teeth hold the clamp securely in place on joist.



2DH




2DH

Duct Holder



Catalog Number	Description	Load Capacity lbs. (kg)	Chain Length ft. (m)
2DH	Duct Holder	20 lbs (9 kg) Maximum Work Load	4 (1.22)



CAUTION: 20 lbs (9 kg) Maximum Work Load
For use on residential lumber and / or engineered I-beam construction only.



Holders also open wide and clamp securely for use on engineered wood joists.



Holds duct in place, either between or under joists until properly secured.

◀ Most Popular!

The most popular choice of sheet metal professionals worldwide, the Malco SH3 setting hammer's leather grip permanently conforms to the user's hand for ultimate comfort and ease of use.

SH3
Setting Hammer



Malco's Sheet Metal Hammers are individually hardened and tempered for strength and resiliency. The full-polished heads with beveled face and pein are corrosion resistant, making these tools last longer and work better. The one-piece forged, I-beam construction, make this a durable setting hammer for anyone to use on the job. Available in 12 oz., and 18 oz.



Specifications

Riveting and Setting Hammers

Catalog Number	Description	Head Weight oz. (g)	Head Length in. (mm)	Face Size in. (mm)	O/A Length in. (mm)	Net Weight oz. (g)
SH3	Setting Hammer Leather Grippd	18 (510)	5-1/2 (140)	7/8 (22.2)	11-3/4 (298)	18 (510)
SH3V	Setting Hammer Vinyl Grippd	18 (510)	5-1/2 (140)	7/8 (22.2)	11-3/4 (298)	18 (510)
RH4	Riveting Hammer Leather Grippd	12 (340)	4-7/8 (124)	3/4 (19.1)	11 (279)	12 (340)
RH4V	Riveting Hammer Vinyl Grippd	12 (340)	4-7/8 (124)	3/4 (19.1)	11 (279)	12 (340)
DB1	Dead Blow Hammer	17 (482)	3-1/2 (89)	1-1/4 (32)	11 (279)	16 (454)

Duct Ripper

Catalog Number	Description	Nominal Length in. (mm)	Net Weight oz. (g)
CDR	Duct Ripper	9-1/2 (241)	5 (147)



Perfect companion tool to our TS1 metal cutting TurboShear! (See Page 18)



Pocket Sized Sheet Metal Scribe



A40

Scribe common place trim lines on galvanized sheet metal quickly and accurately. Ten pre-set scribing depths from 1/8 in. to 1 in. (3 to 25 mm). Each scribing depth size features a dual edged point to create clean, readable and accurate score lines parallel to the edge of the metal sheet. Corrosion resistant finish and etched-in dimensions are readable for life of tool.



Adjustable Sheet Metal Scribe



A60

Measure, mark, and scribe trim lines on sheet metal in one easy operation. Set desired trim depth on the 1/8 in. (3.2 mm) graduated scribe extension and tighten knob. The stop at the end of the scribe sleeve glides along edge of work as a 6 x 3/8 in. sheet metal screw point scribes a clean, hard line. Adjustable from 1/4 to 12-1/2 in. (6.4 to 318 mm) depths.



Expandable Trammel Points



TR18

TR42

Two sizes handle a variety of layout applications. The TR42 expands to a big 42 in. (107 cm) radius (84 in. diameter). The compact TR18 expands to 18 in. (46 cm) and stores in most tool boxes. All steel construction. Points are resharpenable and also replaceable. Telescoping arms are nickel plated to resist corrosion. Handle features a comfortable vinyl grip.



Carbide Tipped Scribe



A50

Solid carbide tip for scribing fine lines on hardened steel as well as glass, ceramics, plastics or sheet metal. Retractable tip is easily replaceable. Tool has handy pocket clip. Carbide tip ensures long service.



Fast Adjusting Scribes

Accurate and fast adjusting. Two sizes for circles up to 32 in. (81 cm) and 42 in. (107 cm). Points are easily resharpened or replaced. Nickel plated steel body.




#24

#18



Scratch Awls

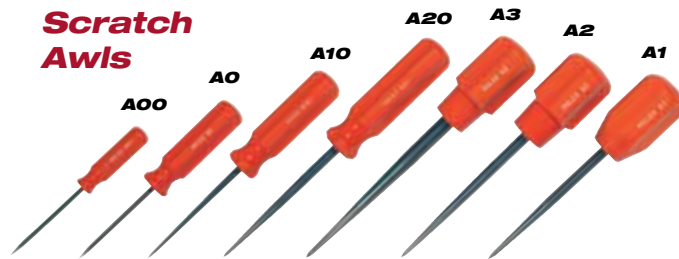

A00

A0

A10

A20

A3

A2

A1



Use to scribe lines on metal, plastic, and a variety of other materials. Pierce holes in wood, plastic, leather - even light gauge metal. Blades are high carbon, alloy tool steel fully polished to resist rust. Blade tapers to a fine point and may be resharpened many times. Easy-to-spot orange handles are shock and shatter resistant.

Specifications

Scribes								
Catalog Number	Description	Radius Min. in. (mm)	Radius Max. in. (mm)	O/A Storage Length in. (cm)	Min. / Max. Adjustments in. (mm)	Length in. (cm)	Net Wt. oz. (g)	Replacement Parts
A40	Scribing Depths in. (mm) 1/8, 3/16, 1/4, 5/16, 3/8, 1/2, 5/8, 3/4, 7/8, 1 (3.2, 4.8, 6.4, 9.5, 12.7, 15.9, 19.1, 22.2, 25.4)	—	—	—	—	—	—	—
A50	Carbide Tip w/ retractable point	—	—	—	—	—	10 (284)	A50R
A60	Adjustable Sheet Metal Scribe	—	—	—	1/4 to 12-1/2 (6.4 to 318)	—	10 (284)	12027
#18	Divider Max. diameter circle 32 (81 cm)	—	—	—	—	11 (28)	7 (199)	RP2 / 10018
#24	Divider Max. diameter circle 42 (107 cm)	—	—	—	—	13-1/2 (34)	9 (255)	RP2 / 10018
Trammel Points								
TR18	Trammel Point 18 in.	7 (18)	18 (46)	12 (31)	—	—	4 (113)	TRP
TR42	Trammel Point 42 in.	12 (30)	42 (107)	24 (61)	—	—	7 (199)	TRP
Scratch Awls								
Catalog Number	Description	Nominal Bladed Diameter in. (mm)	Blade Length in. (mm)	Overall Length in. (mm)				
A00	Regular Grip Handle Scratch Awl	1/8 (3.2)	3 (76)	5-1/2 (140)				
A0	Regular Grip Handle Scratch Awl	1/8 (3.2)	3 (76)	6-1/4 (159)				
A10	Regular Grip Handle Scratch Awl	3/16 (4.8)	3-3/4 (95)	7 (178)				
A20	Regular Grip Handle Scratch Awl	1/4 (6.4)	4 (102)	7-3/4 (197)				
A3	Large Grip Handle Scratch Awl	5/16 (7.9)	5 (127)	7-1/2 (191)				
A2	Large Grip Handle Scratch Awl	1/4 (6.4)	4 (102)	6-1/4 (159)				
A1	Large Grip Handle Scratch Awl	7/32 (5.6)	3-1/2 (89)	5-3/4 (146)				


Dampers

Hardware and Components

**D8HT100****D7HT100****D6HT100****D6100****D4AST**

Malco 28 Gauge Dampers feature 1/4 in. (6.4 mm) bearings allowing bearing holes to be made in round duct with the use of a scratch awl. Squeeze pipe so that it is oval shaped. Insert damper into pre-punched bearing hole(s). Pipe will spring back to round when released. Secure with wing nut(s) provided. Available with or without handles.

Damper Regulator Hardware

**DR69**

Single Bearing / Spring Loaded:
1-spring bearing / 1-inside
washer / 1-handle / 1-wing nut

**DR70**

Double Bearing :
2-spring bearing / 1-inside
washer / 1-handle / 1-wing nut

**DR71**

Double Bearing :
1-spring bearing / 1-fixed tip /
1-inside washer / 1-handle / 1-wing nut

Bulk Components

**WN100**

(100 pack) Wingnuts

**H1100**

(100 pack) Damper
Handles

Single Crimper

**SC1**

Fast, easy to use and lightweight.
Handy lock makes tool pocket sized.
Rust-resistant, zinc plated steel construction
with vinyl cushioned grips.

Did you know?

Popular Redline Crimpers
can be found on page 41.



Specifications

Dampers / Hardware & Components

Catalog Number	Pipe Diameter in. (mm)	Bearing
Standard Dampers, including Wingnuts (Unassembled) 28 Gauge (0.48 mm) 100 packs		
D5100	5 (127)	single
D6100	6 (152)	single
D6HT100	6 (152)	double
D7HT100	7 (178)	double
D8HT100	8 (203)	double
D4AST	4 (102)	single
D5AST	5 (127)	single

Catalog Number	Pipe Diameter in. (mm)	Bearing
Standard Dampers, including Wingnuts (Pre-assembled) 28 Gauge (0.48 mm) 100 packs		
D6AST	6 (152)	single
D7AST	7 (178)	single
D8AST	8 (203)	single
D6HTAST	6 (152)	double
D7HTAST	7 (178)	double
D8HTAST	8 (203)	double

Crimper 1-Blade

Catalog Number	Description	Throat Depth in. (mm)	Jaws	Length in. (mm)	Net Wt. oz. (g)
SC1	1-Blade Crimper	1-1/4 (31.8)	Carbon Steel	8 (203)	8 (227)

Capacities

Material	Aluminum	Copper	Stainless Steel 26 Ga.	Galvanized Steel 24 Ga.	Mild Steel 24 Ga.
inches (mm)	0.035 (0.89)	0.023 (0.58)	0.018 (0.46)	0.028 (0.71)	0.024 (0.61)



CAUTION: Malco Dampers are designed for forced air systems, they are not capable of being used in wood, coal, or other similar systems.



PEX Foam Board Stapler

**For in-floor radiant heating installation.
Magazine Fed Staples with Non-Jamming Design!**

Malco's FBSN Pex Foam Board Stapler is the ideal solution for installing in-floor radiant heating. A light-weight one-piece polymer magazine stands up to any rugged job-site environment. A leaf spring controlled stop automatically adjusts to setup the staples and guide it through the fastening mechanism without risk of jamming or deforming staples. Magazine loading-strips of 25 staples are joined together with a discreet plastic weld that allows staples to separate cleanly as they are engaged by the fastening mechanism.

Exclusive Dual-Barbed foam board staples increase bite and holding power!

FBSN1: 1-1/2 in. (38.1 mm) staples for 1 in. (25.4 mm) foam board, for 3/8 in. (9.5 mm), 1/2 in. (12.7 mm) PEX.

FBSN2: 2-1/2 in. (63.5 mm) staples for 2 in. (50.8 mm) foam board, for 3/8 in. (9.5 mm), 1/2 in. (12.7 mm), 5/8 in. (15.9 mm) PEX.

Did you Know?

Your Foamboard Stapler can be converted for use on PEX to Wood!



PWSK1
Wooden sub-floor kit includes weight cylinder and easy instructions.



FBSN

PEX Foamboard Stapler

Catalog Number	Description	Stapler Size in. (mm)	Staple Size in. (mm)
FBSN	PEX to Foam board Stapler	37 x 11-1/4 x 2-1/2 in. (940 x 286 x 64)	

PEX Staples

FBSN1	1-1/2 in. (38.1 mm) staple for 1 in. (25.4 mm) foam board (200 qty.)	—	1-1/2 (38.1)
FBSN2	2-1/2 in. (63.5 mm) staple for 2 in. (50.8 mm) foam board (200 qty.)	—	2-1/2 (63.5)
FBS1BX	1-1/2 in. (38.1 mm) box of staples for 1 in. (25.4 mm) foam board (300 qty.)	—	1-1/2 (38.1)
FBS2BX	2-1/2 in. (63.5 mm) box of staples for 2 in. (50.8 mm) foam board (300 qty.)	—	2-1/2 (63.5)

PEX to Wood Conversion Weight Kit

Catalog Number	Description
PWSK1	Conversion Kit for Original FBS/FBSN Stapler

Replacement Parts

FBSNS	FBSN / PWS1 wire-form stand *
FBSNW	Magazine Slide Weight **
* Will work with black magazine slide only.	
** Will work with any model, including original FBS	



**Sub-Floor
Staples!**

PEX to Wood Stapler

**For sub-floor radiant heating installation.
Includes Magazine Slide Weight and Retractable Stand!**

The Malco PWS1 Pex Stapler for Wood and Foam Board is the perfect tool for installing in-floor radiant heating. This easy-loading and portable manual stapler includes a magazine feed and operates from a standing position to quickly secure a layout of PEX pipe to a wooden sub-floor or foam board base.

PEX to Wood Staples

PEX to Wood staples feature two .083 x 3/4-in. ring-shank stainless steel nails for superior pull strength in a wooden sub-floor.

PWS2: 1-1/16 in. (27 mm) staples to secure 3/8 in. or 1/2 in. (9.5 or 12.7 mm) PEX layouts to a 3/4 in. (19.1 mm) wooden sub-floor.

PWS1

PEX to Wood Stapler

Catalog Number	Description	Stapler Size in. (mm)	Staple Size in. (mm)
PWS1	PEX to Wood Stapler	37 x 11-1/4 x 2-1/2 in. (940 x 286 x 64)	

PEX to Wood Staples

Catalog Number	Description	Staple Size in. (mm)
PWS2	PEX to Wood Staples (for use in plywood only)	1-1/16 (27)

Replacement Parts

Catalog Number	Description
FBSNW	Magazine Slide Weight



Did you Know?

The PWS1 Pex to Wood Stapler can use Foamboard Staples too!

SmartTool™

with SmartClip™ Fasteners

For Fast, uniform layout of PEX to a wire-grid!

The SmartTool stapler is used to install SmartClip staples that secure an in-floor radiant heating layout of PEX tubing to a wire grid with foam board base. The ergonomic 38-1/2 inch (98 cm) tall SmartTool weighs only 6.1 lbs (2.8 kg) and saves time by operating from a standing position to attach SmartClips to a 10-ga (3.5 mm) wire grid. The installed SmartClips accommodate popular 1/2 inch PEX tubing, which the user also installs from a standing position by pressing into place with one foot while distributing the PEX along the clip layout. The SmartClip keeps the inserted PEX elevated over the wire grid to provide thorough concrete encasement and coverage.



SM1
SmartTool



Easy top-loading.



Stand Comfortably



Secure wire connection



Protective plastic-to-plastic PEX connections.



Uniform layout ensures even radiant heating surface.



SM2
SmartClip



Specifications

SmartTool™								
Catalog Number	Description	Tool Length in. (cm)	Handle Width in. (cm)	Wire Capacity Ga. (mm)	SmartTool Clip Maximum	PEX Capacity in. (mm)	Tool Net Weight lbs. (kg)	Quantity
SM1	SmartTool™	38.5 (98)	21 (53)	—	2 Strips of 20 Clips	—	6.1 (2.78)	1
SmartClip™								
SM2	SmartClip™	—	—	10 (3.5)	—	.5 (12.7)	—	1280



UC1

Accommodates all types
of PEX tubing: 1000 ft.
(305 m) of 3/8 to 1/2 in.
(9.5 to 12.7 mm) 500 ft.
(152 m) of 5/8 to 1 in.
(15.9 to 25.4 mm)

**1000 ft.
Capacity!**
for 1/2 in.
PEX Tubing

PEX Uncoiler

**Organize and dispense PEX Tubing easily
and efficiently for a more uniform layout**

Compact Carrying Case

Organize and dispense PEX tubing easily and efficiently with Malco's PEX Tubing Uncoiler. A heavy-duty turntable supports a full coil of PEX (polyethylene cross-linked tubing). An eyelet loop opens for easy feeding or removal of tubing from the uncoiler unit. The rotating eyelet arm allows tubing to be pulled off in any direction. A Factory-adjusted tension prevents backlash and spreading of tubing coil off the turntable. The PEX Tubing Uncoiler is easy to setup, with no tools required to assemble, and takes up very little space in a truck or van. The entire unit stores in a steel-reinforced plastic case measuring 40 x 17 x 5 in. (102 x 43 x 13 cm). Carrying weight is only 50 lbs. (22.7 kg).

EASY STEP BY STEP ASSEMBLY



UC1

PEX Uncoiler

Catalog Number	Description	Net Wt. lbs. (kg)
UC1	Pex Tubing Uncoiler in Case	50 (22.7)



REDLINE

PEX-to-Wire Tool

The lowest cost per connection for laying out a PEX in-floor radiant heating system on a wire grid.

- Safe to use on all PEX to wire applications and all brands of PEX tubing from 3/8 in. (9 mm) to 5/8 in. (15.9 mm) diameters.
- Easy-loading magazine with 25 clip capacity won't slow you down.
- Trouble-free tool operation and secure clip connection.
- 12-gauge (2.5 mm) clips will not jam, break, or damage PEX.
- Clip connection allows some PEX movement to avoid abrasion.




PT1

EASY STEP BY STEP LOADING



PC1 EV
25 PEX to Wire Clips

PT1					
Pex-to-Wire Tool					
Catalog Number	Description	Clip Usage	Length in. (mm)	Net Wt. oz. (g)	
PT1	PEX to Wire Tool	PC1	10-3/8 (264)	28 (794)	
Pex-to-Wire Clips					
Catalog Number	Crown in. (mm)	Opening in. (mm)	Inside Diameter in. (mm)	Thickness Ga. (mm)	Package Qty.
PC1 EV	1-7/8 (48)	15/16 (25)	15/16 (25)	12 (2.5)	500

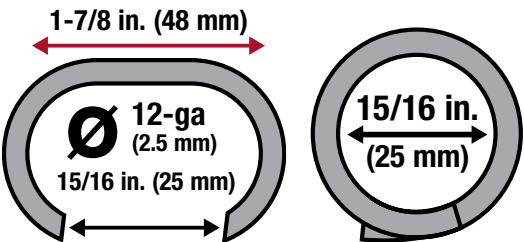

Hard or Soft Copper**TC312****TC274****Rugged Aluminum Alloy Body**

For hard or soft copper tubing. Makes clean, right-angle cuts with no burrs or chips to clog tubing. Features ball bearing feed, flare cut-off groove, retractable reamer and spare cutting wheel. Rugged aluminum alloy body is designed for handling ease.

Ratchet Action**RTC829****RTC623****Self-Feeding Ratchet Motion**

Self feeding ratchet motion for easy cutting in close quarters. Cuts copper, brass and aluminum tubing as well as thin walled conduit.

Conforms to Federal Specification GGG-C771d 1-31-64. Type II, Class 1, Style B.

Conforms to Federal Specification GGG-C771d 1-31-64. Type II, Class 2, Amendment II.

Spring Loaded**STC650****Fast Adjusting with Quick Release**

Fast Adjusting with quick-open release after cutting. Cuts copper, brass and aluminum tubing as well as thin walled conduit.

Tight Spaces

1-1/4 in. Clearance

TC127**1-1/4 in. Clearance for tight spaces**

A handy tube cutter for cramped spaces so often encountered on installations or repairs. Only 1-11/16 x 1-15/16 x 7/8 in. (42.9 x 49.2 x 22.2 mm). Weighs only 2-1/2 oz. (71 g) A mere 1-1/4 in. (31.8 mm) clearance is all that is needed to operate the "Imp".

Double Rollers**TC174****Tubing pivots on double rollers.**

Compact cutter requires only 1-15/16 in. clearance, yet accommodates tubing from 3/8 to 1-1/8 in. (9.5 to 28.6 mm) O.D. (1/4 to 1 in. Nominal). Cuts copper, aluminum or brass, thin wall tubing. Lightweight aluminum alloy body. Spare cutter wheel included with tool.

Sure Grip Tube Slicer**TC400****Ideal for use on PEX Tubing**

Also produces cuts in ABS, PVC, rubber and fabric reinforced hose up to 1-1/4 in. (31.8 mm) O.D. Rigid, durable nylon handle design provides sufficient leverage when cutting so that only moderate hand pressure is required. Stainless steel cutting blade is resharpenable and replaceable.

Specifications**Tube Cutters and Associated Replacement Parts**

Catalog Number	Description	Cutting Outside Diameter in. (mm)	Replacement Part Numbers
RTC623	Medium Ratchet Tube Cutter	1/4 - 7/8 (6.4 - 22.2)	RW274
RTC829	Large Ratchet Tube Cutter	5/16 - 1-1/8 (7.9 - 28.6)	RW274
STC650	Spring Loaded Tube Cutter	1/4 - 2 (6.4 - 50.8)	RW274

Tube Cutters and Associated Replacement Parts

Catalog Number	Description	Tubing Outside Diameter in. (mm)	Replacement Part Numbers
TC127	Tube Cutter	1/8 to 5/8 (3.2 to 15.9)	RW127, 127TCS
TC174	Tube Cutter	3/8 to 1-1/8 (9.5 to 28.6)	274TCS, 75046
TC312	Tube Cutter	1/4 to 1-5/8 (6.4 to 41.3)	274TCS, 75046, RW274
TC274	Tube Cutter	1/8 to 1-1/8 (3.2 to 28.6)	274TCS, 75046, RW274
TC400	Sure Grip Tube Slicer	—	RB400

Replacement Parts

RW127	Cutting Wheel	—	—
127TCS	Cutting Wheel Screw	—	—
RW274	Cutting Wheel	—	—
274TCS	Cutting Wheel Screw	—	—
RB400	Replacement Blade	—	—
75046	Cutting Wheel for Stainless	—	—



Spare Cutting Wheel

RTC623 / RTC829: Spare cutting wheel located on outside of handle.

STC650: Spare cutting wheel located under fold-away ream.

Drip Edge Folding Tools

For quick bends in standing seam metal roofing panels

A fiberglass reinforced nylon handle makes bending maximum 22-ga. (0.76 mm) roofing metal easy, even when working overhead.



Two rib-reinforced steel plates are permanently welded together to create strong folding seams for making 1 inch (25.4 mm) and 1-1/2 inch (38.1 mm) bends.



Specifications

Drip Edge Folding Tools

Catalog Number	Description	Bending Depth in. (mm)	Length in. (cm)	Net Wt. lbs. (kg)
DEFT	24 in. Drip Edge Folding Tool	1.5 (38.1) and 1 (25.4)	24 (61)	3.60 (1.63)
DEFT1	18 in. Drip Edge Folding Tool	1.5 (38.1) and 1 (25.4)	18 (46)	3.24 (1.47)

Seamer & Tongs

Straight or Offset, for the way you work!


The Malco Seamer & Tongs line features generous throat depths and openings to handle a broad range of bending and seaming applications. Durable all-cast-steel construction with heavy-duty pivot point ensures long service life. Comfortable vinyl cushioned grips facilitate easier one-hand operation.



Specifications

Seamer and Tongs

Catalog Number	Description	Throat Depth in. (mm)	Jaw Width in. (mm)	Length in. (mm)	Net Wt. oz. (g)
S10	Seamer & Tongs, Straight	1-1/2 (38)	3.5 (89)	9.25 (235)	46 (1,304)
SG10	Seamer & Tongs, Straight, Gripped Jaws	1-1/2 (38)	3.5 (89)	9.25 (235)	47 (1,332)
S11	Seamer & Tongs, Offset	1-1/2 (38)	3.5 (89)	9.5 (241)	46 (1,304)
SG11	Seamer & Tongs, Offset, Gripped Jaws	1-1/2 (38)	3.5 (89)	9.5 (241)	47 (1,332)

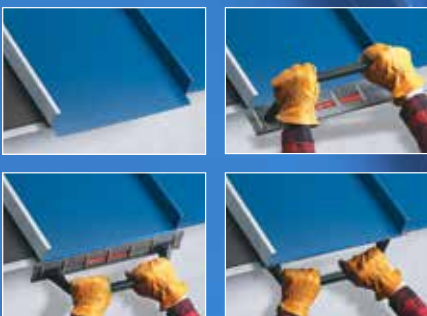


Precision ground jaws with beveled nose make precise 135° bends.



3-Station Edge Roller

Assures a uniform bend along the entire length of material. Quickly adjusts for making 5/8 to 4 in. (15.9 - 102 mm) bends in 29-22 gauge (0.34 - 0.76 mm) steel.

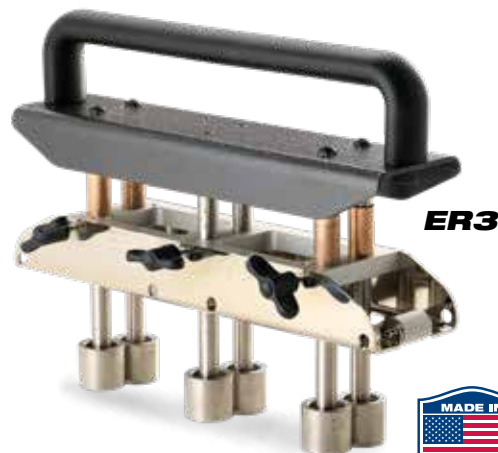

ER3

3-Station Edge Roller

Catalog Number	Description	Bending Depth in. (mm)	Net Wt. lbs. (kg)
ER3	3-Station Edge Roller	5/8 - 4 (15.9-102)	8.5 (3.86)

Capacities

Material	Mild Steel 29-22 Ga.
inches (mm)	.0135-.029 (0.34 - 0.76)



Standing Seam Metal Roofing



Metal Building Panels

Metal Cutting Saw Blade

Cool Clean Cuts in metal roofing & metal building panels



MCCB7

Tough C-6 Carbide Tipped

Tough C-6 carbide tipped blade fits all popular brands of portable circular saws. Lasts up to 30 times longer than abrasive disks for cutting unhardened ferrous metal.

Makes true, flat cuts in standing seam metal roofing and metal building panels without burning paint or protective coatings. Also makes clean cuts in metal studs, light angle iron, and thin walled pipe.



MCCB7

Metal Cutting Saw Blade

Catalog Number	Description	Diameter in. (mm)	RPM	Teeth	Arbor in. (mm)
MCCB7	Metal Cutting Saw Blade	7-1/4 (184)	5800	56	5/8 (16)

Capacities

Material	Mild Steel 16 Ga.
inches (mm)	0.059 (1.52)

SCSRC1



Stone Coated Steel Roofing Cutter 30% Easier!

Makes fast, safe, precise cuts in stone coated steel shingles, shakes and tile style roofing, including DECRA, METRO and GERARD brands up to 30% easier than other guillotines.

Compound leverage and a generous handle length reduce user cutting force up to 30% versus other guillotine style cutters that pose a challenge to even the most seasoned pros. A large table surface allows sure handed control and prevents damage to the work-piece. The table's "feed-thru" design also allows long angle cuts for roof hips and valleys. The steel shingle, including lock seam, is cut in an easy, steady motion. The shearing action has a "wiping" effect on the shingle's zinc coating that seals cut edge to resist rust.



SCSRC1

Stone Coated Steel Roofing Cutter

Catalog Number	Description	Adjustable Table Heights in. (cm)	Net Wt. lbs. (kg)
SCSRC1	Natural Roofing Slate Punch	21.25 - 29.25 (540 - 743)	70 (32)

Replacement Parts


SCSRC1RB	Replacement Blade and Die Set
----------	-------------------------------



Reversible Cutting Edges on hardened steel blade and die offer twice the cutting life, prior to sharpening. Blade and die are also easily replaceable!



After securing the blade lock-pin in place, the SRCSC1 stone coated roofing cutter is safe to carry on to the job site.

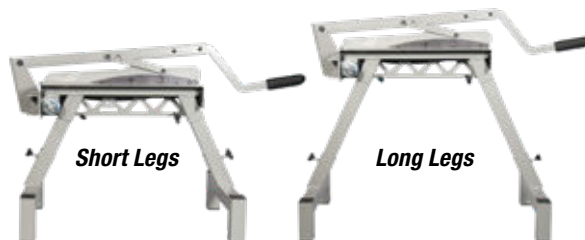

Short Legs

Long Legs

Sturdy frame with two different length leg tubes provides working table height options of 21-1/4 or 29-1/4 inches.

Serrated upper jaw grips backside of slate for controlled non-slip cutting.

REDLINE®

Natural Roofing Slate Cutter

The blade of this precision hand tool accurately navigates edge cuts, cleanly notches out square corners, or cuts circle diameters as tight as 4 inches (102 mm). With the flat, unfinished side of the slate facing up, the tool's serrated, high carbon steel blade securely grips the unfinished surface to make a desirable chiseled cut look from the finished side of 4 - 8 mm natural roofing slate.



NSC1 EV

Natural Roofing Slate Cutter

Catalog Number	Description	Length in. (cm)	Net Wt. oz. (g)
NSC1 EV	Natural Roofing Slate Cutter	8.75 (22)	14 (397)

Capacities

Material	Natural Roofing Slate
Millimeters	4 to 8



Traditional hand cut look.

NSC1 EV

REDLINE®

Natural Roofing Slate Punch

The NSP1 EV slate punch produces a clean, recessed nail hole in 4 - 8 mm natural roofing slate. A big 2-1/2-inch (63 mm) throat depth allows convenient placement of the punch tip on the flat, unfinished side of the slate to create a desirable nail hole recess on the natural finished side as it punches through. Hardened all-steel construction with rust-resistant nickel plate and black oxide finishes ensures long service. The tool steel punch component is also replaceable.



NSP1 EV

Natural Roofing Slate Punch

Catalog Number	Description	Length in. (cm)	Net Wt. oz. (g)
NSP1 EV	Natural Roofing Slate Punch	9.5 (24)	14 (397)

Capacities

Material	Natural Roofing Slate
Millimeters	4 to 8

Replacement Punch

NSP1RP EV	Replacement Punch
-----------	-------------------



NSP1 EV

Makes clean recessed nail holes for secure installation

Gutter Outlet Punch


For cutting downspout drop holes in K-style aluminum gutter, nothing else matches the speed and accuracy of the Malco Gutter Outlet Punch System.

The Malco Gutter Outlet Punch and Dies make clean, accurate hole cuts in .032 in. (0.81 mm) aluminum gutter. Ample throat clearance allows these lightweight outlet punches to work over the front edge of gutter to quickly line up cuts. Convenient fastener holes are provided in the tool frame base for optional bench mount application. An easy ratcheting mechanism and angled punch-blade provide smooth cutting action. High carbon steel blades on punches ensure long service life and are also easily replaceable. Heat treated components and weather resistant finishes provide added tool strength and durability.





- Ejector built into Tool Frame safely removes metal slug from rectangular cuts.
- Punch blades are easily replaceable.
- Extra holes in base of Tool Frame allow for secure bench-mount operation.


A versatile, lightweight Malco Tool Frame accepts your choice of separate Malco rectangular and X-style punch and die combinations, including a 3 x 4 in. (76 x 102 mm) X-style punch and die.



GOP23UK
GOP34UK



GOP23XUK



GOP34XUK



GOT


Gutter Outlet Punch and Dies

Catalog Number	Description	Frame Dimensions in. (cm.)	Net Wt. lbs. (kg)
GOT	Tool Frame	19 x 10 (48 x 25)	6.70 (3.04)
Punch and Die Assemblies			
GOP23UK	2 x 3 in. (51 x 76 mm) Standard Rectangular Hole Punch and Die Assy - Upgrade Kit	—	2.20 (1.00)
GOP34UK	3 x 4 in. (76 x 102 mm) Standard Rectangular Hole Punch and Die Assy - Upgrade Kit	—	2.50 (1.13)
GOP23XUK	2 x 3 in. (51 x 76 mm) X-Style Punch and Die Assy - Upgrade Kit	—	1.90 (0.86)
GOP34XUK	3 x 4 in. (76 x 102 mm) X-Style Punch and Die Assy - Upgrade Kit	—	2.50 (1.13)
Replacement Blocks and Chocks			
GOTRC	Replacement Chocks for (GOT)	—	—
GOPRB	Replacement Blade for (GOP23UK)	—	1.30 (0.60)
GOP23XRB	Replacement Blade for (GOP23XUK)	—	—
GOP34XRB	Replacement Blade for (GOP34XUK)	—	2.34 (1.06)



GOT

U.S. Patent No. 6,289,709

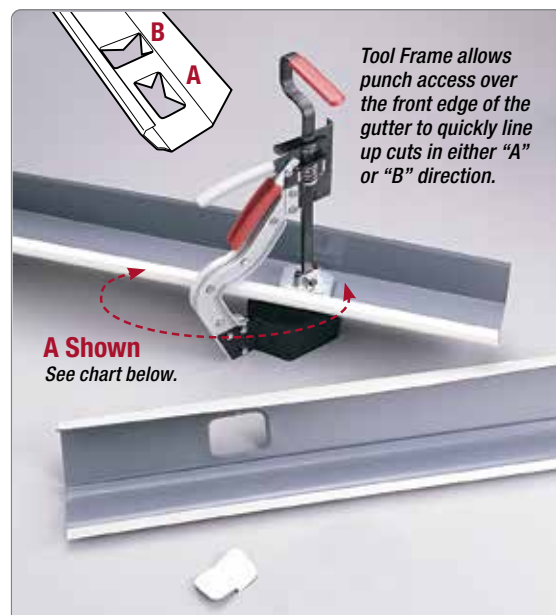

Tool Frame allows punch access over the front edge of the gutter to quickly line up cuts in either "A" or "B" direction.

A Shown
See chart below.

Gutter Size Reference:

Following Gutter Sizes Do Not Fit "B" Direction:

4K Gutter - 2 x 3, 2 x 3 X-Style, 3 x 4, 3 x 4 X-Style

5K Gutter - 3 x 4, 3 x 4 X-Style

6K Gutter - 3 x 4, 3 x 4 X-Style



Gutter Outlet Saws

Make Speedy downspout drop holes in K-style aluminum gutter with the Malco Gutter Outlet Saw system.

Gutter outlet saws with arbor and high speed pilot drill, for downspout that always fits flush to gutter. Choose from five different sizes of fine toothed hole saws for safe, fast, clean cuts in thin walled and half round gutter. Combine with the arbor and high speed pilot drill for increased speed and production on the job-site!

10 High Speed Steel Teeth every 1 in. (25.4 mm)

Combination arbor and high speed pilot drill, with compression spring collar.



GOSA1EV
Arbor and High Speed Pilot Drill



GOS1EV
60 mm (2.375 in.)

GOS2EV
70 mm (2.75 in.)

GOS3EV
78 mm (3 in.)

GOS4EV
90 mm (3.5 in.)

GOS5EV
100 mm (4 in.)

Specifications

Quick-Action Gutter Outlet Saws

Catalog Number	Hole Diameter in. (mm)	Cutting Depth in. (mm)
GOS1EV	2.375 (60)	1 (25.4)
GOS2EV	2.75 (70)	1 (25.4)
GOS3EV	3 (78)	1 (25.4)
GOS4EV	3.5 (90)	1 (25.4)
GOS5EV	4 (100)	1 (25.4)

Combination Arbor & High Speed Pilot Drill

Catalog Number	Pilot Drill Bit	Arbor Shank mm (in.)	Drill Requirements
GOSA1EV	5.9 mm High Speed Steel	10 (13/32)	1/2 in (13 mm) Chuck

Capacities

	Aluminum - 0.43 - 0.81 mm (.017 - .032 in)
	Zinc Coated Aluminum - 0.46 mm (.018 in)
	Galvanized Aluminum - 0.58 mm (.023 in)
	Painted Steel - 0.53 mm (.021 in)
	Copper - 22 oz.

Clean cuts with compression spring ejection!



Specifically designed for use with Malco Gutter Outlet Saws, the universal threaded arbor quickly installs on any size. The pilot drill bit projects only 7/16 in (11 mm) out of the shallow gutter saw cup to ensure controlled, safe engagement of saw teeth.



Gutter Screw Guide


Extra-Long 6-in. Magnetic Screw Guide

This Extra-Long Screw Guide works over the outside edge of rain gutter to hold and guide 1/4 in. hex head screws up to 3-3/4 inches long. An impact grade 6-inch long driver, with a 4-1/2 in. anodized aluminum sleeve, provides easy reach to the mounting surface of eaves without scuffing the outside gutter edge. Fits any drill or 1/4-inch impact driver and features a secure spring loaded magnet.

GSG6

Gutter Screw Guide

Catalog Number	Description	Driver Length in. (mm)	Hex Shank In.	Hex Opening In.	Length Of Sleeve in. (mm)	Weight oz. (g)
GSG6	Gutter Screw Guide	6 (152)	1/4	1/4	4-1/2 (114)	3.60 (102)

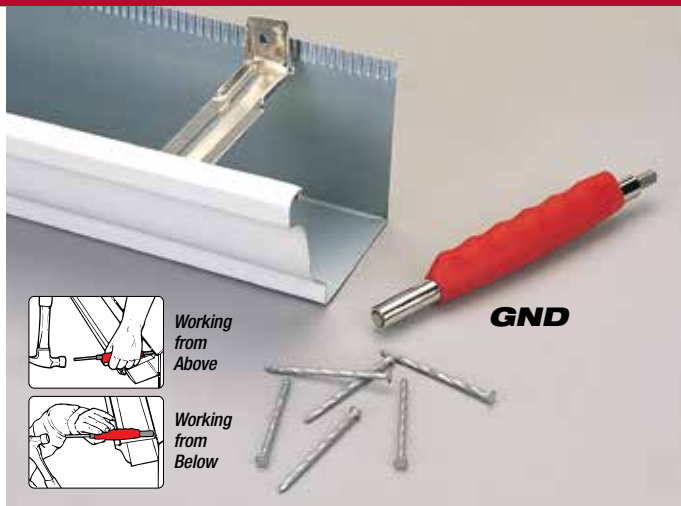

Gutter Nail Driver

Works anywhere to attach gutter to fascia with ease.

Use with hidden hangers and 8D galvanized nails to hang aluminum or steel gutters. A non-slip ergonomic grip provides multiple positions for grasping tool and working. Durable two piece steel construction plus weather resistant zinc and nickel plating assure long service life of this professional quality tool.

GND

Gutter Nail Driver

Catalog Number	Description	Length in. (mm)	Net Wt. oz. (g)
GND	Gutter Nail Driver	7-5/8 (194)	7 (199)

Trim Nail Punches

Drive trim nails into soffit, fascia, and other finishing trim without denting or marring material.

The TNP2S, Heavy Duty Trim Nail Punch features an all-steel nose and aluminum tail piece that directs weight to the working end when grasping or starting a nail. Accommodates up to 1-1/4 in. (31.2 mm) standard trim nails. Nose fits into 1/2 in. (12.7 mm) J-channel.

The TNP2R, Trim Nail Punch with Retaining Clip, offers easier nailing from any angle or height and has an exclusive, "nail retaining clip" feature. Avoid the awkwardness and strain of balancing nails in the nose of the punch or holding back the drive pin while standing on a ladder or reaching out to nail. The new retaining clip also minimizes scrapes and dents caused by nail slippage or improper setting depth.

The TNP3S, Pocket Sized Trim Nail Punch, is constructed of hardened steel and corrosion resistance to ensure longer tool life. The tool will hold and install standard 1-1/4 in. (31.2 mm) trim nails. The small size allows easy access to recesses of formed trim pieces. A hex collar prevents rolling when tool is set down.

Specifications

Trim Nail Punches


Catalog Number	Description	Tool Length in. (mm.)	Net Wt. oz. (g)
TNP2S	Trim Nail Punch	6-3/4 (171)	6 (170)
TNP2R	Trim Nail Punch with Clip	6-3/4 (171)	6 (170)
TNP3S	Trim Nail Punch	5 (127)	2 (57)
TNP3SB	Trim Nail Punch Bulk (24)	—	—
TNP3SH	Trim Nail Punch Bulk (100)	—	—

Replacement Parts


TNP2CL	Replacement Clip for TNP2R
--------	----------------------------



TNP2S

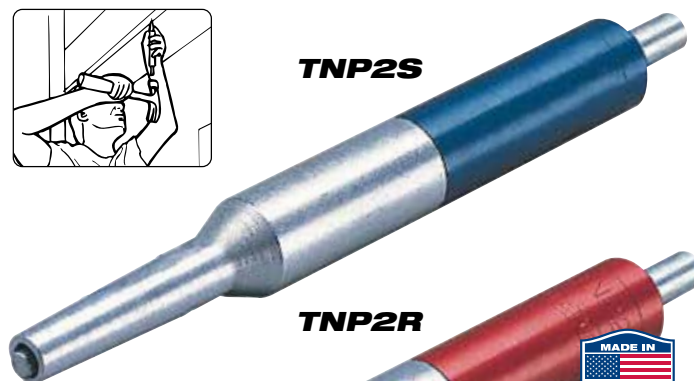

TNP2R

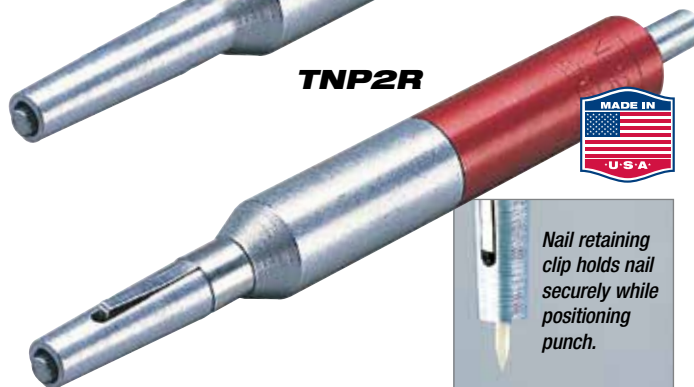

Nail retaining clip holds nail securely while positioning punch.

TNP3S

"Pocket Sized"



**Snap Lock Punch**

Catalog Number	Description	Throat Depth in. (mm)	Jaws	Length in. (mm)	Net Wt. oz. (g)
SL2R	Snap Lock Punch	1/4 to 5/8 (6.4 to 15.9)	Carbon Steel	9 (229)	16 (454)

Metal Capacities

Material	Aluminum	Copper	Stainless Steel 26 Gauge	Galvanized Steel 24 Gauge	Mild Steel 24 Gauge
inches (mm)	0.035 (0.89)	0.023 (0.58)	0.018 (0.46)	0.028 (0.71)	0.024 (0.61)



The Malco model SL2R Adjustable Snap Lock Punch can be used as a gutter end cap crimper or for use in creating locking tabs in light sheet metals. A slide adjustment for throat depth allows settings from 1/4 to 5/8 inch (6 to 16 mm) depth. The formed metal cutting jaws and handles are made of hardened stampings. Rust resistant nickel plate and black oxide finishes ensure long service life. Easy one-hand operation make this a versatile tool for the job at hand.

**5 Blade Crimper**

Catalog Number	Description	Throat Depth in. (mm)	Variable Leverage Ratio (High / Low) throughout stroke	Jaws	Length in. (mm)	Net Wt. oz. (g)
C4R	5 Blade Crimper	1-1/4 (31.8)	7.1 to 1.0 - 9.8 to 1.0	Carbon Steel	9 (229)	16 (454)



If you are looking for a tool that efficiently down-sizes the corners of aluminum or steel downspout, then the Malco 5 Blade Gutter Downspout Crimper is the tool you are looking for. The 5 blade design produces 1-1/4 inch (31.75 mm) long double crimps without causing deformation of downspout walls. A factory-like crimp ensures the downspout walls stay square for a tight fitting, leak-proof connection. A handle closing stop helps to maintain a consistent crimp profile. Made with hardened all-steel construction and a nickel chrome finish, you can be assured this tool will last a long time.

**Single Crimper**

Light duty tool. Makes a single crimp for downsizing aluminum downspouts.

**SC2****1 Blade Crimper**

Catalog Number	Description	Throat Depth in. (mm)	Jaws	Length in. (mm)	Net Wt. oz. (g)
SC2	Single Crimper	1-1/8 (28.6)	Carbon Steel	8 (203)	16 (454)

Blind Rivets

Steel, Aluminum, Stainless, Copper, Painted & Washers

Malco Blind Rivets provide a strong, secure connection between two or more sheets of material, that will not loosen with vibration. Blind rivet fasteners can be used where access is limited to only one side of the material to be fastened. Rivets require only a pre-drilled or pre-punched hole. The blind rivet is an assembly, consisting of a mandrel and an eyelet body. Mandrels are used only to set the rivet body and are then discarded. Mandrel is designed to break off at the crimp after pulling (setting) the rivet body. No operator skill is required to set blind rivets. Low rivet profile offers cosmetic advantages over screws.



Note: Package sizes available in Bults, Tubs (T), and Bags (G).

Painted Rivets



AA42DCC	=	○	Classic Cream
AA42DMB	=	●	Musket Bronze
AA42DRB	=	●	Royal Brown
AA42DW	=	○	White
AA44DMB	=	●	Musket Bronze
AA44DRB	=	●	Royal Brown
AA44DW	=	○	White

Available in 100 piece pegable bags.
See price list for more package sizes.

Shear and Tensile Strengths



Rivet / Mandrel	Rivet Dia.	Minimum Shear	Tensile lbs.
Steel Rivet	1/8 in.	260	310
Steel Mandrel	3/16 in.	540	680
Aluminum Rivet	1/8 in.	120	150
Aluminum Mandrel	3/16 in.	260	320
Stainless Rivet	1/8 in.	420	530
Stainless Mandrel	3/16 in.	950	1200

Copper Rivet Steel Mandrel 1/8 in.

IFI 114 2003 (R2008) Grade 20

* DW= White Painted Rivets (indicated by the ○). See above for more painted rivets.

Specifications

Blind Rivets

Rivet Diameter	Description	Hole Size # / Drill #	Rivet Diameter	Rivet Body Length	Rivet Body Diameter	Rivet Head Width	Rivet Head Thickness	Grip
SS42D	Steel Rivet Plated Steel Mandrel	.125 - .135 / #30	1/8 in.	.232	.125	.25	.032	.063-.125
SS43D	Steel Rivet Plated Steel Mandrel	.125 - .135 / #30	1/8 in.	.294	.125	.25	.032	.126-.187
SS44D	Steel Rivet Plated Steel Mandrel	.125 - .135 / #30	1/8 in.	.357	.125	.25	.032	.188-.250
SS46D	Steel Rivet Plated Steel Mandrel	.125 - .135 / #30	1/8 in.	.481	.125	.25	.032	.313-.375
AA42D	Aluminum Rivet Aluminum Mandrel	.125 - .135 / #30	1/8 in.	.232	.125	.25	.032	.063-.125
AA44D	Aluminum Rivet Aluminum Mandrel	.125 - .135 / #30	1/8 in.	.357	.125	.25	.032	.188-.25
AA42DW *	Aluminum Rivet Aluminum Mandrel (White)	.232 / Drill #30	1/8 in.	.125	.25	.032	.063-.125	—
AA44DW *	Aluminum Rivet Aluminum Mandrel (White)	.125 - .135 / #30	1/8 in.	.125	.25	.032	.188-.250	—
SS/SS42D	Stainless Rivet Stainless Mandrel	.125 - .135 / #30	1/8 in.	.232	.125	.25	.032	.063-.125
SS/SS44D	Stainless Rivet Stainless Mandrel	.125 - .135 / #30	1/8 in.	.357	.125	.25	.032	.188-.25
SS/SS46D	Stainless Rivet Stainless Mandrel	.125 - .135 / #30	1/8 in.	.481	.125	.25	.032	.313-.375
SS/SS48D	Stainless Rivet Stainless Mandrel	.125 - .135 / #30	1/8 in.	.606	.125	.25	.032	.376-.500
CS42D	Copper Rivet Plated Steel Mandrel	.125 - .135 / #30	1/8 in.	.232	.125	.25	.032	.063-.125
CS44D	Copper Rivet Plated Steel Mandrel	.125 - .135 / #30	1/8 in.	.357	.125	.25	.032	.188-.25

2-in-1 Hand Riveter

Malco's 2IN1 Hand Riveter is easy to use with one hand and provides enough pulling power to set all popular rivet sizes. The 2IN1 adjustment features a single long stroke for most hand riveting applications and a short "ratchet action" power stroke for setting larger diameter rivets. The outside "jaw-grip adjustment wheel" opens and closes jaws with fingertip ease to fit any size mandrel and to obtain maximum stroke efficiency. Three nosepieces 1/8, 5/32, and 3/16 in., included with tool. Nose-pieces are stored in handle. Ideal for reaching into corners and recessed areas. Heavy duty all steel construction ensures long life and minimum wear. Polished finish, Nickel-chrome plated. Red vinyl cushion grip and hand stop.



- (1) LONG STROKE: for most riveting applications.
(2) POWER STROKE: "Ratcheting Action" for large diameter rivets.



2IN1

Pulls 1/8 to 3/16 in. blind rivets with steel mandrels.
Pulls 1/8 to 5/32 in. blind rivets with stainless steel mandrels.
(Regularly lubricate with a drop of light oil on points of movement.)



2IN1

2IN1 Premium Hand Riveter

Catalog Number	Description	Capacities in. (mm)	Length in. (mm)	Net Wt. oz. (g)
2IN1	2-IN-1 Hand Riveter	(SEE BELOW)	8 (203)	20 (567)

Replacement Parts

Part Number	Description	Capacities in. (mm)
ER41	Jaws	
ER44	3/16 in. nosepiece	1/8 thru- 3/16 (3.18 - 4.8) steel mandrel
ER45	1/8 in. nosepiece	1/8 thru- 5/32 (3.18 - 4.0) stainless steel mandrel
ER46	5/32 in. nosepiece	
HR37	Adjustment Rod assembly	

Economy Hand Riveter

Lightweight, compact size and slim nose projection allows this riveter to go wherever the work is. Four rivet nosepieces: 3/32, 1/8, 5/32 and 3/16 in. store in handle. Ideally suited for blind riveting applications in aluminum windows, gutter and downspout. Not for use with steel rivets larger than 3.2 mm. Insert rivet into pre-drilled work to be fastened and squeeze handles until mandrel snaps. Release grip on handles and mandrel will drop out front end of tool when tilted. Rugged steel construction with black paint finish and comfortable vinyl grip.



CR18

CR18

Economy Hand Riveter

Catalog Number	Description	Capacities in. (mm)	Length in. (mm)	Net Wt. oz. (g)
CR18	Economy Hand Riveter	3/32 thru 1/8 (2.4 - 3.2) steel rivets	8 (203)	22 (624)

Hand Held Magnetic Sweep



MS12

Comfortable angled handle grip allows easy attraction of nails and metal debris on the work-site. Permanent magnets ensure long service life and resistance to shock and vibration. Magnets are also replaceable. A quick release sleeve allows debris to be easily removed from tool into a bucket.



Powerful magnetic surface easily attracts metal debris.



Quick release sleeve for easy clean-up.



Magnetic!

MS12

Hand Held Magnetic Sweep

Catalog Number	Description	Tool Length in. (cm.)	Net Wt. lbs. (kg)
MS12	Hand Held Magnetic Sweep	34-1/2 (88)	5.0 (2.27)

Replacement Parts

MS12RK	MS12 Magnets
MS12RS	MS12 Replacement Sleeve

Non-Slip Manual Tie Tensioning Flex Duct Tools

Flex Duct Tools Tighten nylon cable ties to fiberglass duct take off connections faster, easier, and with better quality than by hand.



Malco's TY4 and TY4G (Vinyl Gripped) Cable Tie Tensioning Tools feature a manual, easy to operate, cutting mechanism and comfortable gray vinyl cushioned grips. When the tie is tight, a simple pull of the lower handle causes a blade to engage and cut off the excess tail of the nylon tie. A reduced pinch point handle closing ensures peace of mind and reduces injury. Malco Tie Tools are designed to work on standard 175 lb. ties as well as thinner 125 lb. ties.

Adjustable Tie Tensioning Flex Duct Tool

Designed for heavy users of nylon cable ties, that features a desired tension adjustment knob.



Malco's TY6 Tie Tensioning Tool is designed for heavy users of nylon cable ties, and is a more efficient, higher quality alternative to installing flexible duct to take offs. The TY6 features an adjustment knob that allows an installer to set a desired tension for securing flex duct to a take-off collar. When the tie is tight, a breakaway spring mechanism releases the tool's lower handle, which causes a blade to engage and automatically cut off the excess tail of the nylon tie. No extra operation for manual trimming is required. Operating Malco's TY6 Tie Tensioning Tool is also easy on the installer. Contoured handles, with stops, are easier to grasp. Furthermore, the smooth lever action and vinyl cushion grips minimize hand and arm fatigue on big jobs.



Tensioning adjustment knob and automatic cut-off mechanism turn adjustment knob clockwise to increase tension and counter clockwise to decrease tension.
CAUTION: Do not over tighten adjustment knob with fingers. Adjust knob only with fingers to avoid breaking ties before cut-off occurs.



Specifications


Flex Duct Tie Tools			
Catalog Number	Description	Length in. (mm)	Net Wt. oz. (g)
TY6	High Leverage Flex Duct Tie Tool	8-1/2 (216)	15 (425)
TY4	Manual Cut-Off Flex Duct Tie Tool	6 (152)	10 (284)
TY4G	Manual Cut-Off Flex Duct Tie Tool / Gripped	6 (152)	11 (312)

TY4G



TY4

TY4G
Vinyl cushion grips

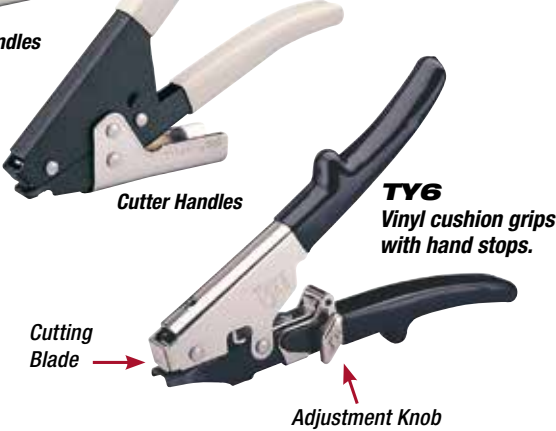

Cutter Handles

TY6
Vinyl cushion grips with hand stops.

Cutting Blade

Adjustment Knob

Secure Choice!

Use Malco adjustable nylon ties to install flexible duct to take-offs, or secure bundles, up to 15 in. (3.81 cm) diameter. Made of 100% nylon, Malco ties offer a minimal tensile strength of 175 pounds.




Flex Duct Support

The Malco FDS1 Flexible Duct Support eliminates air flow restrictions and increases efficiency to dramatically reduce utility bills and improve heated or air-conditioned room comfort. A properly supported 90° duct elbow typically improves air flow efficiency 10 to 40%. A Malco Duct Support quickly installs on new or existing flexible duct. The versatile FDS1 design uses either 36 or 48 inch nylon cable/zip ties to accommodate 4 inch to 16 inch diameters of flexible fiberglass wool duct as well as un-insulated flexible duct. And the strong, but lightweight, 100% recycled polymer support will not weigh down ducting.

FDS1

Flex Duct Support

Catalog Number	Description	(Tie Requirements per Duct Diameter) Duct Diameter	Number of Ties	Nominal Dimensions in. (cm)	Net Wt. oz. (g)
FDS1	Flexible Duct Support	4-10 in. (10.2-25.4 cm) 12-14 in. (30.5-35.6 cm) 16 in. (40.6 cm)	2) 36 in. (91.4 cm) 2) 48 in. (121.9 cm) 4) 36 in. (91.4 cm)	15 x 11-1/4 x 3 (38.1 x 28.6 x 7.6)	3 (85)

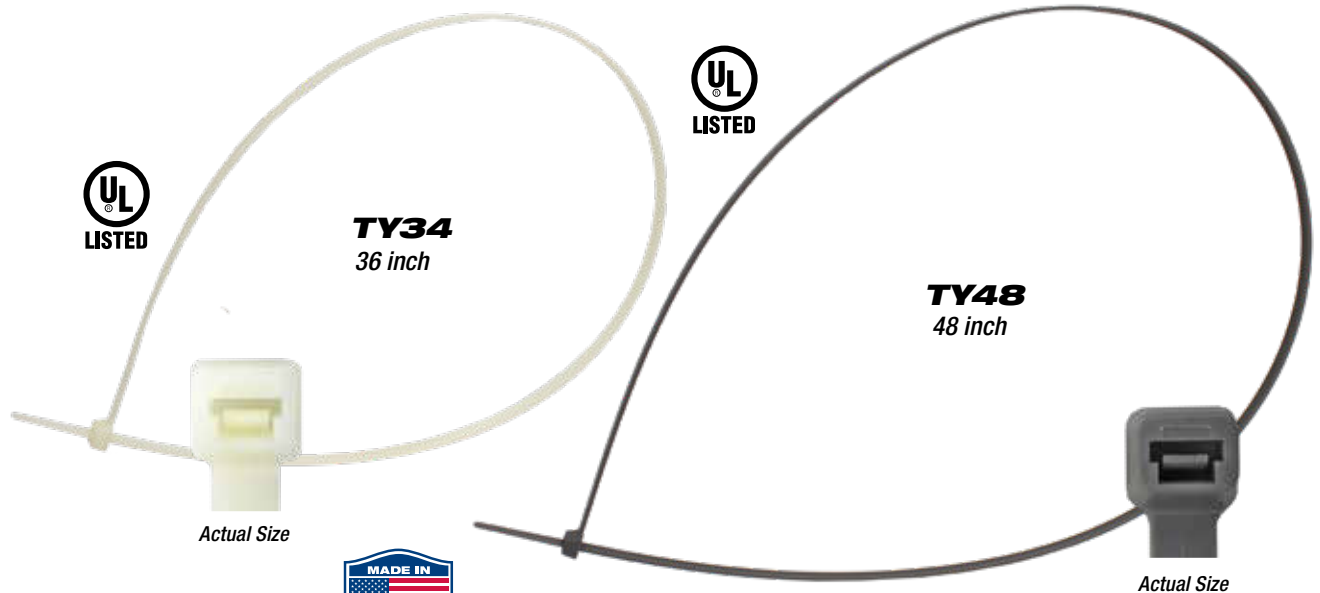

Specifications

Nylon Ties

Catalog Number	TY34	TY48
Overall Length	36 in. (914 mm)	48 in. (1219 mm)
Width	3/8 in. (9.5 mm)	3/8 in. (9.5 mm)
Thickness	3/32 in. (2.29 mm)	3/32 in. (2.29 mm)
Min. Tensile Strength	175 lbs.	175 lbs.
Max. Adjustable Dia.	11 in. (279 mm)	14-1/2 in. (368 mm)
Color	Natural	Gray
For Malco Tie Tools	TY4, TY4G, TY6	TY4, TY4G, TY6

Nylon Ties for Tie Tools

36 & 48 inch Heavy-Duty Nylon Ties

36 and 48 inch Extra Heavy-Duty Ties are rated for indoor use including securing HVAC take-offs, and securing / bundling heavy cables and hoses.



FDC1

Flexible Duct Cutter

Catalog Number	Description	Blades / Wire Cutter	Variable Leverage Ratio (High / Low) throughout stroke	Length of Cut in. (mm)	Length in. (mm)	Net Wt. oz. (g)
FDC1	Flex Duct Cutter	High Carbon Steel	10.4 to 1.0 - 11.9 to 1.0 (Wire Cutter)	4 (102)	11-7/8 (302)	11 (312)



Flexible Duct Cutter



FDC1

Wire Cutter

The Flex Duct Cutter (FDC1) has a built-in wire cutter that lets you finish the job you started with just one tool! A double edged blade cleanly pierces through outer skin and insulation. The fine honed blade, made with long lasting stainless steel, cuts from either direction around the entire circumference of the duct. The built-in wire cutter cuts hardened wire rib coil and features compound leverage for easy wire cutting. The Flex Duct Cutter also includes comfortable, non-slip vinyl gripped handles.



FDC2

Flexible Duct Shear

Catalog Number	Description	Blades / Wire Cutter	Variable Leverage Ratio (High / Low) throughout stroke	Length of Cut in. (mm)	Length in. (mm)	Net Wt. oz. (g)
FDC2	Flex Duct Shear	Heavy-Duty Steel	10.4 to 1.0 - 11.9 to 1.0 (Wire Cutter)	4-3/8 (111)	12-1/4 (311)	13 (369)



Flexible Duct Shear



Thumb operated latch

FDC2

Wire Cutter

The Flex Duct Shear (FDC2) Cuts insulated flexible round duct and also cuts the duct liner's wire rib coil. Pointed bottom blade easily pierces duct to start cut. Heavy duty wire cutter is located away from scissor blades. Thumb operated latch ensures that sharpened blade edges stay closed when not in use.

Trim flex duct and tighten nylon ties with one tool!



FDC3


Multi-Purpose Shear

Catalog Number	Description	Blades / Wire Cutter	Variable Leverage Ratio (High / Low) throughout stroke	Length of Cut in. (mm)	Length in. (mm)	Net Wt. oz. (g)
FDC3	Multi-Purpose Shear	High Carbon Steel	10.4 to 1.0 - 11.9 to 1.0 (Wire Cutter)	4 (102)	11-7/8 (302)	14 (397)

Multi-Purpose Shear



The versatile FDC3 Flex Duct Tool is actually three tools in one! The double-edged knife blade pierces through the flexible round duct and cuts in either direction. A thumb-operated latch opens the tool's compound-leverage handles and the jaws of a built-in wire cutter to easily sever the exposed wire rib coil of duct liner. Use the tool's tie-tensioning mechanism to install a nylon tie strap and secure the flex duct take-off collar. With the handles of the FDC3 in the open position, a nylon tie can be threaded through the mechanism and then tightened by gently pumping the tool's handles.

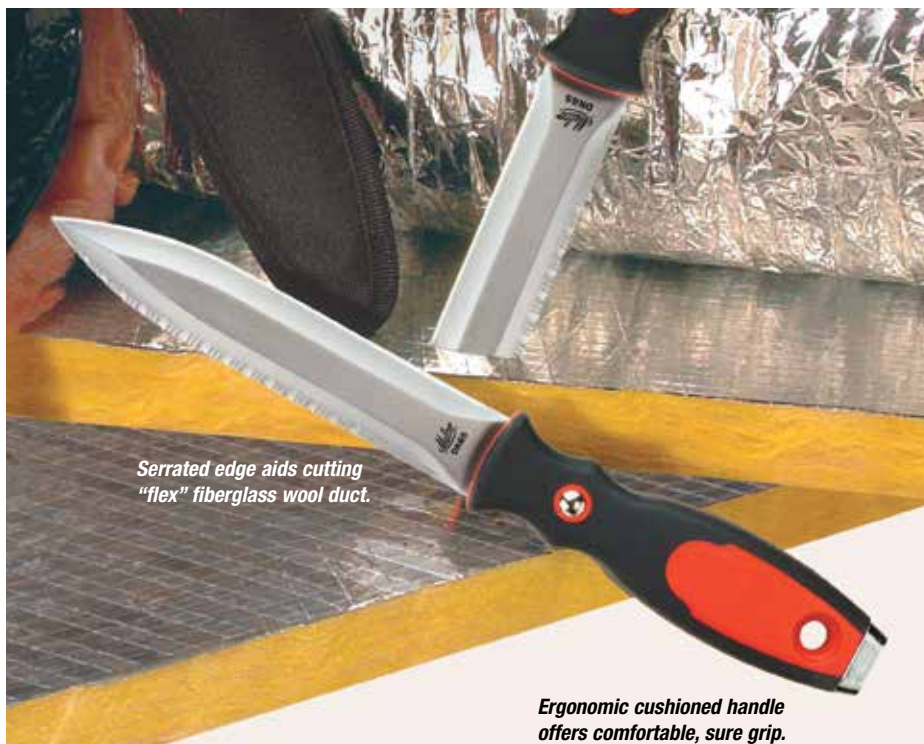

Serrated edge aids cutting "flex" fiberglass wool duct.

Ergonomic cushioned handle offers comfortable, sure grip.

DK6S

Duct Knife for Fiberglass Duct Board

Catalog Number	Description	Blade Length in. (mm)	Length in. (mm)	Net Wt. oz. (g)
DK6S	Duct Knife for Fiberglass Duct Board	6 (152)	—	7 (199)
FDSH	Universal Flex Duct Knife Sheath for ALL FLEX DUCT TOOLS & SHEARS	—	11.5 (292)	2 (57)

Duct Knife and Sheath



DK6S

For cutting flexible fiberglass wool duct and duct board, the DK6S Duct Knife has double edge blades that are ideal for blind cuts in "flex" duct. Ergonomic cushion grip features one serrated cutting edge and comes with a puncture-resistant nylon sheath. Heavy-duty cutlery grade steel blades can be resharpened.

FDSH

Puncture resistant nylon sheath included with DK6S cushion gripped knife.

- 2-3/4 in. (70 mm) wide belt loop.
- Velcro safety strap

Did you Know?

FDSH Duct Knife Sheath is Universal for Malco Duct Tools FDC1, FDC2 and FDC3.



NHP1R

Nail Hole Slot Punch

Catalog Number	Description	Throat Depth in. (mm)	Slot in. (mm)	Length in. (mm)	Net Wt. oz. (g)
NHP1R	Nail Hole Slot Punch	5/8 (15.9)	5/32 x 3/4 (4.0 x 19.1)	8-1/2 (216)	16 (454)



SL8R

Snap Lock Punch (for Vinyl Only)

Catalog Number	Description	Throat Depth in. (mm)	Slot in. (mm)	Length in. (mm)	Net Wt. oz. (g)
SL8R	Snap Lock Punch	1/2 (12.7)	—	8-1/2 (216)	16 (454)



SL5

Snap Lock Punch

Catalog Number	Description	Throat Depth in. (mm)	Slot in. (mm)	Length in. (mm)	Net Wt. oz. (g)
SL5	Snap Lock Punch	3/8 (9.5)	—	9 (229)	12 (340)



REDLINE® Nail Hole Slot Punch

NHP1R



The NHP1R Punch makes a generous 5/32 x 3/4 in. (4.0 x 19.1 mm) horizontal slot for adding or elongating nail holes in vinyl and .019 in. (0.48 mm) aluminum siding to accommodate irregular stud spacing. Constructed of hardened steel stampings and rugged investment cast alloy steel jaws with rust-resistant nickel plate and black oxide finishes to ensure long service life.

REDLINE® Snap Lock Punch

SL8R



Recommended for Vinyl Only.

The SL8R Snap Lock Punch for Vinyl Siding produces wider, more prominent rectangular tab projections for securing vinyl skirting or siding to finishing trim. The raised tabs grip a greater surface area and guard against dislodging due to relaxation of vinyl from heat or blowout during times of high pressure and wind. Constructed of hardened steel stampings and rugged investment cast alloy steel jaws with rust-resistant nickel plate and black oxide finishes to ensure long service life. **Not Recommended for use below 32° F (0° C).**

Snap Lock Punch

SL5

Snap lock plastic skirting and siding to finishing trim.



Snap lock plastic skirting and siding to finishing trim. Makes tabs in the cut edge of siding panel used as a finishing course at top of wall or below window. Tabs lock into utility trim.* *Punch raises a high projection to compensate for natural relaxation of vinyl plastic. It also works well on aluminum siding but is not recommended for steel.*

Note: The SL5 should not be used when PERMATABS are required to snap into finished trim. For this application we recommend using the Malco SL1R or SL2R Snap Lock Punch. PERMATABS is a trademark of C & H Enterprises. **Not Recommended for use below 32° F (0° C).**

REDLINE®**J-Channel Cutters**

Make drain tabs, downstream Notch cutouts and 45-degree miter trim cuts with one tool!



JCCR
5/8 in. (15.9 mm)
J-Channel

**Depth Gauge**

Use graduations on jaw to gauge cutting depths of 3/8 to 1-1/4 in. (9.5 to 31.2 mm)



45° trim cut

J-Channel Cutters are available for 1/2, 5/8 and 3/4 in. (12.7, 15.9 and 19.1 mm) channel.

Use a versatile Malco J-Channel Cutter to make drain tabs, downstream notch cutouts and miter trim cuts in vinyl channel. Available in three sizes for 1/2 inch (12.7 mm) channel, 5/8 inch (15.9 mm) channel and 3/4 inch (19.1 mm) channel. Tool operation is fast and easy! Light hand pressure produces a single handle click signal to ensure perfect drain tabs every time. Graduations on the upper jaw easily gauge tab or notch depths from 3/8 to 1-1/4 in. (9.5 – 31.2 mm). Use either side of the jaws to cut a 45-degree miter for a professional finished look. Hardened all-steel construction with rust resistant nickel chrome and black oxide finishes ensures long service life.



JCCR
5/8 in. (15.9 mm)
J-Channel



JCC50R
1/2 in. (12.7 mm)
J-Channel



JCC75R
3/4 in. (19.1 mm)
J-Channel

**Specifications****J-Channel Cutters**

Catalog Number	Description	Application	Tool Length in. (mm.)	Net Wt. oz. (g)
JCC50R	J-Channel Cutter 1/2 in. (12.7 mm)	J-Channel	8-7/8 (225)	16 (454)
JCCR	J-Channel Cutter 5/8 in. (15.9 mm)	J-Channel	8-7/8 (225)	16 (454)
JCC75R	J-Channel Cutter 3/4 in. (19.1 mm)	J-Channel	8-7/8 (225)	16 (454)

Replacement Parts

5018	Handle Spring: Fits All Redline Handled Tools
------	---



Ultra

Lightweight Snips

The Blade on the ULV10 Ultra Lightweight Vinyl Snip features an extremely sharp knife-like bevel for easy starting and cutting in the thickest, hardest vinyl and other non-ferrous materials or fabrics, including trim coil. The snip has a strong, lightweight 10 in. (254 mm) polymer frame, and weighs less than 9 oz. (249 g). These lightweight Vinyl Snips have protective handle loops and are easy to grasp, while also producing a big 3 in. (76 mm) long controlled cut.

- **Strong, lightweight 10 in. (254 mm) polymer frame**
- **Easy-to-grasp, protective handle loops**
- **Big 3 in. (76 mm) long controlled cut**
- **Designed for all weather conditions**
- **Includes a Full-Size Handle**



Worry Free Blade Changes

A fully threaded brass insert thermally anchored in the blade area of the polymer frame for holding power and no loss of thread integrity.




ULV10

Ultra Lightweight Snip

Catalog Number	Description	Length of Cut in. (mm)	Tool Length in. (cm)	Net Wt. oz. (g)
ULV10	Vinyl Cutting, Combination Snip	3 (76)	10 (254)	9.5 (254)

Replacement Blades

ULV10RB

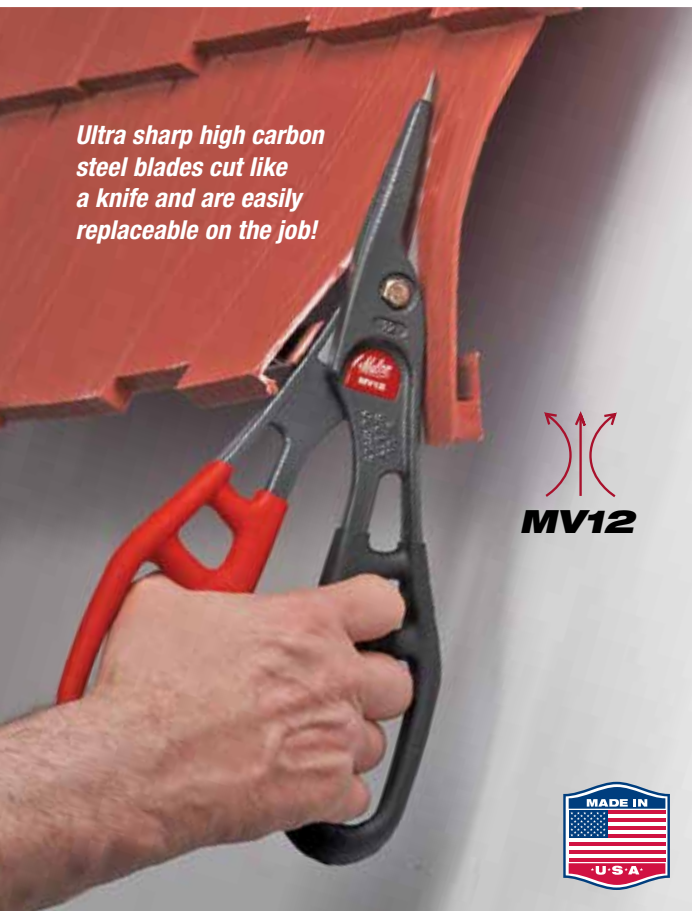

Ultra sharp high carbon steel blades cut like a knife and are easily replaceable on the job!

Vinyl-Cutting

Andy® Snips



Cut through Heavy Vinyl Siding Lock-Seams and more with ease!

The MV12 Aluminum Handled Snip is part of the legendary Andy® SNIP line. This multi-purpose Andy combination snip design features a knife-like cutting edge to produce a smooth slicing action for easy one-hand operation. The user simply grasps the snip with the red grip up for optimal blade alignment when making straight cuts or left or right circular cuts in various non-ferrous materials including: Heavy grade vinyl siding, aluminum trim coil, landscape edging, vinyl flooring, carpeting and leather. Replacement blades are available and are easily installed in the field.



Thick Leather



Aluminum Trim Coil



Landscape Edging

MV12

Ultra Lightweight Snip

Catalog Number	Description	Length of Cut in. (mm)	Tool Length in. (cm)	Net Wt. oz. (g)
MV12	Non-Ferrous Andy Snip	3 (76)	12 (31)	20 (567)

Replacement Blades

MV12RB — Carbon Steel





Save Time!

With a smooth unlocking motion, an easy-to-grasp straight handle and a non-slip textured grip, this handy tool will save you time by cleanly removing vinyl siding!


SRT2
SideSwiper® Siding Removal Tool

Catalog Number	Description	Tool Length. in. (mm.)	Net Wt. oz. (g)
SRT2	SideSwiper II Siding Removal Tool	6-1/4 (159)	3.0 (85)
SRT2B	SideSwiper II Siding Removal Tool Bulk (25)	—	—

SideSwiper® II

Siding Removal Tool for Vinyl Siding


SRT2

The Malco SideSwiper II Vinyl Siding Removal Tool combines the comfort and added leverage of an easy-to-grasp straight handle with the smooth unlocking motion of a burr free hook. The blade of the removal tool is angled from the bottom plane of the handle and allows the user to keep their wrist straight while keeping knuckles well above the work. The surface finishing and plating of the blade ensures the sharply angled hook will not cut into the vinyl material or produce shavings. Additional comfort and control is achieved with a non-slip textured handle grip. The gripping surface will not become slick from moisture, and the form fitting, plastisol dip process, bonds the grip for the life of the tool.

Instructions:

- Insertion:** Wedge tip of blade under overlapping panel and hook onto the back lip of buttlock.
- Unlocking:** Pulling lip downward, slide the tool along length of panel to unlock and expose nail row of panel to be removed.
- Panel Replacement:** Lock and nail replacement panel into place. Use tool to relock overlapping panel. Pull down on panel lip and press it into lock of replacement panel below.

Cross
Section:



Specifications

Vinyl Cutting Circular Saw Blades

Catalog Number	Description	Diameter in. (mm)	RPM	Teeth	Arbor in. (mm)
VCB1	Vinyl Cutting Saw Blade	7-1/4 (184)	6500	186	5/8 (15.875)
VCB2EV	Vinyl Cutting Circular Saw Blade	10 (250)	6500	248	5/8 (15.875)

Vinyl-Cutting Circular Saw Blades

Cut through Vinyl Siding with Ease!



VCB1

Versatile 7-1/4 in. (184 mm) blade for smooth cutting in vinyl fencing / siding and plastic trim.

VCB2EV

Big 10 in. (250 mm) circular blade fits most power miters for making ultra smooth cuts.





Easy One-Person Fiber Cement Siding Installation!



FCFG
Facing Gauge

Overlap Gauges



- Two gauges support entire length of plank and precisely gauge a standard 1-1/4 in. (31.2 mm) overlap, even on a bowed wall.
- Works on 5/16 in. (7.9 mm) fiber cement siding plank.
- Will not mar finish of pre-painted siding.
- Strong, One-Piece tempered spring steel construction.
- Scan the QR Code for a step-by-step video!

Facing Gauge



- Adjustable for precise 5, 6, 7, or 8 in. (127, 152, 178 or 203 mm) exposures. Gauging block easily snaps into desired position without use of tools or fasteners.
- Easy to grasp with one hand while steadying new plank for nailing.
- Manufactured of tough, solid, weather-resistant nylon material.
- May be used with Overlap Gauge for 1-person application.
- Scan the QR Code for a step-by-step video!

Overlap Gauge Instructions:



Place pair of gauges on top edge of lower plank as shown. Rest upper plank against outside face of the gauge stop to accurately space planks and then nail upper plank approximately 18 in. (46 cm) away from gauge.



Depress thumb tab to allow plank to snap flush to wall and gauge.



Remove gauge by depressing thumb tab again and lifting gauge up and off lower plank, then pulling gauge out from under top plank.



Specifications

One-Person Fiber Cement Siding Installation Tools

Catalog Number	Description	Tool Length, in. (mm.)	Net Wt. oz. (g)
FCG2	Fiber Cement Siding Overlap Gauges (pair)	6 (152)	4 (114)
FCFG	Fiber Cement Siding Facing Gauge	10-7/8 (276)	2 (57)
FCMS	Speed Set Gauges	10-7/8 (276)	4 (114)




WARNING:

Fiber cement contains crystalline silica. Respirable silica contained in cutting dust is known to cause cancer.

Speed Set Gauges

Speed Set includes one of each of Malco's FCFG overlap and FCG2 facing gauge for 5/16 in. (7.9 mm) fiber cement siding installation.

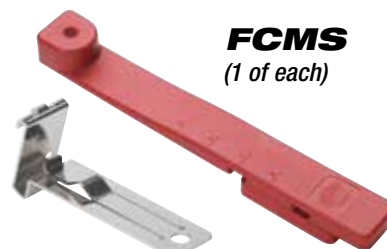



Hidden Nail Cutter

The easiest way to cut hidden nails!



Malco's SNC Nail Cutter cuts hidden nails left over from removal of damaged or unwanted fiber cement siding plank without damaging overlapping plank. The Flat head with a beveled leading edge easily maneuvers under the edge of siding and into corners.


- Saves time and effort when replacing or salvaging siding, thin building materials, and windows.
- Flat head with beveled edges easily maneuvers under edge of material and reaches into corners to cut hidden nails without damaging material.
- Precision-ground, heat treated jaws and compound handle leverage combine to cut up to 16D common nails with a low force requirement.



SNC

Hidden Nail Cutter

Catalog Number	Description	Length in. (mm)	Net Wt. oz. (kg)
SNC	Hidden Nail Cutter	18.5 (47)	28 (.79)

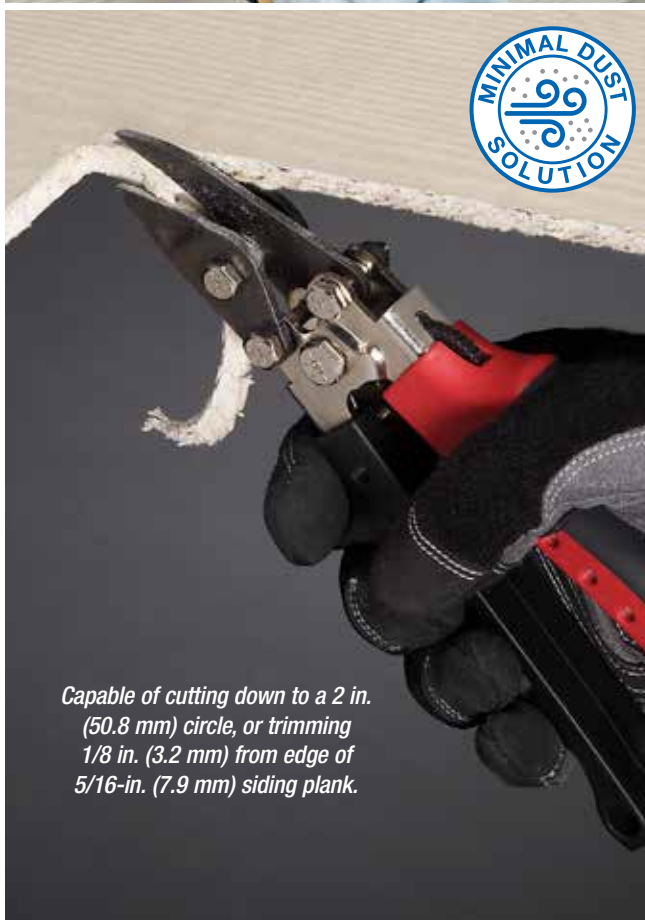

Capable of cutting down to a 2 in. (50.8 mm) circle, or trimming 1/8 in. (3.2 mm) from edge of 5/16-in. (7.9 mm) siding plank.

REDLINE® Fiber Cement Snip



Malco's FCSR Fiber Cement Siding Snip is designed to cut 5/16-inch (7.9 mm) siding plank. The FCSR Snip makes precise arc and trim cuts from any work position fast and easy. Hardened all-steel construction with rust-resistant nickel plating and a black oxide finish ensures long service life.



FCSR

Fiber Cement Siding Snip

Catalog Number	Description	Tool Length. in. (cm)	Net Wt. oz. (g)
FCSR	Fiber Cement Siding Snip	8-1/2 (21.6)	12 (340)

Replacement Spring

5018



WARNING:

Fiber cement contains crystalline silica. Respirable silica contained in cutting dust is known to cause cancer.



Cut straight or angled cuts!

Long-life nickel plated blade design with high leverage handle requires less force to produce clean cuts and minimal air-borne dust.

Straight or Angled Cuts!

Fiber Cement Siding Angle Cutter

Cut multiple angles in fiber cement siding with guillotine precision and minimal dust!

The Malco FCC7 Fiber Cement Siding Angle Cutter cuts multiple angles in Fiber Cement Siding with Guillotine Precision. The nickel plated blade design with a high leverage handle, requires less force to produce clean cuts with minimal air-borne dust. The blade is anchored above the large guillotine plate to allow clearance for cutting angles in 5/16 in. (8 mm) fiber cement planks up to 12 in. (305 mm) wide. The fold out feet on the bottom of the shear act as support extensions for the cutting operation. These legs also allow the FCC7 to be mounted on saw horses for optional workbench-level operation.

Specifications

Fiber Cement Angle Cutter

Catalog Number	Description	Net Wt. oz. (kg)
FCC7	Fiber Cement Angle Cutter	45 (20.4)



WARNING:

Fiber cement contains crystalline silica. Respirable silica contained in cutting dust is known to cause cancer.



FCC7

A 90° fence is included for straight cuts. Loosen knob to swing fence out of the way for angled cuts.

Stable welded frame will survive the most rugged job-site environments.

Fold-out feet act as support extensions.



Large guillotine work plate and open throat allows clearance for cutting any angle in 5/16 in. (8 mm) fiber cement planks up to 12 in. (305 mm) wide.

Fiber Cement Guillotine Shear

For Fast, Straight Cuts in 5/16 in. (8 mm) Fiber Cement Siding, with Minimal Dust!



**Fast
90°
Cuts!**

Malco by **EDMA**

FCC4

Fiber Cement Siding Guillotine

Catalog Number	Description	Net Wt. oz. (kg)
FCC4	Fiber Cement Siding Guillotine	22 (9.98)



WARNING:

Fiber cement contains crystalline silica. Respirable silica contained in cutting dust is known to cause cancer.

The Malco FCC4 Guillotine Shear Cleanly cuts 5/16 in. (8 mm) fiber cement siding without distortion or compression. A large, stable support plate, with board stop, ensures straight, square cuts in 8-1/4 in. (210 mm) wide plank with minimal dust. No sharpening required! The durable, lightweight steel frame and high leverage design offer long service life, easy handling and smooth cutting operation.



**Carbide
Tipped!**



Specifications

Fiber Cement Circular Saw Blades

Catalog Number	Description	Diameter in. (mm)	RPM	Teeth	Arbor in. (mm)
FCCB7	Fiber Cement Circular Saw Blade	7-1/4 (184)	8300	4	5/8 (15.9)
FCCB10	Fiber Cement Circular Saw Blade	10 (254)	5500	6	5/8 (15.9)
FCCB12	Fiber Cement Circular Saw Blade	12 (305)	4700	8	1 (25.4)



WARNING:

Fiber cement contains crystalline silica. Respirable silica contained in cutting dust is known to cause cancer.

Fiber Cement Circular Saw Blades


with Carbide Tips

For repetitive cuts in fiber cement with power miters or portable circular saws, Malco now offers specialized Circular Saw Blades with PCD (PolyCrystalline Diamond) faced carbide tips for longer life. A lower number of teeth and deeper gullets produce cleaner, more precise cuts resulting in an accurately matched trim edge and tighter seams. Perfectly tensioned, hardened tool-steel blade ensures a flat true run.

FCCB7

FCCB10

FCCB12

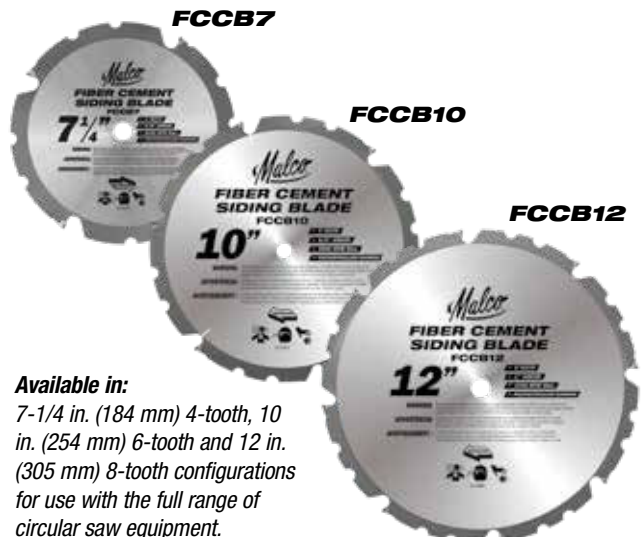

Available in:

7-1/4 in. (184 mm) 4-tooth, 10 in. (254 mm) 6-tooth and 12 in. (305 mm) 8-tooth configurations for use with the full range of circular saw equipment.



**Easy
Ejection!**

Easily cut thick or layered building materials including wood, wall tile, fiberglass, plastic and fiber cement siding including James Hardie®

**19
Sizes!**

QUICK ACTION™

Carbide Tipped Hole Saws and Accessories

**Quick Connect™
Arbor**



HA3

**Quick Change™
Pilot Drills**



HH4

High Speed Steel

HH5

Carbide Tipped

**Quick Release Set™
Arbor and Pilot Drill**
U.S. Pat. No. 9,839,966



HHA5

Carbide Tipped

Specifications

Quick Connect Arbor

Catalog Number	Hex Opening mm	Thread Size in.	Use for Carbide Tipped Hole Saws
HA3	10	5/8 - 18	1-3/8—6-5/16 (35-160)

Quick Change Pilot Drills

Catalog Number	Drill	Hex Shank mm	Overall Length in. (mm)	Drill Chuck in. (mm)	Use with Arbor
HH4	HSS	10	7-3/4 (196)	1/2 (12.7)	HA3
HH5	CT	10	7-3/4 (196)	1/2 (12.7)	HA3

Quick Release Set - Arbor with Pilot Drill

Catalog Number	Drill	Hex Shank mm	Overall Length in. (mm)	Drill Chuck in. (mm)	Use for Carbide Tipped Hole Saws
HHA4	HSS	10	7-3/4 (196)	1/2 (12.7)	1-3/8—6-5/16 (35-160)
HHA5	CT	10	7-3/4 (196)	1/2 (12.7)	1-3/8—6-5/16 (35-160)

Important Note: New Catalog Numbers for Arbor, Pilot Drills, and Quick Release Sets are **not compatible or interchangeable** with any of these discontinued catalog numbers: HA1, HH1, HH2, HHA1, HHA2



WARNING:

Fiber cement contains crystalline silica. Respirable silica contained in cutting dust is known to cause cancer.

Quick Action Carbide Tipped Hole Saws

Catalog Number	Hole Diameter in. (mm)	Cutting Depth in. (mm)	Thread Size
HF1	1-3/8 (35)	2-1/4 (57)	5/8—18
HF2	1-7/8 (48)	2-1/4 (57)	5/8—18
HF3	2 (51)	2-1/4 (57)	5/8—18
HF4	2-3/8 (60)	2-1/4 (57)	5/8—18
HF5	2-1/2 (64)	2-1/4 (57)	5/8—18
HF17	2-9/16 (65)	2-1/4 (57)	5/8—18
HF6	2-3/4 (70)	2-1/4 (57)	5/8—18
HF7	3 (76)	2-1/4 (57)	5/8—18
HF8	3-1/2 (89)	2-1/4 (57)	5/8—18
HF18	3-5/8 (92)	2-1/4 (57)	5/8—18
HF9	4 (102)	2-1/4 (57)	5/8—18
HF10	4-1/8 (105)	2-1/4 (57)	5/8—18
HF11	4-1/2 (114)	2-1/4 (57)	5/8—18
HF19	4-5/8 (117)	2-1/4 (57)	5/8—18
HF12	5 (127)	2-1/4 (57)	5/8—18
HF13	5-1/4 (133)	2-1/4 (57)	5/8—18
HF14	5-1/2 (140)	2-1/4 (57)	5/8—18
HF15	6 (152)	2-1/4 (57)	5/8—18
HF16	6-5/16 (160)	2-1/4 (57)	5/8—18

Word Key: HSS - High Speed Steel CT - Carbide Tipped

Hole in One® HOLE SAW

A hole saw supplied with a dedicated arbor is always the right match, properly assembled and ready to use. BiMetal by Malco concentric construction ensures vibration-free cuts in any machinable metal, including tool steels and stainless. The variable 4/6 pitched tooth configuration milled into a high speed steel edge and micro-welded to a shatterproof alloy steel body easily tackles nail embedded wood. The generous 1-15/16 inch (49.2 mm) cup depth allows cuts in wooden studs, joists and door slabs in one pass.



Bimetal hole saw with supplied arbor easily cuts metal, nail embedded wood, studs, joists and door slabs.



HSB Hole Saw Bit

High speed 1/4 inch (6.4 mm) replacement pilot drill bit fits both original Hole-in-One hole saw with built-in arbor and current 2-piece Hole-in-One with dedicated separate arbor. Generous 3-sided, 1-13/16 inch (30.2 mm) long flats ensure easy positioning of replacement pilot drill bit in the pass-through shank of original welded-on arbor and positive connection with arbor cap screw of either original or current arbor.



Specifications

Hole in One - Hole Saws					Recommended RPM Cutting Speeds				
Catalog Number	Diameter in. (mm)	Cup Depth in. (mm)	Bit Dia. in. (mm)	Teeth	Mild Steel	Stainless Steel	Tool and Cast Iron	Brass	Aluminum
					RECOMMENDED RPM Cutting Speeds				
H30	1-7/8 (47.6)	1-15/16 (49.2)	1/4 (6.4)	Variable Pitched 4/6 per in. (25.4 mm), milled hook*	180	90	120	240	270
H32	2 (50.8)	1-15/16 (49.2)	1/4 (6.4)	Variable Pitched 4/6 per in. (25.4 mm), milled hook*	170	85	115	230	255
H38	2-3/8 (60.3)	1-15/16 (49.2)	1/4 (6.4)	Variable Pitched 4/6 per in. (25.4 mm), milled hook*	140	70	95	190	220
H44	2-3/4 (69.9)	1-15/16 (49.2)	1/4 (6.4)	Variable Pitched 4/6 per in. (25.4 mm), milled hook*	125	60	80	160	185
Pilot Drill Bit									
HSB	1/4 in. (6.4 mm)	Hole Saw Bit - Length: 3-1/2 in. (88.9 mm)			*All BiMetal Hole Saws sizes feature 4/6 variable pitch teeth for aggressive cutting in all machinable materials.				

Vent Saws® are designed for cutting all types of hard and soft wood, and other non-ferrous materials

including plywood, composition board and siding. The Malco Vent Saw is helpful when fitting fresh air intakes through foundation plates, exterior siding or facing materials encountered in residential or light commercial installations of gas or oil fired furnaces. It also features easily replaceable alloy steel blades and a versatile one piece cast aluminum arbor/mandrel combination with a 7/16 in. (11 mm) pilot drill. The webbed mandrel allows easy plug removal and a built-in arbor eliminates the need for separate arbor attachments.



HSX 13 in. (330 mm) Arbor Extension

Specifications

Vent Saws		
Catalog Number	Description	Depth of Cut in. (mm)
HSW68	Vent Saw	2 (50.8)
HSW97	Vent Saw	2 (50.8)
HSRD	Replacement Pilot Drill	—
HSX	13 in. (330 mm) Arbor Extension fits Malco Vent Saw®	—
Replacement Blades		
HSW68	RSW68	—
HSW97	RBW97	—



WARNING:

Fiber cement contains crystalline silica. Respirable silica contained in cutting dust is known to cause cancer.



HSW68

7/16 in. (11.1 mm) pilot drill





Commercial Grade Hog Ring Pliers

The Fastest System for Strong and Secure Hog Ring Installation to chain-link fencing

Designed to address the most stringent regulatory codes, this commercial grade hog ring pliers ensures uninterrupted operation to quickly install rings. Long handles save time and effort with plenty of leverage and reach. The 25-count strips of collated rings can be loaded into the pliers' symmetrical magazine from either direction. A plunger feed automatically sets up each ring. There is no need to manually rotate the magazine out of the way as the pliers' clinching mechanism brings the ring forward of the nose for easy access to tension wire and fence.



**9 ga.
Aluminum**



**9 ga.
Galvanized
Steel**

HRA5

Aluminum Hog Rings, 9-ga. (3.8 mm)
Lightweight for Fast Installation

- Twice as strong as closest alternative.
- 6061-T94 or 5052-H38 alloy
- 25-piece loading strips with no sharp points are safe and easy to load.
- One 500 pack secures 1000 feet (305 m) of tension wire spaced at 24 in. (61 cm) intervals.

HRS5

Galvanized Steel Hog Rings, 9-ga. (3.8 mm)
Strong and Weather Resistant!

- Twice as strong as closest alternative.
- Class 3 coating per ASTM A641
- 25-piece loading strips with no sharp points are safe and easy to load.
- The only collated 9-ga. steel hog rings on the market.
- One 500 pack secures 1000 feet (305 m) of tension wire spaced at 24 in. (61 cm) intervals.

HRP5

Commercial Grade Hog Ring Pliers

Catalog Number	Description	Hog Ring Usage	Length in. (mm)	Weight lbs. (oz.)	For Tools	Material	Qty.	Crown in. (mm)	Opening in. (mm)	Inside Dia. in. (mm)	Thickness Gauge (mm)
HRP5	Hog Ring Pliers w / Mag.	HRA5 / HRS5	20 (50.8)	2.9 (1.32)	—	—	—	—	—	—	—
Steel and Galvanized Hog Ring Staples											
HRS5	Hog Ring Staples				HRP5	Galvanized Steel	500	1-7/16 (37)	5/8 (16)	7/16 (11)	9 (3.8)
HRA5	Hog Ring Staples				HRP5	Aluminum Alloy	500	1-7/16 (37)	5/8 (16)	7/16 (11)	9 (3.8)
HRP5RP	Replacement Plunger / Spring Assembly				HRP5	—	—	—	—	—	—



HRP1

Hog Ring Pliers

Catalog Number	Description	Hog Ring Usage	Length in. (mm)	Net Wt. oz. (g)
HRP1	Hog Ring Pliers	HR1 / HR2	7 (178)	7 (198)

Fence Stapler

- Lightweight with easy spring actuated action
- Comfortable rubber-gripped handle
- Stop guide ensures proper hold on the hog ring
- 2 built-in wire cutters with 11-gauge (3 mm) capacity
- Compatible with HR1 (5/8 in., 16 mm) and HR2 (3/4 in., 20 mm) hog ring staples.

Malco[®] by EDMA



HRP1



HRP2

Hog Ring Pliers with Magazine

Catalog Number	Description	Hog Ring Usage	Length in. (mm)	Net Wt. oz. (g)
HRP2	Hog Ring Pliers with Magazine	HR2	7 (178)	15 (425)

Fence Stapler with Magazine


- 50-staple magazine capacity
- Easy removal of magazine for less storage space
- 2 built-in wire cutters with 11-gauge (3 mm) capacity
- Compatible with HR2 (3/4 in., 20 mm) hog ring staples



HRP2

Malco[®] by EDMA

Hog Ring Diameters and Ga.

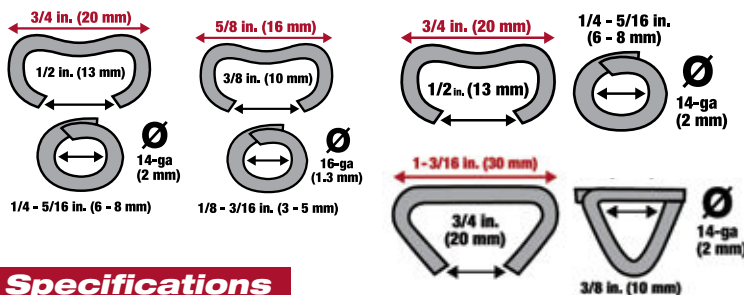

Specifications

Hog Rings and Associated Tools

Catalog Number	Tools	Material	Qty.	Crown in. (mm)	Opening in. (mm)	Inside Dia. in. (mm)	Thickness Gauge (mm)
HR1	HRP1	Galvanized Steel	1250	5/8 (16)	3/8 (10)	1/8-3/16 (3-5)	16 (1.3)
HR1X	HRP1	Galvanized Steel	250	5/8 (16)	3/8 (10)	1/8-3/16 (3-5)	16 (1.3)
HR2	HRP1/HRP2	Galvanized Steel	1000	3/4 (20)	1/2 (13)	1/4-5/16 (6-8)	14 (2)
HR2X	HRP1/HRP2	Galvanized Steel	200	3/4 (20)	1/2 (13)	1/4-5/16 (6-8)	14 (2)
HR4	HRP4	Galvanized Steel	500	1-3/16 (30)	3/4 (20)	3/8 (10)	14 (2)

Fence Stapler with Magazine

- Easy fit screw for fast removal of magazine.
- 50-staple magazine capacity
- Compatible with HR4 (1-3/16 in., 30 mm) hog ring staples



HRP4

Malco[®] by EDMA

HRP4

Hog Ring Pliers with Magazine

Catalog Number	Description	Hog Ring Usage	Length in. (mm)	Net Wt. oz. (g)
HRP4	Hog Ring Pliers with Magazine	HR4	7-3/8 (187)	16 (454)



Fencing Pliers

Malco's fencing pliers are available in a highly maneuverable 8-inch (203 mm) length or a high leverage 10-inch (254 mm) model.

Malco's durable fencing pliers design features three serrated jaw areas for gripping, pulling and tying fence wire. Also, three built-in wire cutter locations ensure easy access for cutting up to 9-gauge (3.8 mm) chain link fence or tensioning wire. A compact, rounded and tapered nose allows easy entry and reach into tight areas. Textured handle surfaces promote safe and sure control. And durable hardened all-steel construction offers long, dependable service life. Malco fence pliers offered in two sizes:

Specifications

Fencing Pliers

Catalog Number	Description	Tool Length in. (mm)	Net Weight oz. (kg)
FP1	8 in. Fencing Pliers	8 (203)	14 (0.40)
FP2	10 in. Fencing Pliers	10 (254)	20 (0.56)



**FCP1****Multi-Purpose Fencing Pliers**

Catalog Number	Description	Tool Length in. (mm)	Net Wt. oz. (g)
FCP1	Multi-Purpose Fencing Pliers	10-5/8 (270)	7 (198)

FCP1**Multi-Purpose Fencing Pliers**

- Combination hammer, wire tensioner, staple remover, wire cutter, and splicer
- Two built in wire cutters
- Hammer face
- Claw to remove staples
- All steel body

Malco by **EDMA**

**FTC1****Hog Ring Pliers**

Catalog Number	Description	Tool Length in. (mm)	Net Wt. oz. (g)
FTC1	Chain-Link Fencing Tensioners	9.5 (241)	16 (450)

FTC1**Chain-Link Fencing Tensioners**

- For easy one-person installation of chain link fencing
- Set of two universal chain link fencing tensioners accommodates T-section or round posts

Malco by **EDMA**

**RRW6****Offset Ratcheting Wrench**

Catalog Number	Description	12 Pt. Hex Sockets	Nominal Length	Net Weight
RRW6	Ratcheting Wrench, Offset	1/2 and 9/16 in.	6.75 in. (172 mm)	5 oz. (142 g)

RRW6**Offset Ratcheting Wrench**

This versatile, compact and lightweight offset ratcheting wrench provides easy fastener access. Finger switches are easily accessible to change ratcheting direction. A 25 degree offset design maintains clearance between fingers and chain-link fabric. The 12-point box heads, at each end of the wrench, grasp standard U.S. 1/2 inch and 9/16 inch hex fasteners from multiple angles. Through-hole socket openings accommodate any fastener length. Designed for long service life, it exceeds ASME minimum torque requirements.



REDLINE®



Vinyl Fence Notchers

Vinyl fence picket and rail notchers are designed specifically for use with vinyl fencing.

Malco VFN1 & VFN2 Vinyl Fence Notching Tools create 1/2 and 3/4 inch (13 and 19 mm) wide and 7/8 inch (22 mm) deep louver-shaped tabs in the end sections of vinyl fence pickets or rails. The resulting raised tabs facilitate a durable lock that prevents the picket or rail from pulling out of the joint opening in a rail or fence post during high winds or abrupt blows. Notcher performance is clean and precise in temperatures from 40 degrees F (-4.4 degrees C) to 120 degrees F (48.9 degrees C).



VFN1

*Picket & Rail Notcher
1/2 in. (13 mm) wide,
7/8 in. (22 mm) deep*

VFN2

*Rail Notcher
3/4 in. (19 mm) wide, 7/8
in. (22 mm) deep*



VFN1

Compound leverage and exclusive RedLine handles reduce the fatigue of repetitive motions.



Quickly lock rails and pickets in place.



VFN2

Easily create raised tabs on the job site.



The louver-shaped tabs create a durable lock that can withstand high winds and abrupt blows.

Specifications

Vinyl Fencing Notchers

Catalog Number	Description	Locking Tab Width in. (mm)	Tool Length in. (mm)	Net Weight oz. (g)
VFN1	Picket and Rail Notcher	1/2 (13)	9 (229)	14 (397)
VFN2	Rail Notcher	3/4 (19)	9 (229)	14 (397)



Works in cold down to 40°F (4.4°C) and heat up to 120°F (48.9°C).



Specifications

Vinyl Cutting Circular Saw Blades

Catalog Number	Description	Diameter in. (mm)	RPM	Teeth	Arbor in. (mm)
VCB1	Vinyl Cutting Saw Blade	7-1/4 (184)	6500	186	5/8 (15.875)
VCB2EV	Vinyl Cutting Circular Saw Blade	10 (250)	6500	248	5/8 (15.875)
VCB3EV	Vinyl Cutting Circular Saw Blade	12 (305)	5800	100	1 (25.4)

Vinyl-Cutting Circular Saw Blades

Cut through Vinyl Fence Posts with Ease!



VCB1

Versatile 7-1/4 in. (184 mm) blade is a must have for portable circular saws.



VCB2EV

10 in. (250 mm) circular blade fits most power miters for making ultra smooth cuts.



VCB3EV

Aggressive cutting 12 in. (305 mm) blade with carbide tipped teeth for easy cuts in fence post.



RUGGED V-JAW

V-shaped jaw creates more points of contact on pipe and round stock for stronger bite and more control.

MT10

10 in. (250 mm)

MT12

12 in. (300 mm)

MT7

8 in. (200 mm)

MT6

6-1/2 in. (165 mm)
STRAIGHT JAW

Specifications

Multi-Track Pliers

Catalog Number	Description	Overall Length in. (mm)	Jaw Type	Jaw Length in. (mm)	Jaw Capacity in. (mm)	Jaw Adjustments	Handle Span	Net Weight oz. (g)
MT6	Multi-Track Plier	6-1/2 (165)	Straight	13/16 (20.5)	7/8 (22)	5	1-11/16 (43)	6 (170)
MT7	Multi-Track Plier	8 (200)	Straight	1-1/8 (28.5)	1-1/2 (38)	4	1-9/16 (40)	13 (358)
MT10	Multi-Track Plier	10 (250)	V-Jaw	1-3/8 (35)	2 (51)	7	1-3/16 (56)	15 (431)
MT12	Multi-Track Plier	12 (300)	V-Jaw	1-1/2 (38)	2-1/4 (57)	7	1-11/16 (43)	29 (807)

Multi-Track Pliers

Multiple slip joint pliers are ideal for use on conduit, pipe, and cable connections.

Compact 6-1/2 inch (165 mm) and 8 inch (200 mm) Straight Jaw Models are ideal for gripping square or hex fasteners plus small diameter pipe, conduit and cable connections. Rugged 10 inch (250 mm) and 12 inch (300 mm) V-Jaw Models create more points of contact on pipe and round stock for stronger bite and more control. All Malco Multi-Track Pliers feature an Undercut Tongue and Groove Adjustment mechanism that will not slip! Jaws are held securely in selected open position and a Reinforcing Ribbed Edge minimizes stress breakage. Plus, a PermaLock® Pivot Fastener eliminates nut & bolt failure. Performance features include Heat Treated Right-Angle Teeth that grip better and last longer. And Thin Design, Tempered Steel Halves allow access in confined spaces where other pliers & wrenches won't go. Ergonomic design considerations feature No Pinch Point. The lower jaw and reinforcing rib prevent handles from ever touching during operation. Long, Vinyl-Cushioned Handles give powerful leverage with a gentle spread for easy one-hand operation.





Wood, Metal, Plaster & General Purpose

Reciprocating Saw Blades with BiMetal by Malco®

Reciprocating Saw Blades with BiMetal stack up better! For wood with nails, metal pipe, angles, and a variety of specialty applications from drywall to drain pipe, BiMetal by Malco stacks up best against the rest. These shatter proof blades are formulated from a premium metal composition consisting of a high speed steel cutting edge micro welded to a flexible high carbon steel back. Wood cutting BiMetal blades are available in a wide variety of profiles and tooth combinations to match cutting speed, plus control and maneuverability needed for the job.

Specifications: Wood Cutting and Plaster

Catalog Number	Nominal L x W x Thickness in. (mm)	Teeth per in. (25.4 mm)	Tooth Set	Tooth Form	Cutting Edge	Description / Application
WOOD CUTTING BiMetal By Malco™						
 4DL6	6 x 5/8 x .050 (152 x 15.9 x 1.27)	6	Alternate	Standard	Milled	DELUXE CONTOUR 4DL6 used for rough-in, contours in wood with nails.
 4KH6	6 x 3/4 x .059 (152 x 19.1 x 1.50)	5/7	Alternate	Variable / Standard	Milled	KEYHOLE PROFILE -- VARIABLE PITCH Varied tooth sizes permit an overall coarser pitch for aggressive cutting in wood with nails. 
 8KH7	9 x 3/4 x .049 (229 x 19.1 x 1.24)	5/7	Alternate	Variable / Standard	Milled	
 12KH8	12 x 3/4 x .049 (305 x 19.1 x 1.24)	5/7	Alternate	Variable / Standard	Milled	
 4KH8	6 x 3/4 x .049 (152 x 19.1 x 1.24)	8	Alternate	Standard	Milled	KEYHOLE PROFILE 4KH8 produces less vibration, smoother, cleaner cuts in wood with nails, composition board.
 4GT7	6 x 5/8 x .031 (152 x 15.9 x 0.79)	6	Alternate	Standard	Milled	STRAIGHT PROFILE 4GT7 used for smooth cutting in hard and soft wood, composition board.
WOOD CUTTING (High Carbon Steel)						
 4S6	6 x 5/8 x .050 (152 x 15.9 x 1.27)	6	Alternate	Standard	Milled	SUPREME CONTOUR - FLEAM SHARPENED  Teeth are fleam sharpened (alternate ground set) for fast feeding, clean shearing action. 4S6 is fastest cutting blade for rough-in, contours in nail free wood. 4S8 used for rough-in, contours in wood with nails. * Blades available in standard 5 packs except where noted.
 4S8	6 x 5/8 x .050 (152 x 15.9 x 1.27)	8	Alternate	Standard	Milled	
 4KH7	6 x 3/4 x .049 (152 x 19.1 x 1.24)	6	Alternate	Standard	Ground	KEYHOLE PROFILE - FLEAM SHARPENED  Teeth are fleam sharpened (alternate ground set) for fast feeding, clean shearing action. 4KH7 used for rough-in, mild contours in nail free wood.
 12KH7	12 x 3/4 x .049 (305 x 19.1 x 1.24)	6	Alternate	Standard	Ground	KEYHOLE PROFILE 12KH7 used for rough-in, mild contours in nail free wood.
 8PWB	8 x 3/4 x .050 (203 x 19.1 x 1.27)	Progr.	Alternate	Vari / Progr	Ground	PLUNGE CUT TIP - PROGRESSIVE PITCH Smaller teeth near blade shank and larger teeth at tip for faster cuts / longer life. 8PWB is a High Carbon Steel, PROGRESSIVE PITCH blade used for making fast, clean cuts in wood and composite material.
PLASTER BiMetal By Malco™						
 4P6	6 x 3/4 x .049 (152 x 19.1 x 1.24)	6	Alternate	"V"	Milled	STRAIGHT PROFILE - "V" TOOTH 60° angle "V" tooth cuts on both forward and backward stroke. 4P6 used for continuous cutting in plaster, sheetrock and metal lath.




Select the Right Blades for the job!

Selecting the right blade for the job is critically important. Factors that should be considered are:

1. Type and hardness of material to be cut, which will determine the tooth form, thickness, and material composition of the blade to be used.
2. Size and variation in cross section of stock to be cut which dictates the pitch of the teeth (or teeth per inch) required, tooth set, and blade length.
3. Type of cut, whether straight, contour, or both, will determine blade width.

Specifications: Metal Cutting and General Purpose

Catalog Number	Nominal L x W x Thickness in. (mm)	Teeth per in. (25.4 mm)	Tooth Set	Tooth Form	Cutting Edge	Description / Application
METAL CUTTING BiMetal By Malco™						
						STRAIGHT PROFILE - HIGH SPEED CUTTING 4TF14 used for metals, including stainless over 1/8 in. (3.2 mm.)
4TF14	6 x 3/4 x .031 (152 x 19.1 x 0.79)	14	Raker	Standard	Milled	
						4TF18 used for 18 gauge (1.22 mm) to 1/8 in. (3.2 mm) metals.
4TF18	6 x 3/4 x .031 (152 x 19.1 x 0.79)	18	Raker	Standard	Milled	
						3MC24, 4MC24 used for metal sheet, pipe, and profiles under 18 gauge (1.22 mm).
3MC24	4 x 3/4 x .031 (102 x 19.1 x 0.79)	24	Wavy	Standard	Milled	
						
4MC24	6 x 3/4 x .031 (152 x 19.1 x 0.79)	24	Wavy	Standard	Milled	
						STRAIGHT PROFILE - VARIABLE PITCH 9MC10 used for pipe diameters to 4 in. (102 mm) O.D. *Note: Do not use to cut waste slack.
9MC10	9 x 3/4 x .050 (229 x 19.1 x 1.27)	10/14	Raker	Var. / Stan.	Milled	
						PLUNGE CUT TIP - PROGRESSIVE PITCH Smaller teeth near blade shank and larger teeth at tip for faster cuts / longer life. 6PMC is a BiMetal, PROGRESSIVE PITCH blade used for making fast, clean cuts in thick or thin material including non-ferrous metals, galvanized sheet metal, copper and steel pipe, and steel and aluminum profiles. This shatterproof blade offers maximum on-the-job performance and long service life.
6PMC	6 x 3/4 x .037 (152 x 19.1 x 0.94)	—	Wavy	Vari / Stan / Progr.	Milled	
METAL CUTTING High Speed Steel						
						STRAIGHT PROFILE - HIGH SPEED CUTTING 4MC14 used for metals over 1/8 in. (3.2 mm) 4MC18 used for 18 gauge (1.22 mm) to 1/8 in. (3.2 mm) metals.
4MC14	6 x 5/8 x .031 (152 x 15.9 x 0.79)	14	Raker	Standard	Milled	
4MC18	6 x 5/8 x .031 (152 x 15.9 x 0.79)	18	Raker	Standard	Milled	
METAL CUTTING HCS (High Carbon Steel)						
						STRAIGHT PROFILE - CARBIDE GRIP CUTTING EDGE 8CG used for soil pipe, cast iron, ceramic tile and brick. *Note: Available as singles only.
8CG*	8 x 3/4 x .040 (203 x 19.1 x 1.02)	—	—	—	Carbide Grit	
GENERAL PURPOSE BiMetal By Malco™						
						STRAIGHT PROFILE 4GT10 used for cuts in wood with nails or metals under 3/16 in. (4.8 mm).
4GT10	6 x 3/4 x .031 (152 x 19.1 x 0.79)	10	Alternate	Standard	Milled	
						PLUNGE CUT TIP - PROGRESSIVE PITCH Smaller teeth near blade shank and larger teeth at tip for faster cuts / longer life. 8PAP is a BiMetal, PROGRESSIVE PITCH blade used for making fast cuts in wood, wood with nails, non-ferrous metals (including aluminum and brass), plastic and fiberglass. This durable blade offers outstanding performance in thick or thin materials.
8PAP	8 x 3/4 x .051 (203 x 19.1 x 1.30)	—	Wavy	Special Progr.	Milled	

Channel Shears

Malco Channel Shears cut through metal studs and runners faster and more economically than any other tool on the market!

Malco Channel Shears complete cuts in one easy stroke without deforming metal channel. Die assembly ensures cutting action is clean and precise. Hollow ground hardened steel blade can be resharpened or replaced. A 36 in. (91 cm) long handle provides additional leverage making cutting with this shear almost effortless. Lightweight and portable enough to be where you want it, when you want it. Shear features rugged all steel and bolt construction. Handle has comfortable red vinyl grips.



SRC24A



SRC24A

features a single installed die assembly with 3 channel sizes for cutting 1-5/8, 2-1/2, and 3-5/8 in. (41, 64, 92 mm) studs and matching runners.



SRC24A1 EV

features an installed die with 3 channel sizes for cutting 50, 70, and 92 mm studs and matching runners and an Extra Die for cutting 45, 64, and 95 mm studs and matching runners.



SRC24A2 SV

features an installed die with 3 channel sizes for cutting 51, 76, and 92 mm studs and matching runners and an Extra Die for cutting 45, 64, and 95 mm studs and matching runners.

Specifications

Channel Shears

Catalog Number	Description	Variable Leverage Ratio (High / Low) throughout stroke	Stud & Runner Size Installed	Stud & Runner Size Included	Height in. (cm)	Length in. (cm)	Depth in. (cm)	Net Wt. lbs. (kg)
SRC24A	Compound Leverage Channel Shear	Shear Action (Punch)	1-5/8, 2-1/2, 3-5/8 in.	—	8 (20)	36 (91)	6 (15)	23 (10.43)
SRC24A1 EV	Compound Leverage Channel Shear	Shear Action (Punch)	50, 70, 92 mm	45, 64, 95 mm	8 (20)	36 (91)	6 (15)	23 (10.43)
SRC24A2 SV	Compound Leverage Channel Shear	Shear Action (Punch)	51, 76, 92 mm	45, 64, 95 mm	8 (20)	36 (91)	6 (15)	23 (10.43)

Capacities

Replacement Blades (All 3 Models)

	Material	Galvanized Steel 20 Gauge	Galvanized Mild 20 Gauge	Replacement Blade (All 3 models)
SRC24A	inches (mm)	0.040 in. (1.02 mm)	0.036 in. (0.91 mm)	10627 Field Replaceable: One replacement blade and two spacers.
SRC24A1 EV	inches (mm)	0.040 in. (1.02 mm)	0.036 in. (0.91 mm)	
SRC24A2 SV	inches (mm)	0.040 in. (1.02 mm)	0.036 in. (0.91 mm)	



Enlarged Crimp Connection

PL1R

Punch Lock / Stud Crimper

Catalog Number	Description	Throat Depth in. (mm)	Net Wt. oz. (g)
PL1R	Punch Lock / Stud Crimper	1-1/2 (38.1)	16 (454)

Replacement Punch and Die

PLD1	Replacement Punch and Die
------	---------------------------



REDLINE® Punch Lock Stud Crimper

PL1R



Secures any width stud and runner without screws or other fasteners. Punch and die are easily replaceable. Maximum capacity 22 gauge stud and runner.

The PL1R Metal Stud Crimper features a unique punch and die shape that creates a rectangular crimp connection by bending over layered thicknesses of channel and stud at one time to form a sturdy bond without the use of fasteners. Lightweight and compact size allows the user to work overhead with ease. The tool body consists of a strong, die-cast aluminum "C" frame head and rust-resistant, nickel plated steel handles and parts stampings. The long-life punch and die are formed from tool steel and are also easily replaced on the job.



Work overhead
and in tight corners!

CGPR

Ceiling Grid Punch

Catalog Number	Description	Punch in. (mm)	Variable Leverage Ratio (High / Low) throughout stroke	Punch / Frame	Length in. (mm)	Net Wt. oz. (g)
CGPR	Ceiling Grid Punch	1/8 (3.2)	6.7 to 1.0 - 8.4 to 1.0	Tool / Alloy Steel	9.5 (241)	16 (454)

Replacement Punch and Die

CGP18	1/8 in. (3.2 mm) Replacement Punch Only (Die is part of frame) for CGPR
-------	---



REDLINE® Ceiling Grid Punch

CGPR



Malco's unique Ceiling Grid Punch makes a clean 1/8 in. (3.2 mm) hole in up to three layers of 25 gauge (0.53 mm) ceiling grid.

Malco's Ceiling Grid Punch makes clean 1/8 inch (3.2 mm) holes in up to three layers of 25 gauge (0.53 mm) ceiling grid. The tool's slim, but strong, "C" shaped steel frame ensures lightweight, one hand operation and allows easy access into tight corners. It is ideal for punching through main tees and perimeter wall angle that is to be secured with blind rivets. A generous throat opening allows full operation from the edge of both standard 1 inch and 1/2 inch (25.4 and 12.7 mm) grid profiles..

Plumbers Roll



AC310
Brown cloth closed coat,
120 grit alum. oxide.

Abrasive cloth specifically designed for cleaning and preparing solder joint fittings

Creates a bite on metal surface for solder or paint. Aluminum oxide cutting grain rates 9.2 on MO scale (diamond=10). Flexible cloth back fits contours of any surface configuration and hard to reach areas. Long lasting urea resin bonding is water resistant.

Fin Straightening Tools



Fin straightening tools with adjustable nylon combs

The FST tool straightens commonplace 8, 10, 12, or 14 fins per inch. Use the FST2 tool for straightening closely spaced 16, 18, 20, or 22 fins per inch. Both tools feature one-piece adjustable combs. The resilient nylon comb material will not damage the soft aluminum fins of condenser or evaporator units.

Specifications

Catalog Number	Description	Tubing O/D in. (mm)
AC310	1-1/2 in. x 10 yd. (38.1 mm x 9.14 m) brown roll	—
AC5M	1-1/2 in. x 5 yd. (38.1 mm x 4.57 m) mesh roll	—
FST	Fin Straightening tool for 8, 10, 12, or 14 fins per inch	—
FST2	Fin Straightening tool for 16, 18, 20, or 22 fins per inch	—

Abrasive Mesh



Actual Size of Weave

180 grit open mesh cleans with both sides,

requires only light pressure, lasts twice as long as cloth. Scrim is nylon weave. Waterproof adhesive bonding. Will not clog, load, or break down.

Heavy-Duty Tote Tray



Perfect for hand tools and fasteners

This heavy duty, crush proof tote tray is great for carrying hand tools and fasteners to the job site. Rust proof polypropylene body material is long wearing, lightweight, and portable. Three roomy compartments to accommodate all the tools you need. Comfortable hand grip rolls to outside will not bite into palm of hand.

Tote Tray			
Catalog Number	Description	Nominal Dimensions (L x W x H)	Net Wt. lbs. (kg)
1660	Tote Tray	15 x 10 x 4-1/2 (38 x 25 x 11)	1.75 (0.79)

Flaring Tool



FT195

Bar Clamp Type Flaring Tool



Flares seven sizes of soft copper, aluminum, and brass tubing. Forged steel slip-on yoke and hardened flaring bar. Yoke design permits flaring where there is little space between nut and tube end. Positive clamping of bars prevents tube slippage. Hard chrome-finished swivel-type cone makes better flares with less effort. Satin finish nickel-chrome plated. *Conforms to federal specification GGG-G-451a, 6-13-68. Type II, Class II, Style A.*

Die Block Type




FT500

For soft copper, aluminum & brass tubing



Faceted, hard chrome finished cone rolls out perfect 45° flares, then automatically burnishes flare face. Handy slip-on yoke permits use in tight quarters. Movable dies allow tubing to be slipped in easily. Heat treated dies grip tubing without scoring and the original tube wall thickness is maintained at base of flare. Satin chrome and black nickel finish.

De-burring Tool

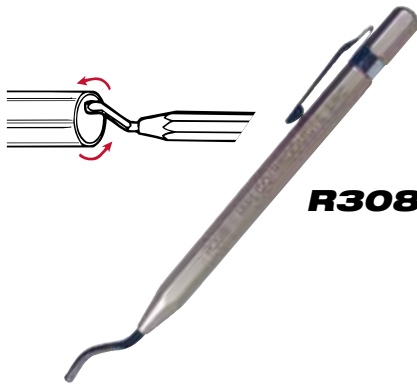

R308

Pocket size, swivel reamer

Pocket size reamer deburrs nominal 1/4 in. (6.4 mm) or larger tubing and fittings. Freely rotating, hardened steel blade holds its edge in both copper and ABS/PVC plastic. Under 6 in. (152 mm) overall length.

Swaging Punch



ST94



Combination swaging punches

Model No. ST94 features three sizes in one tool. (Knurled stock for easy removal of punch.)

Fitting Brushes




For use with copper tubing

Carbon steel crimped fill handle and stem. Available in three different sizes.

Specifications

Catalog Number	Description	Tubing Outside Diameter in. (mm)	Nominal Sizes in.	Diameter in. (mm)	Length in. (mm)	Net Wt. oz. (g)
FT195	Bar Clamp Type Flaring Tool	3/16, 1/4, 5/16, 3/8, 7/16, 1/2, 5/8 (4.8, 6.4, 7.9, 9.5, 11.1, 12.7, 15.9)	1/8, 1/4, 3/8, 1/2	—	—	—
FT500	Die Block Type	3/16, 1/4, 5/16, 3/8, 1/2, 5/8 (4.8, 6.4, 7.9, 9.5, 12.7, 15.9)	1/8, 1/4, 3/8, 1/2	—	—	—
R308	Pocket Size, swivel reamer	—	—	—	—	—
ST94	Combination Swaging Punch	1/2, 5/8, 7/8 (12.7, 15.9, 22.2)	3/8, 1/2, 3/4	—	—	—
FB1/2	Copper Tube Fitting Brush	—	—	1/2 (12.7)	5/8 (15.9)	1 (28)
FB3/4	Copper Tube Fitting Brush	—	—	3/4 (19.1)	7/8 (22.2)	1 (28)
FB1	Copper Tube Fitting Brush	—	—	1 (25.4)	1-1/8 (28.6)	1 (28)

Refrigeration Ratchet Wrenches

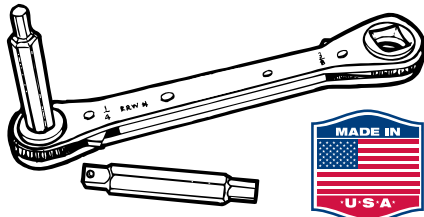

5/16 & 3/16 in.

Hex Key Wrench Inserts

These hex key inserts, with 1/4 inch square shanks, fit any Malco Refrigeration Wrench for easy ratcheting action when servicing hard-to-access valves in ACR condensing units.

* The RRW316C Hex Key Insert has a shorter 3/16 inch hex point which makes the 5/16 inch hex body also accessible as a hex key for many valve applications.



3/16", 1/4" Square

5/16", 3/8" Square



3/16", 1/4" Square

1/2", 9/16" Hex



3/16", 1/4" Square

5/16", 3/8" Square



3/16 in. hex tip with 1/4 in. square shank.
2-3/16 in. O/A length



3/16 in. hex tip with 1/4 in. square shank.
2-3/16 in. O/A length



5/16 in. hex tip with 1/4 in. square shank.
2-1/8 in. O/A length



OFFSET RATCHET WRENCH
SEE PAGE 91

Specifications

Refrigeration Ratchet Wrenches

Catalog Number	Description	Square Shank Diameter in.	Hex Key Diameter in.	O/A Lgth. in.
RRW4	Refrigeration Ratchet Wrench	1/4	1/2 & 9/16	6-7/8
RRW3	Refrigeration Ratchet Wrench	3/16, 1/4, 5/16 & 3/8	—	5-1/2
RRW5	Refrigeration Ratchet Wrench	3/16, 1/4, 5/16 & 3/8	—	5-3/8

5/16 and 3/16 in. Hex Key Wrench Inserts


Catalog Number	Description	Square Shank Diameter in.	Tip Lgth. in.	Hex Key Diameter in.	O/A Lgth. in.
RRW516	Hex Key Ratchet Wrench Insert	1/4	—	5/16	2-1/8
RRW316	Hex Key Ratchet Wrench Insert	1/4	3/4	3/16	2-3/16
RRW316C*	Hex Key Ratchet Wrench Insert	1/4	1/2	3/16	2-3/16
RRW316 / 316C	Hex Key Ratchet Wrench Combo Kit	1/4	3/4 - 1/2	3/16	2-3/16

Step Drills


Drill hole sizes from 1/8 to 1 in. through sheet metal without burring, deforming stock, or threading drill bit.

A unique double flute design assures the penetration of soft or thin materials at the proper speed.

Malco Step Drills actually deburr as they drill. Perfect for use as a "hole-opening" reamer. They can also be used for making round holes from slots or intersecting holes. Made of industrial grade high speed steel. Malco Step Drills are heat treated and tempered to assure maximum strength for long wearing rugged use. (Note: All sizes listed in inches).

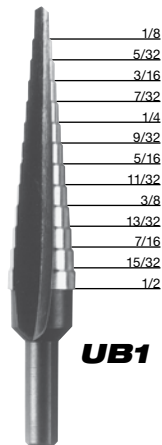


UB1

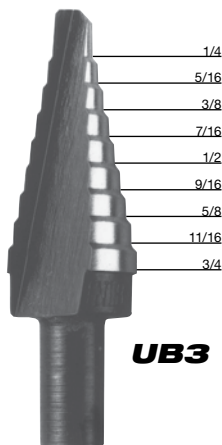

UB3



UB11

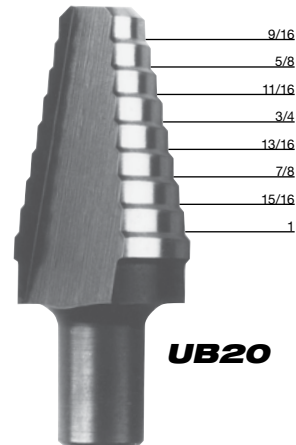

UB20

Specifications

Step Drills

Catalog Number	Description	Depth Each Step (in.)	Elect. Drill Size (in.)	Pilot Hole Required (in.)
UB1	Drills 13 hole sizes from 1/8 to 1/2 in. diameter in 1/32 in. (0.79) increments.	1/8	3/8	No
UB3	Drills 9 hole sizes from 1/4 to 3/4 in. diameter in 1/16 in. increments.	1/8	3/8	No
UB11	Drills 11 hole sizes from 1/4 to 7/8 in. diameter for creating 1/2 in. knock outs.	N/A	3/8	No
UB20	Drills 8 hole sizes from 9/16 to 1 in. diameter in 1/16 in. increments.	1/8	3/8	1/2

Hex Key Folding Sets

Catalog Number	W19	W29	W45
Description	Small Pocket	Deluxe Pocket	Large Sizes
Handle Length	3-5/8 in.	4-1/4 in.	5-1/4 in.
Number of Keys	9	9	5
Hex Sizes - Width Across Flats (in.)			
	.050	—	—
	1/16	—	—
	5/64	5/64	—
	3/32	3/32	—
	7/64	7/64	—
	1/8	1/8	—
	9/64	9/64	—
	5/32	5/32	—
	3/16	3/16	3/16
	—	7/32	7/32
	—	1/4	1/4
	—	—	5/16
	—	—	3/8



W29

Produced from tough alloy steel.

Hex Corners of keys are sharp and clean. Finish is black oxide.

Flat spring holds keys in any work position.

Smooth zinc plated case can be used as handle for extra leverage.



W12

7 Piece Set
Big 12 in. Length



Refrigeration Length Hex Keys

Available in 6 and 12 in. long series. Tough alloy steel with black oxide finish in clear storage tube.



W6

9 Piece Set
6 in. Length



WBL12S



Ball Tip Wrench Set

Two tools in one!
Standard hex end for maximum torque.
Ball end for angles.
Tough alloy steel.
Black oxide finish.



Cushioned Gripped Hex Key Sets

Big 6 and 9 inch sets consist of 8 sizes: 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, and 1/4 in.

WT6SG

6 in. Long "T" Handle Keys
8 Sizes (3/32 - 1/4 in.)

WT9SG

9 in. Long "T" Handle Keys
8 Sizes (3/32 - 1/4 in.)

WT618G	1/8 in. T-Hex Key 6 in. long. Individual
WT918G	1/8 in. T-Hex Key 9 in. long. Individual
WT6532G	5/32 in. T-Hex Key 6 in. long. Individual
WT9532G	5/32 in. T-Hex Key 9 in. long. Individual
WT6316G	3/16 in. T-Hex Key 6 in. long. Individual
WT9316G	3/16 in. T-Hex Key 9 in. long. Individual

Specifications

Hex Key Sets		Individual 6 in. Long Wrenches	
Catalog Number	Description		
WBL12S	12 Piece Ball Tip Wrench Set	WT618G	1/8 in. T-Hex Key 6 in. long
W19	9 Piece Hex Key Set (.050 - 3/16 in.)	WT6532G	5/32 in. T-Hex Key 6 in. long
W29	9 Piece Hex Key Set (5/64 - 1/4 in.)	WT6316G	3/16 in. T-Hex Key 6 in. long
W45	5 Piece Hex Key Set (3/16 - 3/8 in.)	9 in. Long "T" Handle Keys	
W6	6 in. 9 sizes: 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, and 1/4 in.	Catalog Number	Description
W12	12 in. 7 sizes: 5/64, 3/32, 1/8, 5/32, 3/16, 7/32, and 1/4 in.	WT9SG	9 in. Long T Handle Keys, 8 Sizes (3/32 - 1/4 in.)
Individual "L" 12 in. Long Hex Keys		9 in. Long "T" Handle Keys	
W12532	12 in. Long hex key size 5/32 in.	WT918G	1/8 in. T-Hex Key 9 in. long
6 in. Long "T" Handle Hex Keys		WT9532G	5/32 in. T-Hex Key 9 in. long
WT6SG	6 in. Long T Handle Keys, 8 Sizes (3/32 - 1/4 in.)	WT9316G	3/16 in. T-Hex Key 9 in. long

Electrical Pliers

PC9



Up Front Crimping Action

Insulated and uninsulated terminal and splice crimper with wire cutter up front.

Crimps insulated terminal sizes 12-10 (yellow) and 22-14 (red and blue). Tool also crimps uninsulated terminals 22-10 and 7-8 mm auto ignition terminals. Cuts bolts with perfect rethread and features six wire stripping stations for 22-10 ga. Constructed of induction hardened alloy steel. Pivot joint is made of hardened steel lifetime bushing. Black oxide oil finish with paint markings to highlight crimping functions. Red vinyl grips are comfortable, three pocket air cushion type.

WSC8



Cutter / Stripper / Crimper

Up front scissors action strips copper wire clean and easily cuts sizes 10 thru 20.

Bolt cutters leave a perfect rethread. Plier nose features serrated jaw and slim profile for pulling and putting loops on wire. Crimps all insulated and non-insulated solderless terminals including 7-8 mm auto. Lifetime pivot point assures greater joint strength and adds easy, precise adjustment capability. Black oxide, satin finish steel. Extra large red vinyl cushion grips.

WSC1S



Combination AWG-Metric

Automatic spring opening increases speed of stripping operation. Convenient lock protects precision cutting surfaces when not in use.

Rotary Percussion Bits

Carbide Tipped!



Use in any rotary or rotary percussion drilling device for unexcelled performance in brick, tile, granite, concrete, masonry and other similar hard and dense materials. Brazed tungsten carbide tips have 120° chamfer and are specially tempered for strength and long life.

Specifications

Carbide Tipped Rotary Percussion Bits

Catalog Number	Description	Nominal Overall Length (in.)	Bit Dia. (in.)	Shank Dia. (in.)
RP01	Carbide Tipped Rotary Bit	3	1/8	1/8
RP04	Carbide Tipped Rotary Bit	3-5/16	3/16	3/16
RP09	Carbide Tipped Rotary Bit	4	1/4	1/4
RP10	Carbide Tipped Rotary Bit	6	1/4	1/4

Spade Type Wood Bits



8 Sizes!

Uniquely designed ground points and cutting edges drill faster, cleaner holes, using less power than standard spade type bits. Cut straight or angled holes in soft and hard woods, plus formica, plaster, chipboard, foam core material, many non-metallic building sidings, and foam insulation. Made of one-piece special heat treated tool grade steel. • Six "flat" 1/4 in. shanks fit securely in conventional chucks. Easy to spot "size marking" is stamped on head. Resharpenable with saw file or grinder.

Specifications

Spade Type Wood Bits

Catalog Number	Description	Diameter in.	Overall Length in.	Shank Dia. in.
WB38	Spade Type Wood Bit	3/8	3/8	1/4
WB58	Spade Type Wood Bit	5/8	5/8	1/4
WB34	Spade Type Wood Bit	3/4	3/4	1/4
WB78	Spade Type Wood Bit	7/8	7/8	1/4
WB1	Spade Type Wood Bit	1	1	1/4
WB114	Spade Type Wood Bit	1-1/4	1-1/4	1/4
WB112	Spade Type Wood Bit	1-1/2	1-1/2	1/4

Specifications

Electrical Pliers

Catalog Number	Description	Capacities AWG	Capacities Metric (mm)	Capacities Bolt	Capacities Cutting	Crimping Gauge	Stripping Gauge	O/A Length in. (mm)	Net Weight oz. (g)
PC9	Electrical Pliers	—	—	4-40 / 6-32	8-32 / 10-32 / 10-24	22-10 ga.	22-10 ga.	8-3/4 (222)	7 (198)
WSC8	Electrical Pliers Cutter / Stripper / Crimper	—	—	4-40 / 5-40 / 6-32	8-32 / 10-32 / 10-24	22-10 ga.	22-10 ga.	8-1/4 (210)	8 (226)
WSC1S	Electrical Pliers Combination AWG-Metric	20-10 ga.	.080-2.60	—	—	—	—	6 (152)	4 (113)

There's an easier way to remove stubborn screws.



SEK1
10 Piece Screw
Extractor Kit

FJ60S

60 Piece
Jobber Drill Set
Wire Gauge Set



FJ6180

20 Piece
Orifice Drill Set
Includes: PV1 Pin Vice



PV1

Use in hand or insert in drill chuck.
Pin Vice holds wire gauge drill sizes 61 to 80.



- Kit contains 10 pieces total, including: 5 straight-fluted, extra-bite, hardened alloy steel extractors (sizes #1-5) and 5 matched left-handed cobalt drill bits: 5/64, 7/64, 5/32, 1/4, and 19/64 inch.
- Use for screw and bolt diameters of 1/4 inch (M3) to 5/8 inch (M15).

Individual replacement parts sold separately:

- SE1: #1 Extr. & 5/64-inch Cobalt Drill Bit
- SE2: #2 Extr. & 7/64-inch Cobalt Drill Bit
- SE3: #3 Extr. & 5/32-inch Cobalt Drill Bit
- SE4: #4 Extr. & 1/4-inch Cobalt Drill Bit
- SE5: #5 Extr. & 19/64-inch Cobalt Drill Bit



Sheet Metal Drills

Sheet metal drills with 135° split point design bite into metal precisely where wanted - will not wander.



Double Ender Sheet Metal Drills

Two points for twice the life, twice the convenience! Available in bulk packs!

Specifications

Catalog Number	Description	Set Contents	Capacity	Length in.	
10 Piece Screw Extractor Kit					
SEK1	10 Piece Screw Extractor Kit	5 straight fluted, hardened alloy steel extractors (sizes #1-5) & 5 matched left-handed cobalt drill bits. (sizes above)	—		
60 Piece Jobber Wire Gauge Set					
FJ60S	60 Piece Jobber Wire Gauge Set	Wire gauge sizes in metal DRILDEX container. Sizes: 1 to 60.			
20 Piece Orifice Drill Set					
FJ6180	20 Piece Orifice Drill Set	Wire gauges sizes for drilling or cleaning oil and gas orifices. Metal DRILDEX container. Sizes: 61 to 80. Includes pin vise.			
Pin Vise					
PV1	Pin Vise	—	Ga. sizes 61-80	2.25	
Sheet Metal Drills (Fractional Sizes)					
Catalog Number	Description	Decimal Equivalent	Length in.	Length of twist	Package Size
PFS1/8	Sheet Metal Drill Bit (Polished)	.1250	1-7/8	1/2	12
PFS30	Sheet Metal Drill Bit (Polished)	.1285	1-15/16	1/2	12
PFS1/4	Sheet Metal Drill Bit (Polished)	.2500	2-1/2	1/2	12
Double Ender Sheet Metal Drills					
DE1/8	Double Ender Sheet Metal Drill Bit (Polished)	.1250	2	1/2	12
DE1/8B	Bulk Pack Double Ender Sheet Metal Drill Bits (Polished)	.1250	2	1/2	144
DE30	Double Ender Sheet Metal Drill Bit (Polished)	.1285	2	1/2	12
DE30B	Bulk Pack Double Ender Sheet Metal Drill Bits (Polished)	.1285	2	1/2	144
DE9/64	Double Ender Sheet Metal Drill Bit (Polished)	.1406	1-15/16	1/2	12
DE3/16	Double Ender Sheet Metal Drill Bit (Polished)	.1875	2-3/16	1/2	12
DE1/4	Double Ender Sheet Metal Drill Bit (Polished)	.2500	2-1/2	1/2	12
NDE1/8	Double Ender Sheet Metal Drill Bit (Black Nitrided)	.1250	2	1/2	12
NDE30	Double Ender Sheet Metal Drill Bit (Black Nitrided)	.1285	2	1/2	12

Laminate Flooring Guillotine Shear

Quickly make square cuts in 5/16 in. (8 mm) laminate flooring.

Laminate flooring cut easier with Malco's Guillotine Shear for Laminate Flooring. The large stable plate with board-stop supports material to ensure square, straight cuts up to 8-1/4 in. (210 mm) long.

- No noisy operation
- No sharpening required
- Optimum leverage reduces fatigue
- Durable lightweight frame
- Cuts cleanly without distortion



FCC6

Guillotine Shear - Laminate Flooring

Catalog Number	Description	Flooring Capacity	Net Wt. lbs. (kg)
FCC6	Guillotine Shear - Laminate Flooring	5/16 in. (8 mm)	22 (9.98)

Utility Caulking Gun

CG10



Easy Dispensing Caulking Gun

Designed for longer dispensing life

CG18



Trigger adjustment screw compensates for normal wear to assure full dispensing stroke and extend tool life. Rotating barrel for maneuverability and easy caulk placement.

Flexible / Lightweight Caulking Gun

CG12



- Compact design stores in a toolbox
- Handy puncture wire
- Ladder size hang hook

Professional Caulking Gun

Square Piston Design

CG20



Minimizes worker fatigue. User can regulate stroke to fit hand. Handy puncture wire folds inside handle.

Specifications

Caulking Guns

Catalog Number	Description	Cartridge Capacity	Cartridge Diameter	Length in. (mm)	Net Wt. oz. (g)
CG10	Utility Caulking Gun	1/10 gallon	2 (51)	8-1/2 (216)	17 (482)
CG12	Flexible / Lightweight Caulking Gun	1/10 gallon	2 (51)	8-1/2 (216)	25 (709)
CG18	Versatile, Easy Dispensing Caulking Gun	1/10 gallon	2 (51)	8-1/2 (216)	28 (794)
CG20	Utility Caulking Gun	1/10 gallon	2 (51)	8-1/2 (216)	28 (794)

Break-Away Knife

BAK


Positive blade locking mechanism and a forever-sharp break-away point.
Supplied with 1 BAKRB blade in handle.



BAKRB (10 pack)

7 Point heavy duty break-away blades for model No. BAK.

Quick Open Utility Knife

9PK


"No tools" blade change is fast and easy with just a turn of the knob. Extra blades store in handle. Retractable blade advances to three locked cutting positions with aid of thumb button. Heavy duty, die-cast knife halves feature "integrated hinge" to eliminate lost or dropped parts. Contoured knife shape features "ergonomic safety grip". One blade supplied in retracting mechanism.



Twist knob to open



Displayed Open

Utility Knife


4PK

Die-cast heavy duty model comes complete with three double point blades. Safe, easy to operate, thumb action mechanism on top facilitates three cutting positions: fully extended, partially extended for carton opening, and intermediate.

Double Point Utility Blades

Extra durable, heavy gauge blades fit Malco 3PK, 4PK, 9PK knives & most other brands. Made of special alloy steel, precision ground to a fine cutting edge.

Quickly and safely dispense blades. Straight & Hook point blades are available in convenient 50 pack plastic dispenser.


UBS5 (5 pack)

UBS50 (50 pack)

UBH5 (5 pack)


Large hook points work great in multiple layers of asphalt shingles.

Specifications

Utility Knives		Replacement Blades	
Catalog Number	Description	Catalog Number	Description
BAK	7 Point Break-Away Knife	BAKRB	Break Away Blades (10 pack, 7 points)
4PK	3 Position Utility Knife (top button)	UBS5	Straight Double Point Blades (5 pack carded)
9PK	Quick Open Utility Knife	UBS50	Straight Double Point Blades (50 pack dispenser)
		UBH5	Hook Point Blades (5 pack carded)

Magnetic Tape Measures

Malco's "Magnetic Tip" tape measures are ideal for every ferrous metal working project! A powerful magnet and self-supporting 1 in. (25.4 mm) wide blade makes one-person measurements and measuring elevations an easy task.

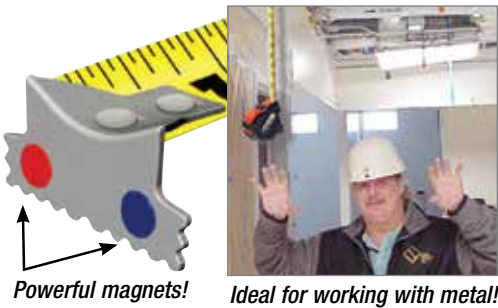

Powerful magnets!

Ideal for working with metal!

Magnetic!
Perfect for!

- One-Person Measurements
- Metal Ductwork
- Metal Stud Framing
- Pick-up tool!
- Ceiling Grids

Zero commencement:
when hanging and pulling magnet,
deduct 1/16 in. from measurement.



Non-Magnetic Tape Measures

Malco's non-magnetic tape measures offered in 25 in. and 30 in lengths. Both tape measures have a 1 in wide blade with a double riveted tip connection. A rubber-clad housing ensures toughness for everyday use.



Specifications

Tape Measures

Catalog Number	Description	Net Wt. oz. (g)	Catalog Number	Description	Net Wt. oz. (g)
T416M	1 in. x 16 ft. Magnetic Tip Tape Measure	10 (284)	CT425	1 in. x 25 ft. Tape Measure	13 (369)
T425M	1 in. x 25 ft. Magnetic Tip Tape Measure	14 (397)	CT430	1 in. x 30 ft. Tape Measure	16 (454)
T430M	1 in. x 30 ft. Magnetic Tip Tape Measure	17 (482)			



MW10 Distance Measuring Wheel

Foldable design with pistol grip, offers greater comfort and less wrist fatigue.

Malco's measuring wheel is offered in a popular 10-inch diameter that is versatile for many indoor and outdoor jobs.

Applications include: Fencing, paving, landscaping, grounds maintenance, irrigation, surveying, estimating, and more. Accurate gear driven 5-digit counter reads to 10,000 feet (3,048 m) and features a push button reset and a magnifying lens for easy reading. A polyvinyl wheel tread provides improved traction, and sealed ball bearings ensure smooth operation. Comfortable pistol grip, and a kickstand is permanently molded into the counter housing.



***Fold for easy storage.
Polyvinyl wheel treads assure
adequate traction on smooth
or rough surfaces.***

Specifications

Distance Measuring Wheels

Catalog Number	Description	Wheel Diameter in. (mm)	Wheel Circumference in. (cm)	Storage Length in. (mm)	Collapsed Length in. (mm)	Extended Length in. (cm)	Net Weight lbs. (kg)
MW10	10 in. Diameter Measuring Wheel	10 (254)	31.42 (79.8)	—	22 (55.9)	37 (94)	2.10 (0.95)

Aluminum Straight Edge Rule



48AR

Made from .125 thickness extruded aluminum. This 48 in. rule is 2 in. wide. Large and clear, easy to read, thermo-bonded red markings on gray finish. Can be read from either end. Graduations in eighths and sixteenths.



Tinner's Circumference Rules



48BS Semi-Flexible



48CR Heavy Duty

Standard bench rules with circumference readings for sheet metal work. Made from stainless steel which means they never need to be oiled. Fully etched markings are black filled for easy reading. 150 circumference inches in 1/8 in. increments both sides. Rules are 48 in. long x 1-1/4 in. wide.



Precision Multi-Use Combination Square

Use as a tri or miter square, height or depth gauge, or for striking parallel or right angle lines. A full view vial allows easy leveling or plumb work!

- 1/8, 1/16, 1/32 in., with cm and mm graduations permanently etched in stainless steel blade.
- Heavy-duty aluminum anvil has self-adjusting draw bolt for easy adjustment and set-up.
- Hardened steel scribe for making clean markings and lines stored in anvil.
- Precision-machined surfaces ensure accuracy.



SCS12
12 in. with solid mounted vial

Specifications

48 in. Straight Edge						
Catalog Number	Description	Upper Scale Graduations (in.)	Lower Scale Graduations	Graduations (in.)	Net Weight lbs. (oz)	
48AR	48 in. Aluminum Straight Edge Rule	—	—	Increments to 1/16	1 (16)	
48 in. Tinner's Circumference Rules						
48BS	48 in. Tinner's Circumference Rule (Semi-Flexible)	Increments to 1/16 both sides	150 circumference inches in 1/8 in. increments both sides	—	—	
48CR	48 in. Tinner's Circumference Rule (Heavy-Duty)	Increments to 1/16 both sides	150 circumference inches in 1/8 in. increments both sides	—	—	
Combination Square						
SCS12	Combination Square 12 in. with solid mounted vial	—	—	—	12 (340)	

Professional Grade Aluminum Torpedo Level



L9

- Professional grade solid aluminum frame.
- Three easy-read vials with white surrounds.
- V-grooved working edge for use on pipe and conduit.

Magnetic Aluminum Torpedo Level




L9M

- Full length magnetic strip.
- Professional grade solid aluminum frame.
- Three easy-read vials with white surrounds.
- V-grooved working edge for use on pipe and conduit.

Magnetic Tip Pocket Level

L5

- Strong Magnetic pick-up tip.
- V-Grooved edge fits pipe and conduit.
- Use to check electrical boxes and thermostats
- Durable plastic molded frame.



Specifications

Levels				
Catalog Number	Description	Line Length in. (mm)	Number of Vials	Net Weight oz. (g)
L5	Pocket Level with Magnetic Tip	5 (127)	1	—
L9	9 in. Top Reading Torpedo Level	9 (229)	3	—
L9M	9 in. Top Reading Torpedo Level with Magnetic Base	9 (229)	3	—

18.....56	AV6.....35	D8AST.....57	GOP23UK.....68	HP18KR.....54
24.....56	AV7.....35	D8HT100.....57	GOP23XRB.....68	HPD18.....54
1660.....98	AV8.....35	D8HTAST.....57	GOP23XUK.....68	HPD316.....54
5018.....4	AV9.....35	DB1.....55	GOP34UK.....68	HPD36M.....54
10627.....96	AVM7 EV.....36	DE1/4.....103	GOP34XRB.....68	HPD41M.....54
75046.....63	B	DE1/8.....103	GOP34XUK.....68	HPD63M.....54
127TCS.....63	BAK.....105	DE1/8B.....103	GOPRB.....68	HR1.....89
12F.....52	BAKRB.....105	DE3/16.....103	GOS1 EV.....69	HR1X.....89
12KH7.....94	BHE10.....48	DE30.....103	GOS2 EV.....69	HR2.....89
12KH8.....94	BHE12.....48	DE30B.....103	GOS3 EV.....69	HR2X.....89
18F.....52	BHE3.....48	DE9/64.....103	GOS4 EV.....69	HR4.....89
24F.....52	BHE6.....48	DEFT.....64	GOS5 EV.....69	HRA5.....88
274TCS.....63	BT131.....13	DEFT1.....64	GOSA1 EV.....69	HRP1.....89
2DH.....54	BT132.....13	DK6S.....77	GOT.....68	HRP2.....89
2IN1.....73	BT133.....13	DS1.....53	GOTRC.....68	HRP4.....89
3MC24.....95	BT134.....13	DS1C.....53	GSG6.....70	HRP5.....88
48AR.....108	BT141.....13	DS2.....53	H	HRP5RP.....88
48BS.....108	BT142.....13	DS3.....53	H30.....87	HR55.....88
48CR.....108	BT143.....13	DSKR.....15	H32.....87	HSB.....87
4DL6.....94	BT144.....13	DSKRBP.....15	H38.....87	HSRD.....87
4GT10.....95	BT153.....13	E	H44.....87	HSW68.....87
4GT7.....94	BT156.....13	ER3.....65	HA3.....86	HSW97.....87
4IN1.....49	BT163.....13	ER37.....73	HAD1.....48	HSX.....87
4IN1i.....49	BT164.....13	ER41.....73	HC1.....24	HW10X1/2Z.....11
4KH6.....94	BT231.....13	ER44.....73	HC1B.....25	HW10X1-1/2.....11
4KH7.....94	BT233.....13	ER45.....73	HC1D.....25	HW10X1Z.....11
4KH8.....94	C	ER46.....73	HC1E.....25	HW10X2.....11
4MC14.....95	C4R.....71	F	HC1G.....25	HW10X3/4Z.....11
4MC18.....95	C5A2.....27	FB1.....99	HC1H.....25	HW12X2.....11
4MC24.....95	C5A2RD EV.....27	FB1/2.....99	HC1I.....25	HW6X3/8Z.....11
4P6.....94	C5R.....41	FB3/4.....99	HC1K.....25	HW6X3/8ZCL.....11
4PK.....105	C6R.....41	FBS1BX.....58	HC2.....24	HW6X3/8ZMB.....11
4S6.....94	CB.....24, 25	FBS2BX.....58	HF1.....86	HW6X3/8ZRB.....11
4S8.....94	CB100.....24	FBSN.....58	HF10.....86	HW6X3/8ZW.....11
4TF14.....95	CBB.....24	FBSN1.....58	HF11.....86	HW7X1/2Z.....11
4TF18.....95	CDR.....55	FBSN2.....58	HF12.....86	HW7X1/2ZA.....11
6PMC.....95	CG10.....104	FBSNS.....58	HF13.....86	HW7X1/2ZCC.....11
8CG.....95	CG12.....104	FBSNW.....58, 59	HF14.....86	HW7X1/2ZCL.....11
8KH7.....94	CG18.....104	FCC4.....85	HF15.....86	HW7X1/2ZRB.....11
8PAP.....95	CG20.....104	FCC6.....104	HF16.....86	HW7X1/2ZW.....11
8PWB.....94	CGP18.....97	FCC7.....84	HF17.....86	HW8X1/2Z.....11
9MC10.....95	CGPR.....97	FCCB10.....85	HF18.....86	HW8X1-1/2Z.....11
9PK.....105	CONNEXT1.....45	FCCB12.....85	HF19.....86	HW8X1-1/2ZW.....11
A	CONNEXT2.....45	FCCB7.....85	HF2.....86	HW8X1Z.....11
A00.....56	CONNEXT3.....43, 45	FCFG.....82	HF3.....86	HW8X1ZRB.....11
A0.....56	CONNEXT4.....43	FCG2.....82	HF4.....86	HW8X1ZW.....11
A1.....56	CONNEXT5.....43	FCMS.....82	HF5.....86	HW8X2Z.....11
A10.....56	CR18.....73	FCP1.....91	HF6.....86	HW8X2ZW.....11
A2.....56	CS42D.....72	FCSR.....83	HF7.....86	HW8X3/4Z.....11
A20.....56	CS44D.....72	FDC1.....76	HF8.....86	HW8X3/4ZRB.....11
A3.....56	CT425.....106	FDC2.....76	HF9.....86	HW8X3/4ZW.....11
A40.....56	CT430.....106	FDC2.....77	HH4.....86	HW8X3ZW.....11
A50.....56	CUSTOM KITS.....17	FDSH.....77	HH5.....86	J
A60.....56	D	FJ60S.....103	HHA4.....86	JCC50R.....79
AA42D.....72	D4AST.....57	FJ6180.....103	HHA5.....86	JCC75R.....79
AA42DW.....72	D5100.....57	FP1.....90	HHD1.....45	JCCR.....79
AA44D.....72	D5AST.....57	FP2.....90	HHD1S.....45	L
AA44DW.....72	D6100.....57	FST.....98	HHD1T.....45	L5.....109
AC310.....98	D6AST.....57	FST2.....98	HHD2.....45	L9.....109
AC5M.....98	D6HT100.....57	FT195.....99	HHD2S.....45	L9M.....109
AMV6 EV.....36	D6HTAST.....57	FT500.....99	HHD2T.....45	M
AV1.....35	D7AST.....57	FTC1.....91	HHD3.....45	M12A.....31
AV2.....35	D7HT100.....57	G	HHD3S.....45	M12ARB.....37
AV3.....35	D7HTAST.....57	GND.....70	HHD3T.....45	M12N.....29


M12NG.....29	MSHL516T.....45	PV1.....103	SRC24A2 SV.....96	TX30IP.....47
M12NRB.....29	MSHL716.....45	PWS1.....59	SRT2.....81	TX30XIP.....47
M12RB.....31	MSHL716I.....47	PWS2.....59	SRT2B.....81	TY34.....75
M14A.....31	MSHLC.....8	PWSK1.....58	SS/SS42D.....72	TY4.....74
M14N.....29	MSHLC1.....8	R	SS/SS44D.....72	TY48.....75
M14NRB.....29	MSHML14.....45	R308.....99	SS/SS46D.....72	TY4G.....74
M14RB.....31	MSHML14I.....47	RB400.....63	SS/SS48D.....72	TY6.....74
M15.....37	MSHML516.....45	RBW97.....87	SS42D.....72	U
M2000S.....33	MSHMLC.....8	RD6.....49	SS43D.....72	UB1.....100
M2001.....33	MSHMLC1.....8	RH4.....55	SS44D.....72	UB11.....100
M2002.....33	MSHMLCM1.....9	RH4V.....55	SS46D.....72	UB20.....100
M2003.....33	MSHMLCM2.....9	RP01.....102	ST94.....99	UB3.....100
M2004.....33	MSHMLCM3.....9	RP04.....102	STC650.....63	UBH5.....105
M2005.....33	MSHXL14.....45	RP09.....102	STKMR.....14	UBS5.....105
M2006.....33	MSHXL14I.....47	RP10.....102	STKMRBP.....14	UBS50.....105
M2007.....33	MSHXL14T.....45	RRW3.....100	T	UC1.....61
M9.....37	MSHXL38.....45	RRW316.....100	T416M.....106	ULC10.....37
MB48A.....50	MSHXL38I.....47	RRW316/316C.....100	T425M.....106	ULV10.....80
MB48B.....51	MSHXL516.....45	RRW316C.....100	T430M.....106	ULV10RB.....80
MB48B2.....51	MSHXL516I.....47	RRW4.....100	TB1.....17	V
MB48B3.....51	MSHXL516T.....45	RRW5.....100	TBP33.....16	VCB1.....81, 93
MB48B4.....51	MSHXL.....8	RRW516.....100	TC127.....63	VCB2 EV.....81, 93
MBH14.....48	MSHXL1.....8	RRW6.....91	TC174.....63	VCB3 EV.....93
MBL.....50	MSHXL1C1.....9	RSW68.....87	TC274.....63	VFN1.....92
MBL.....51	MSHXL1C2.....9	RTC623.....63	TC312.....63	VFN2.....92
MBLP2.....48	MSHXL1C3.....9	RTC829.....63	TC400.....63	W
MBLP3.....48	MT10.....93	RW127.....63	TNP2CL.....70	W12.....101
MBLP4.....48	MT12.....93	RW274.....63	TNP2R.....70	W12532.....101
MBSP2.....48	MT6.....93	S	TNP2S.....70	W19.....101
MC12A.....31	MT7.....93	S10.....64	TNP3S.....70	W29.....101
MC12N.....29	MV12.....80	S11.....64	TNP3SB.....70	W45.....101
MC12NG.....29	MV12RB.....80	S2R.....39	TNP3SH.....70	W6.....101
MC12NRB.....29	MW10.....107	S3R.....39	TR18.....56	WB1.....102
MC12RB.....31	N	S5R.....39	TR42.....56	WB112.....102
MC14A.....31	N1R.....41	S6R.....39	TS1.....20	WB114.....102
MC14N.....29	N2R.....41	S9R.....39	TSMD.....20	WB118.....102
MC14NRB.....29	NDE1/8.....103	SC1.....41, 57	TSMD.....20	WB34.....102
MC14RB.....31	NDE30.....103	SC2.....71	TSCG.....19	WB38.....102
MCCB7.....65	NHP1R.....78	SC3R.....41	TSCM.....21	WB58.....102
MD10.....37	NSC1 EV.....67	SCS12.....108	TSCMRB.....21	WB78.....102
MD12.....37	NSP1 EV.....67	SCSRC1.....66	TSDC.....19	WBL12S.....101
MS12.....73	NSP1RP EV.....67	SCSRC1RB.....66	TSF1.....23	WSC1S.....102
MS12RK.....73	P	SD1.....48	TSF1RBN.....23	WSC8.....102
MS12RS.....73	PA1012.....11	SD1IP.....47	TSF2.....23	WT618G.....101
MSH14.....45	PA1012K.....11	SD1XIP.....47	TSF2RB.....23	WT6316G.....101
MSH14I.....47	PA1012KW.....11	SD2.....48	TSHD.....19	WT6532G.....101
MSH14T.....45	PA1416.....11	SD2IP.....47	TSHDRB.....19	WT6SG.....101
MSH38.....45	PA810.....11	SD2XIP.....47	TSMDRB.....20	WT918G.....101
MSH38I.....47	PC1 EV.....62	SDX1.....48	TSNS1.....21	WT9316G.....101
MSH516.....45	PC9.....102	SDX2.....48	TSNS1RB EV.....21	WT9532G.....101
MSH516I.....47	PFS1/4.....103	SEK1.....103	TSS1.....22	WT9SG.....101
MSH516T.....45	PFS1/8.....103	SG10.....64	TSS1RB EV.....22	
MSHC.....8	PFS30.....103	SG11.....64	TSV1.....22	
MSHC1.....8	PH2IP.....47	SH3.....55	TSV1RB.....22	
MSHCM1.....9	PH2XIP.....47	SH3V.....55	TX10IP.....47	
MSHCM2.....9	PH3IP.....47	SL1R.....41	TX10XIP.....47	
MSHCM3.....9	PH3XIP.....47	SL2R.....71	TX15IP.....47	
MSHL14.....45	PL1R.....97	SL5.....78	TX15XIP.....47	
MSHL14I.....47	PLD1.....97	SL8R.....78	TX20IP.....47	
MSHL14T.....45	P08X2ZW.....11	SM1.....60	TX20XIP.....47	
MSHL38.....45	PS10X1/2Z.....11	SM2.....60	TX25IP.....47	
MSHL38I.....47	PS10X3/4Z.....11	SNC.....83	TX25XIP.....47	
MSHL516.....45	PS8X1/2Z.....11	SRC24A.....96	TX27IP.....47	
MSHL516I.....47	PT1.....62	SRC24A1 EV.....96	TX27XIP.....47	



www.malcotools.com



www.malcotools.com



Malco TOOL BOOK

TOOLS, FASTENERS AND ACCESSORIES



Malco Products, SBC

Annandale, Minnesota U.S.A.

14080 State Hwy 55 NW • PO Box 400

Annandale, MN 55302-0400 • ©2021



YOUR AUTHORIZED MALCO DEALER